



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HC-D 7-TFL-57/M1PG11G

Order No.: 1773048



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1773048>

Sleeve housing, for single locking latch, height 57 mm, with screw connection, 1 x Pg11, straight cable entry, material zinc

| Commercial data | |
|--------------------------|--------------------|
| EAN | 4017918122317 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Weight/Piece | 0.08027 KG |
| Catalog page information | Page 508 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|--------------|---------------------------------------------------|
| Note | For contact inserts HC-D7, D8, A3, A4, B5, HS2-D7 |
| Design | D7 |
| Height | 57 mm |
| Width | 28 mm |

| | |
|---------------------------------|--------------------------------|
| Length | 26.5 mm |
| Housing type | Sleeve housings |
| Locking type | for single locking latch |
| Type of the screw connection | 1x Pg11 |
| Pg screw connection | With |
| Wrench size, union nut | 18 mm |
| Cable exit | Straight |
| External cable diameter | 7.5 mm ... 12.5 mm |
| Degree of protection | IP54 / IP65 with sealing screw |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | see above |
| Housing surface material | Powder-coated, gray |
| Cable gland material | Nickel-plated brass |
| Cable seal material | NBR |

Certificates / Approvals



Certification GOST

Accessories


| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

Assembly

| | | |
|---------|----------------|------------------------------------|
| 1686229 | HC-D 7-DS-IP65 | Sealing screw, for IP65 protection |
|---------|----------------|------------------------------------|

Diagrams/Drawings

Dimensioned drawing

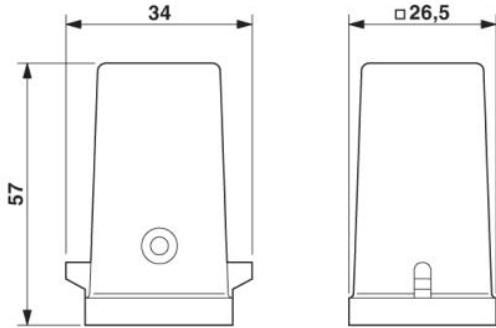

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;