![Chipsmall logo]

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

Weidmüller ∃€

**Terminal markers
WS 12/5 FSZ 1-10**

Halogen Free   RoHS COMPLIANT
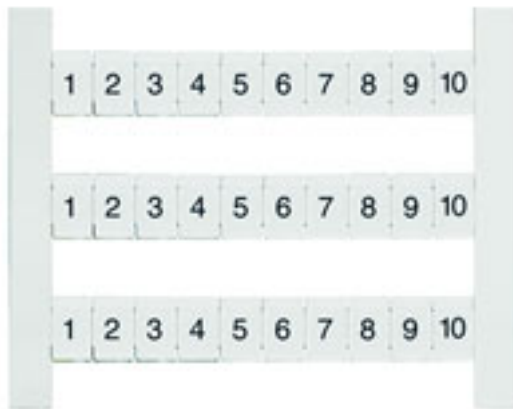
WS markers are the perfect match for the connectors of the W series. But thanks to their system compatibility the WS tags can also be used with the I series and the Z series. The large areas for printing permit not only long character strings but also multiple lines.
WS markers are ideal for labels with long, bespoke character strings. The tried-and-tested MultiCard format means that printing can be carried out with **laser** printers, **PrintJet**, **plotters** or the **MC-Mobilo.**

• Can be fitted in strips or singly
• Markers in proven multicard format

General ordering data

Order No.	1773430001
Type	WS 12/5 FSZ 1-10
Version	Terminal markers, Card, 12 x 5 mm, Polyamide, Colour: White
GTIN (EAN)	4032248141326
Qty.	300 pc(s).

Creation date April 17, 2013 5:28:55 PM CEST

**Terminal markers
WS 12/5 FSZ 1-10**

Technical data

Dimensions and weights

Length	12 mm	Width	5 mm
Net weight	0.14 g		

Markings

Cadmium	No	Colour	White
Colour of printing	Black	Conductor O.D.	
Halogen	No	Material	Polyamide
Material colour according to resistance code	9	Operating temperature range, max.	100 °C
Operating temperature range, min.	-40 °C	Orientation of print	vertical
Pin can be written (STI)	Yes	Pitch in mm (P)	5 mm
Printed characters	Numbers	Printing method	Plotter printing with india ink
Silicone	No	UL 94 flammability rating	V-2

Classifications

ETIM 2.0	EC000761	ETIM 3.0	EC000761
UNSPSC	30-21-18-07	eClass 4.1	24-19-02-19
eClass 5.1	27-14-11-37	eClass 6.2	27-14-11-37
eClass 7.1	27-14-11-37		

Approvals

ROHS	Conform

Creation date April 17, 2013 5:28:55 PM CEST