imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



	4
	THIS DRAWING IS UNPUBLISHED. C COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIG
D	
	NOTE:
	 MATERIAL: HOUSING: THERMOPLASTIC HIGH TEMP., UL 94V-0 CONTACT: PHOSPHOR BRONZE, THICKNESS: 0.25mm
	SHIELD: PHOSPHOR BRONZE, THICKNESS: 0.40mm. 2. FINISH: CONTACT: GOLD FLASH OVER 30u" MIN. PALLADIUM-NICKEL PLATING OF 100u" MIN. MATTE-TIN PLATED ON SOLDE 50u" MIN. NICKEL UNDERPLATED ALL OVE SHIELD: 100u" MIN. HALF-BRIGH TIN PLATED OVER UNDERPLATED ALL OVER.
С	 REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B. RoHS 2002/95/EC COMPLIANT CHOOSE PRE-FIX FROM LEFT TABLE AND SUFFIX FR RIGHT TABLE FOR DESIRED PART NUMBER COMBINATION
B	
A	1470-19 (1/08)


FOR PUBLICATION


LL RIGHTS RESERVED.

V-0 COLOR: GRAY. 25mm.)mm.


NG ON CONTACT AREA, SOLDER TAILS OVER. OVER 80u" MIN. Cu

FROM BINATION.

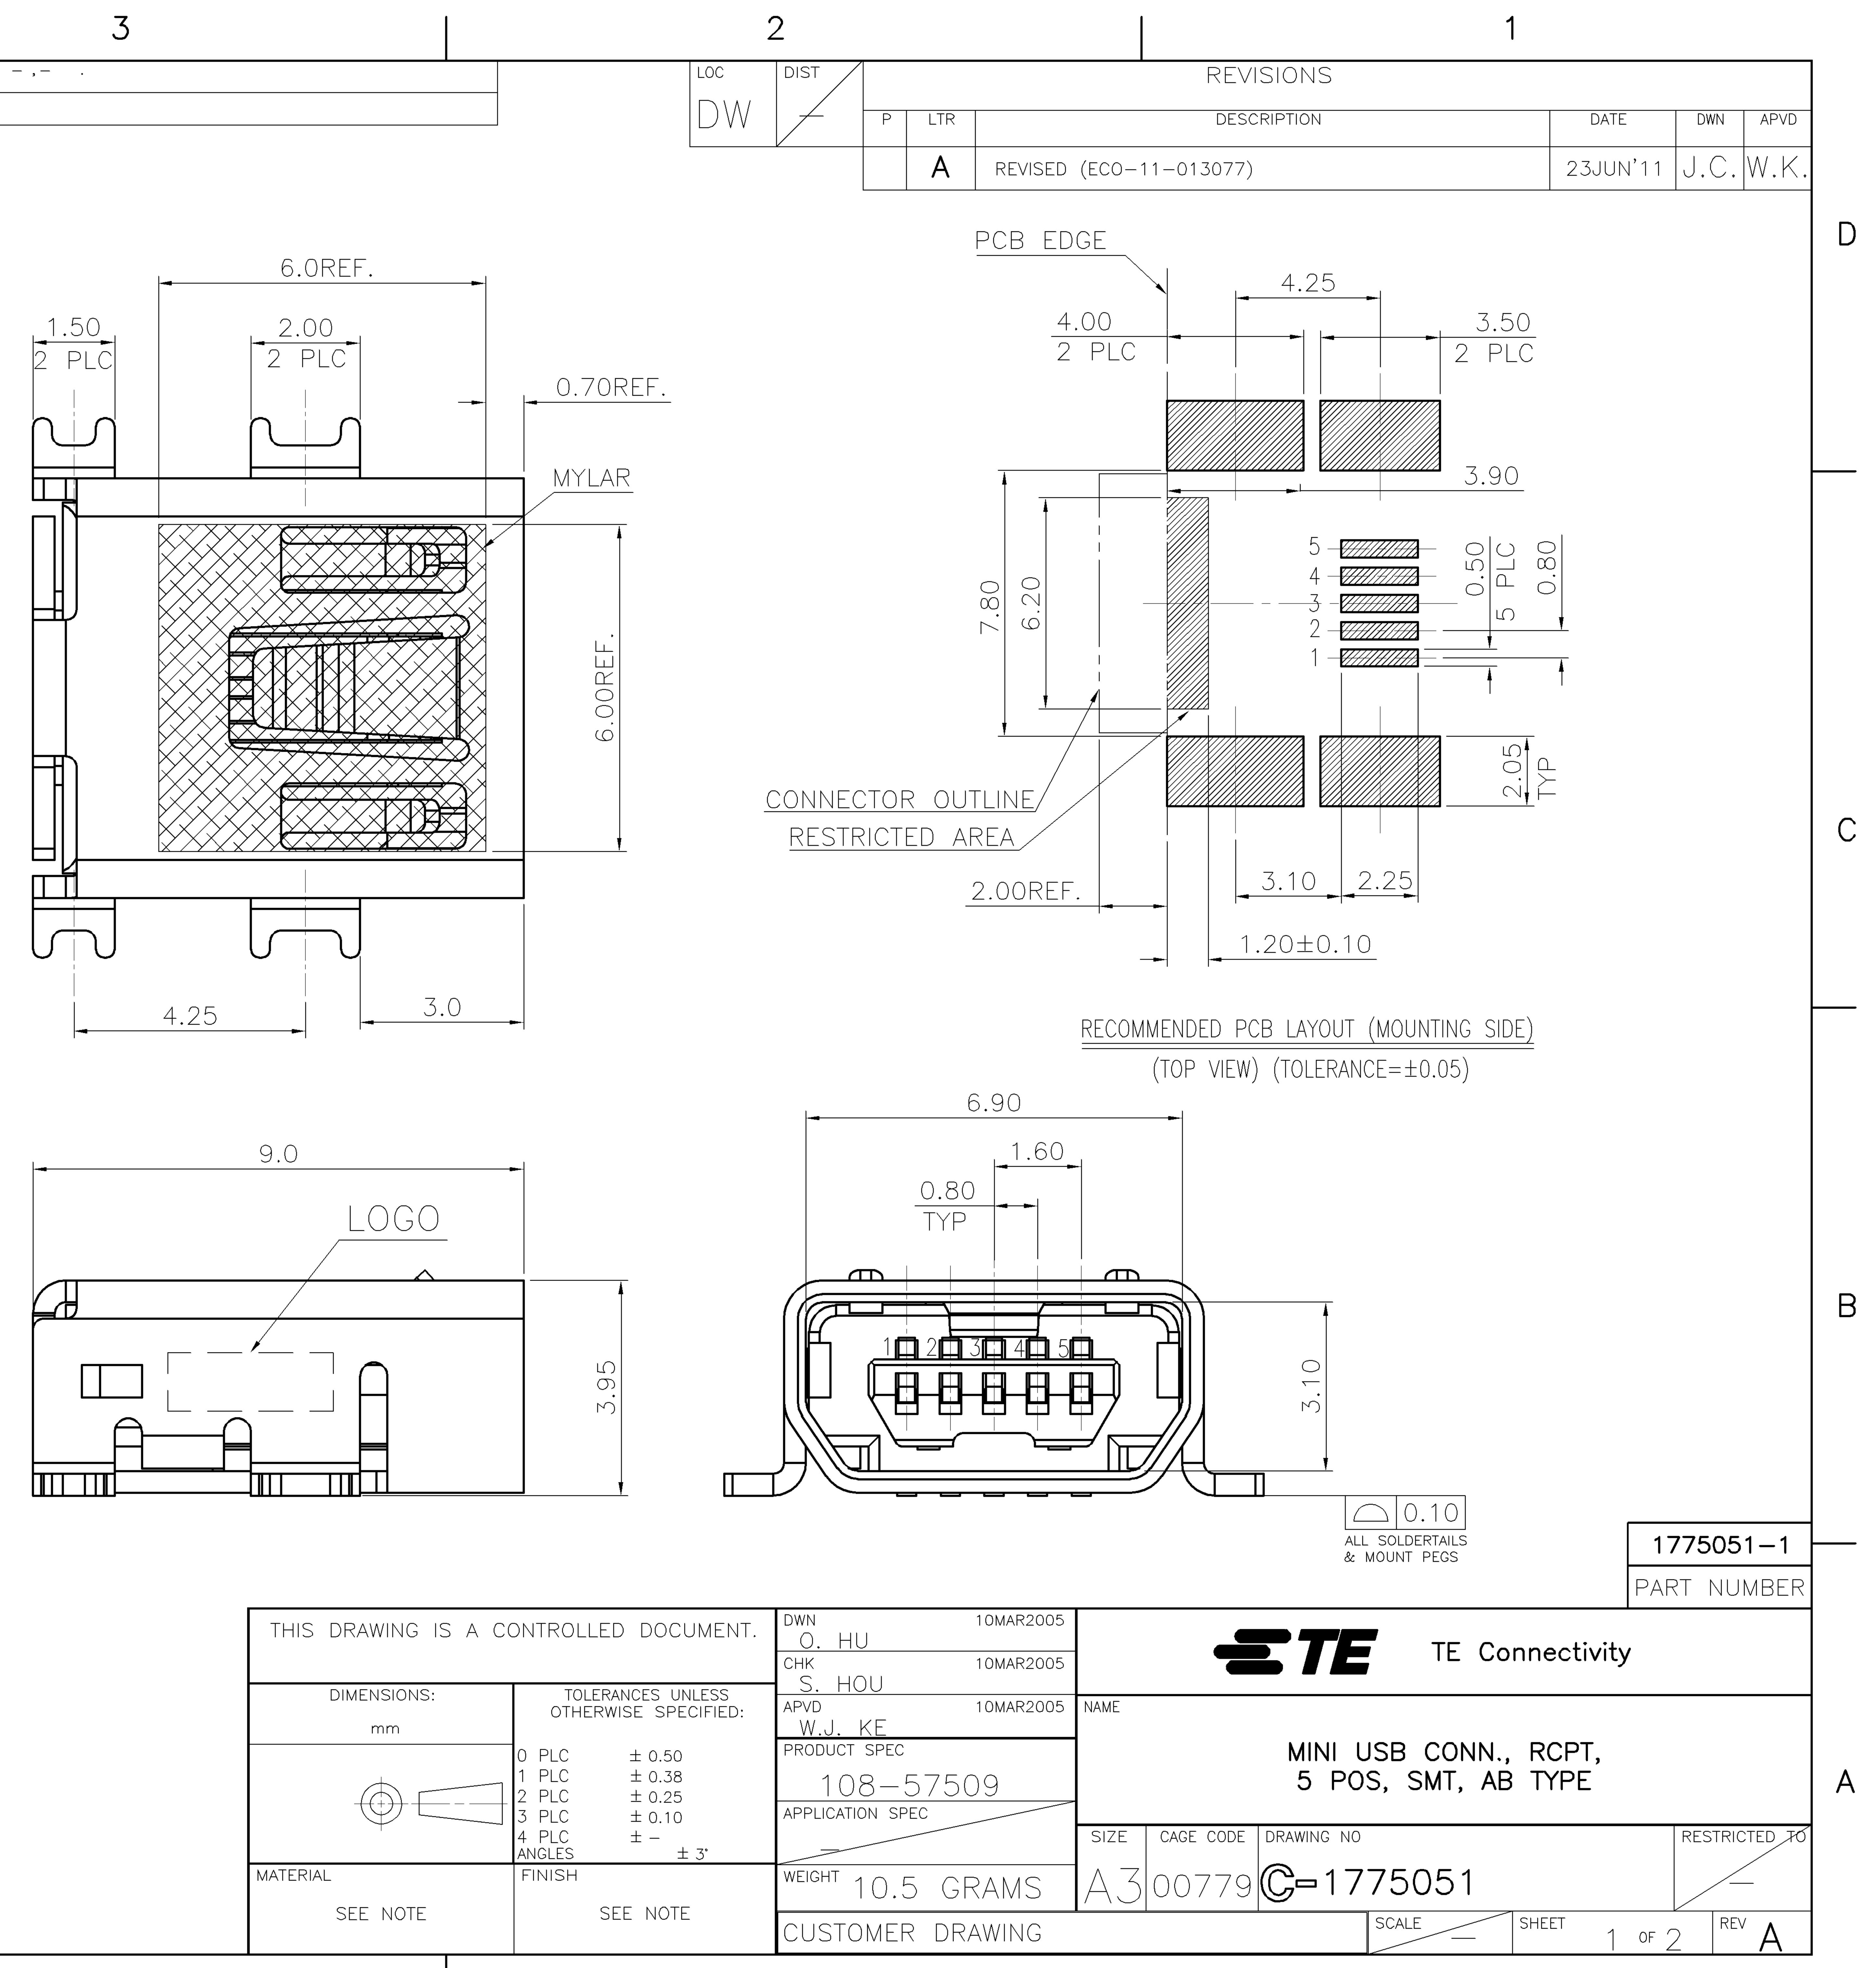


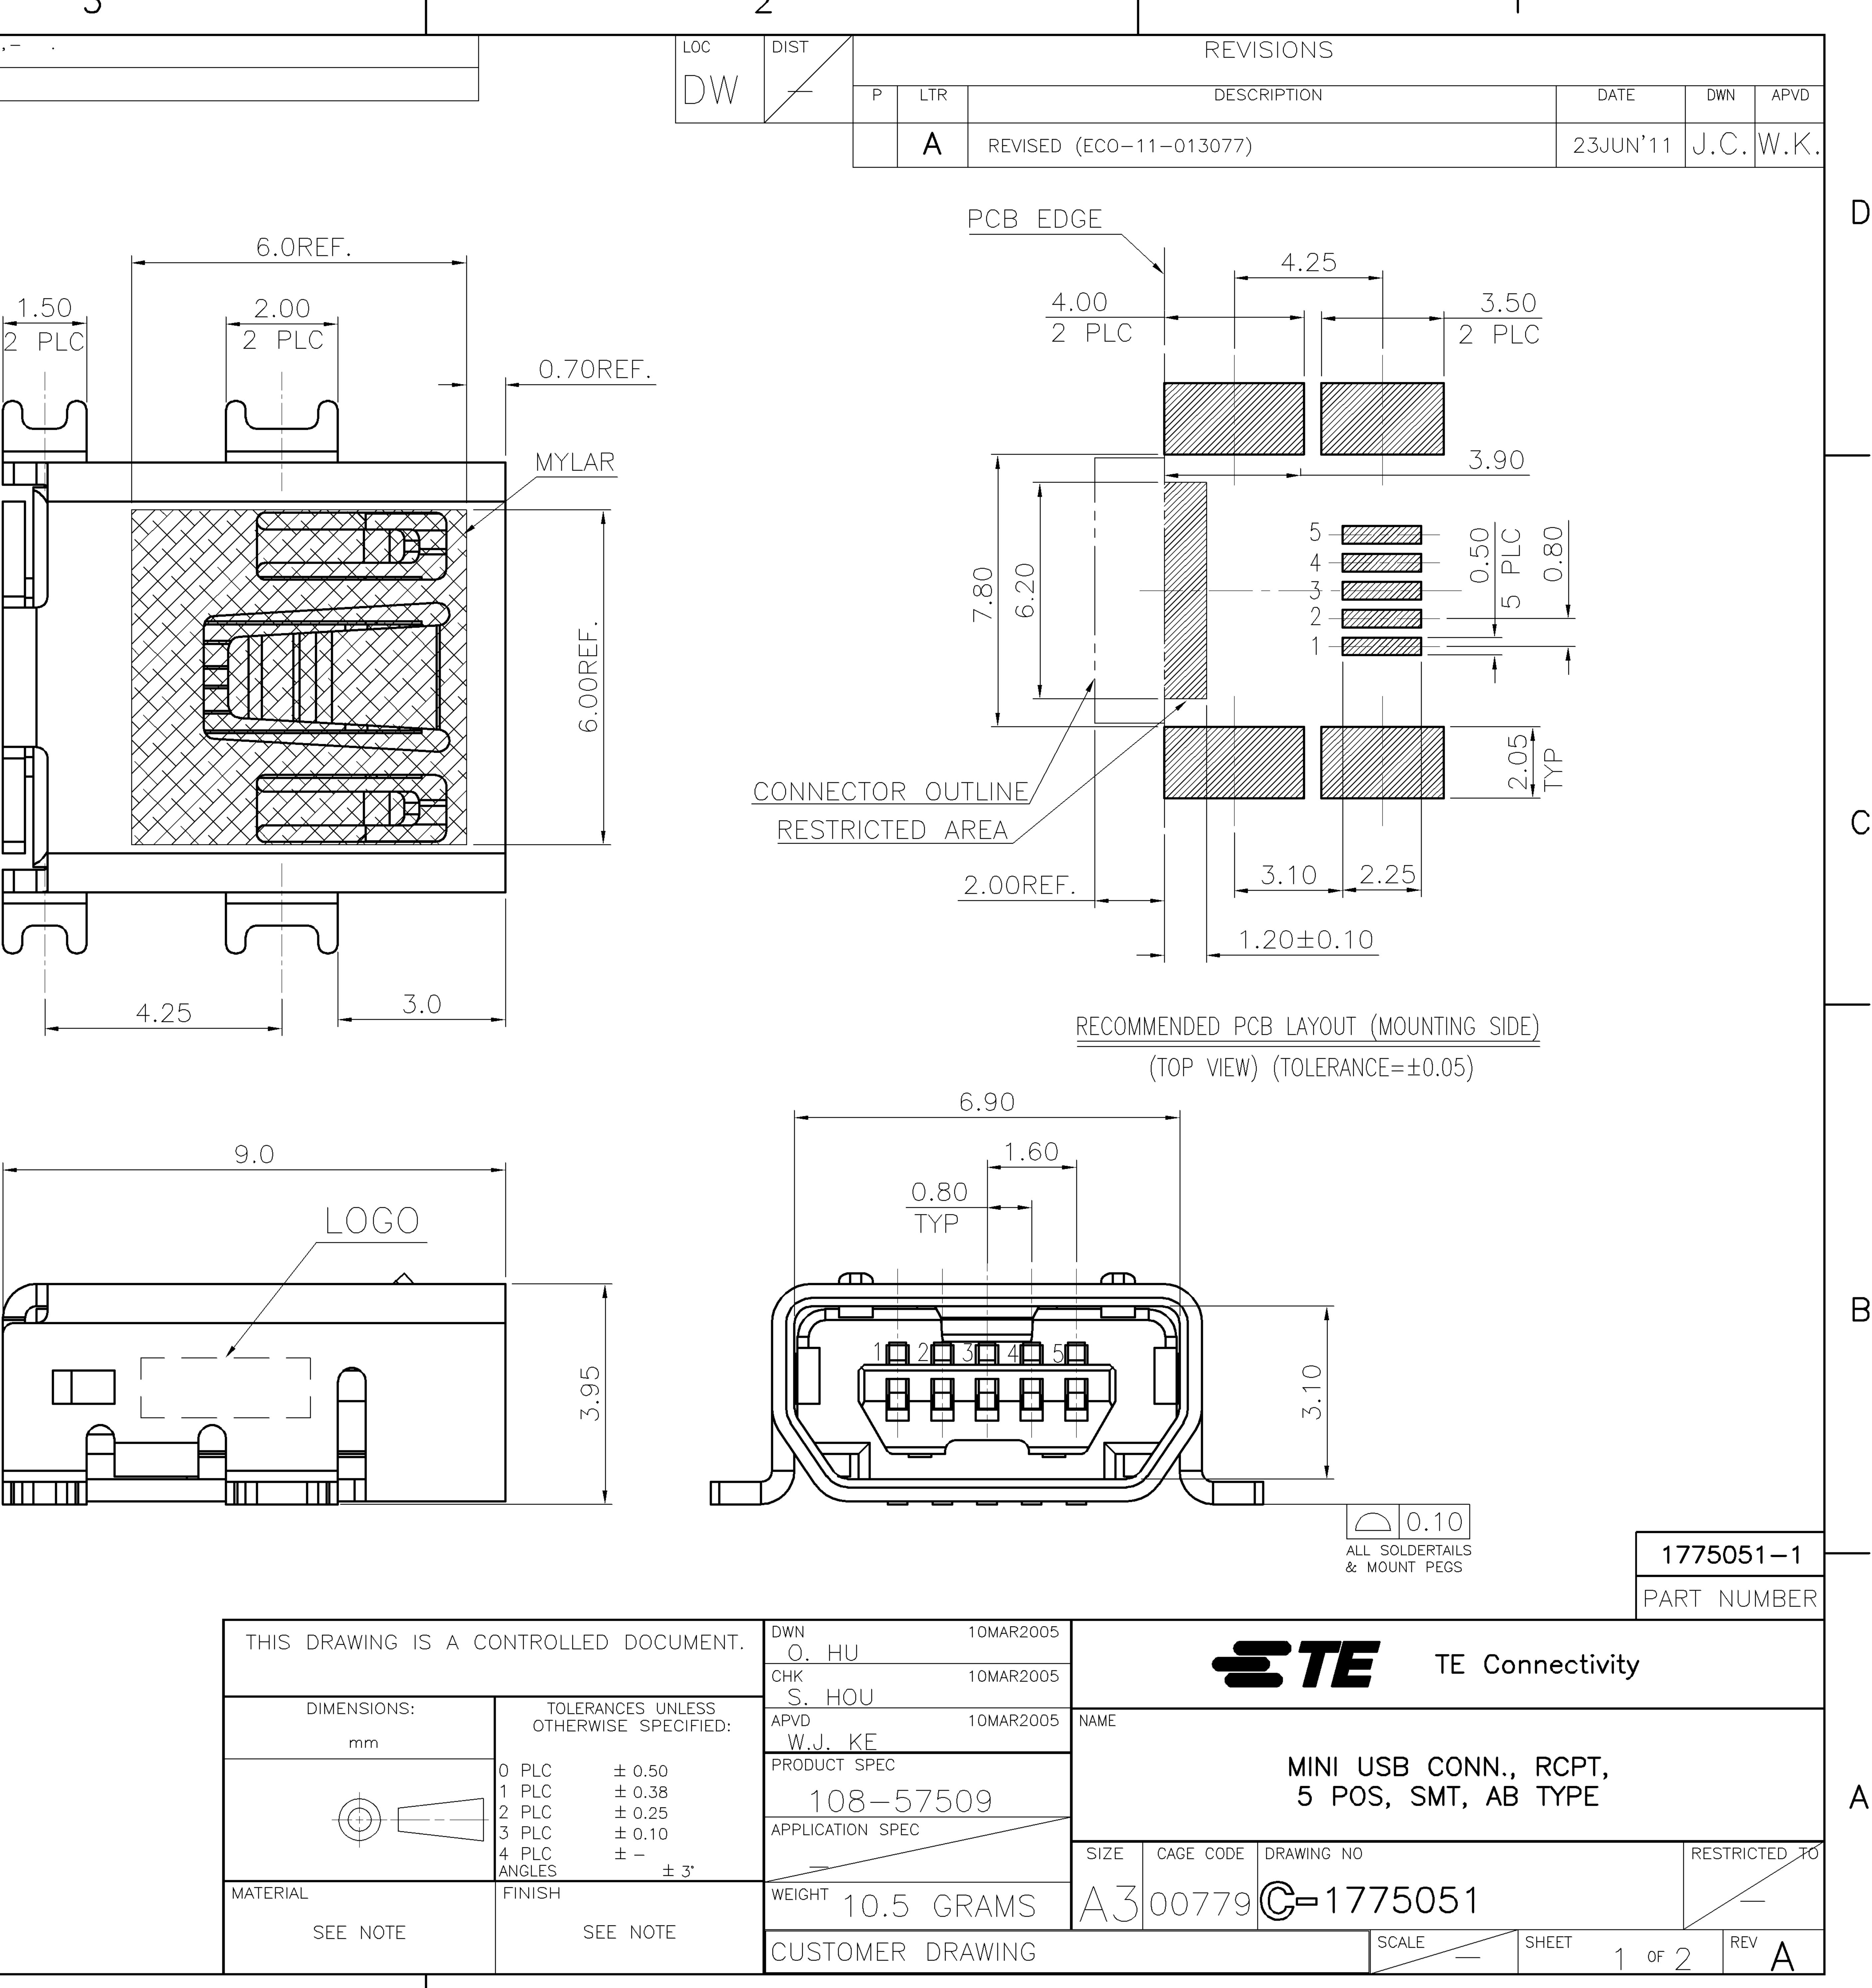



THIS DRAWING IS
DIMENSIONS:
mm
MATERIAL
SEE NOTE

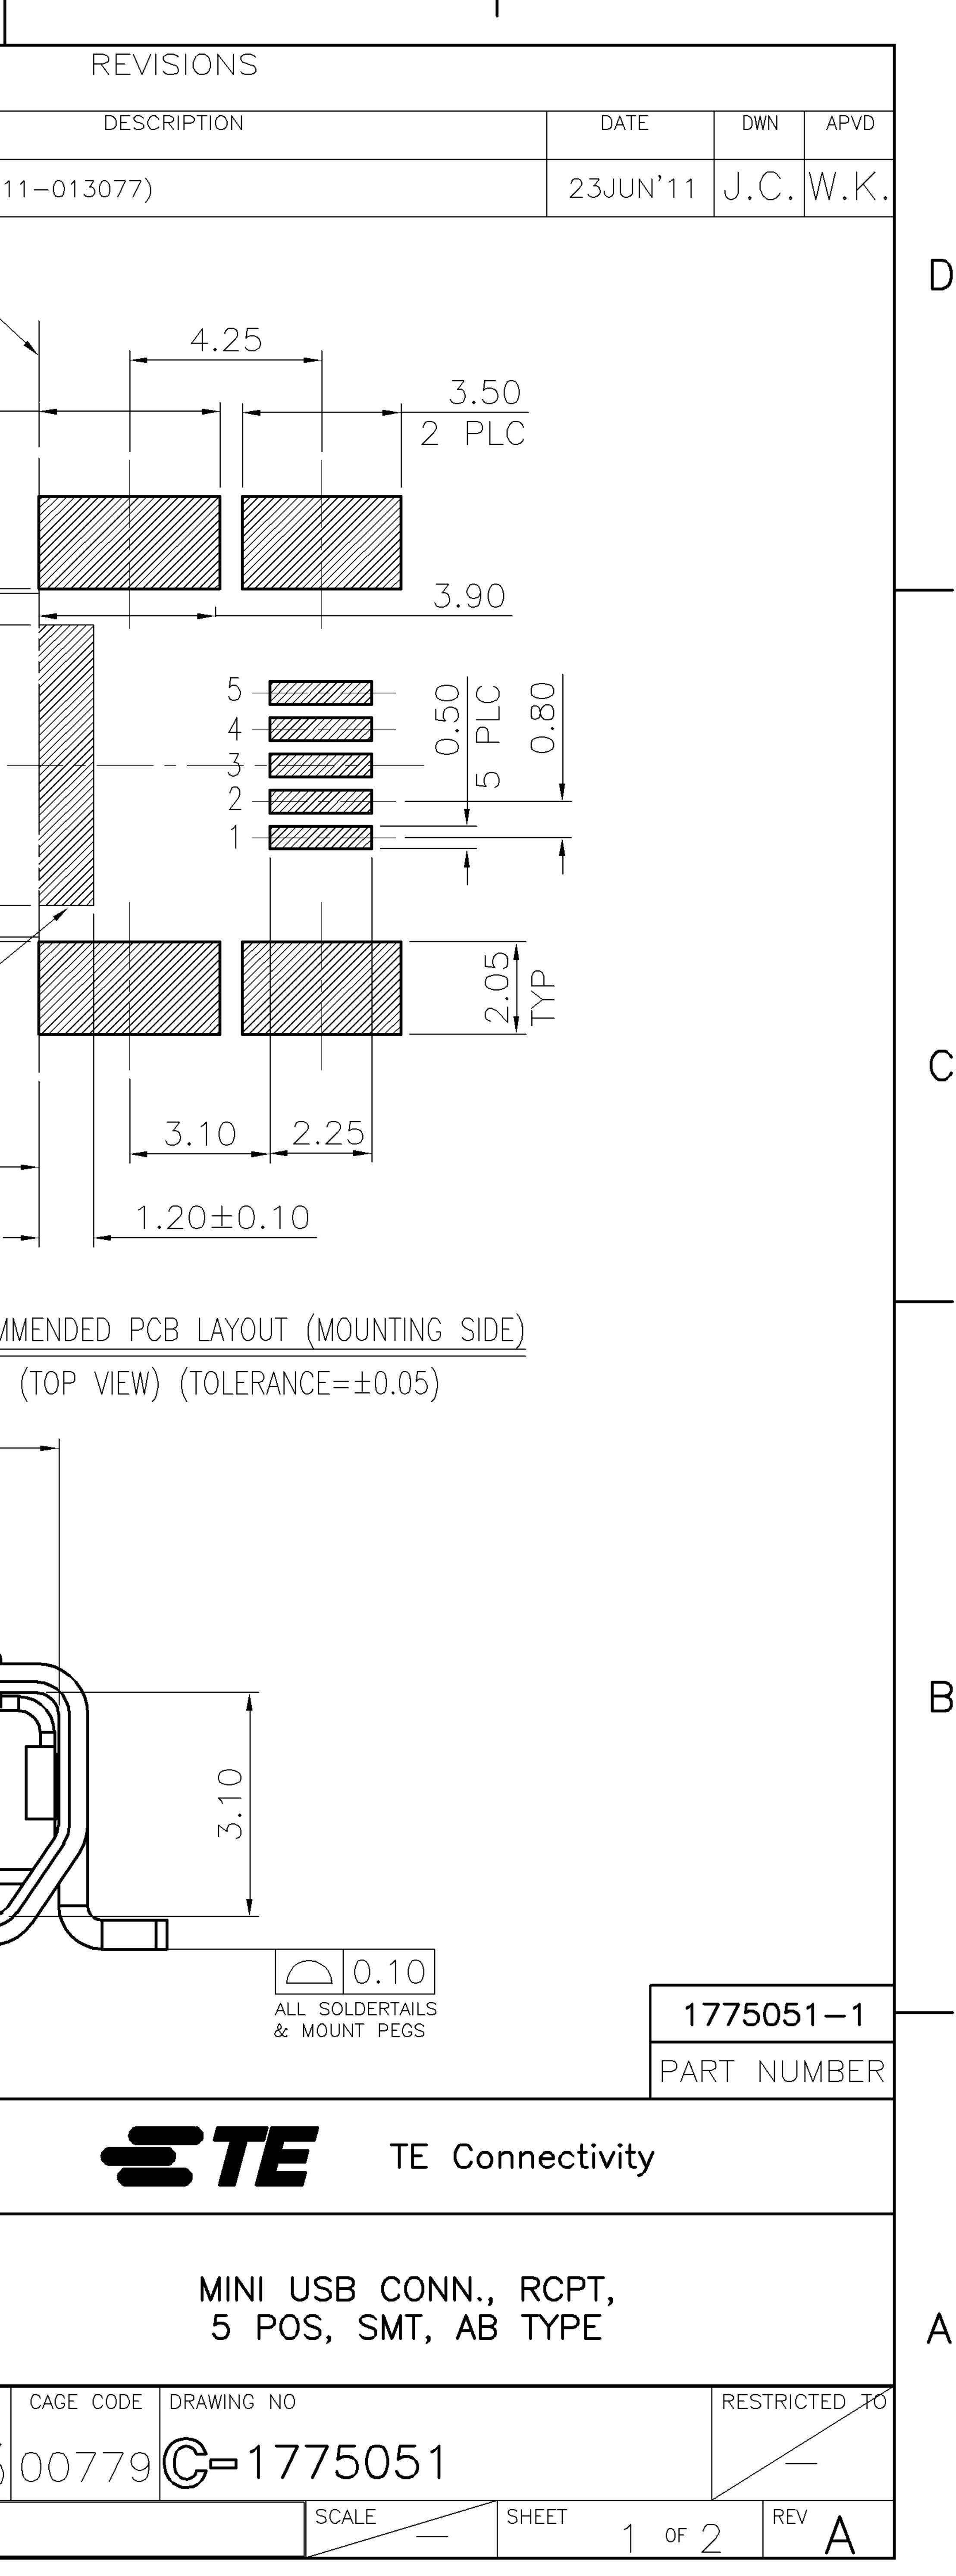



S A CO	DNTROLLE	D DOCUMENT.	DWN	10MAR2005		
			O. HU Chk	10MAR2005		
		ANCES UNLESS VISE SPECIFIED:	<u>S. HOU</u> apvd W.J. KE	10MAR2005	NAME	
	0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	± 0.50 ± 0.38 ± 0.25 ± 0.10 $\pm -$ $\pm 3^{\circ}$	PRODUCT SPEC 108-5 APPLICATION SPEC	7509	SIZE	C,
	FINISH		weight 10.5	GRAMS	AJ	0
	5	EE NOTE	CUSTOMER	DRAWING		-

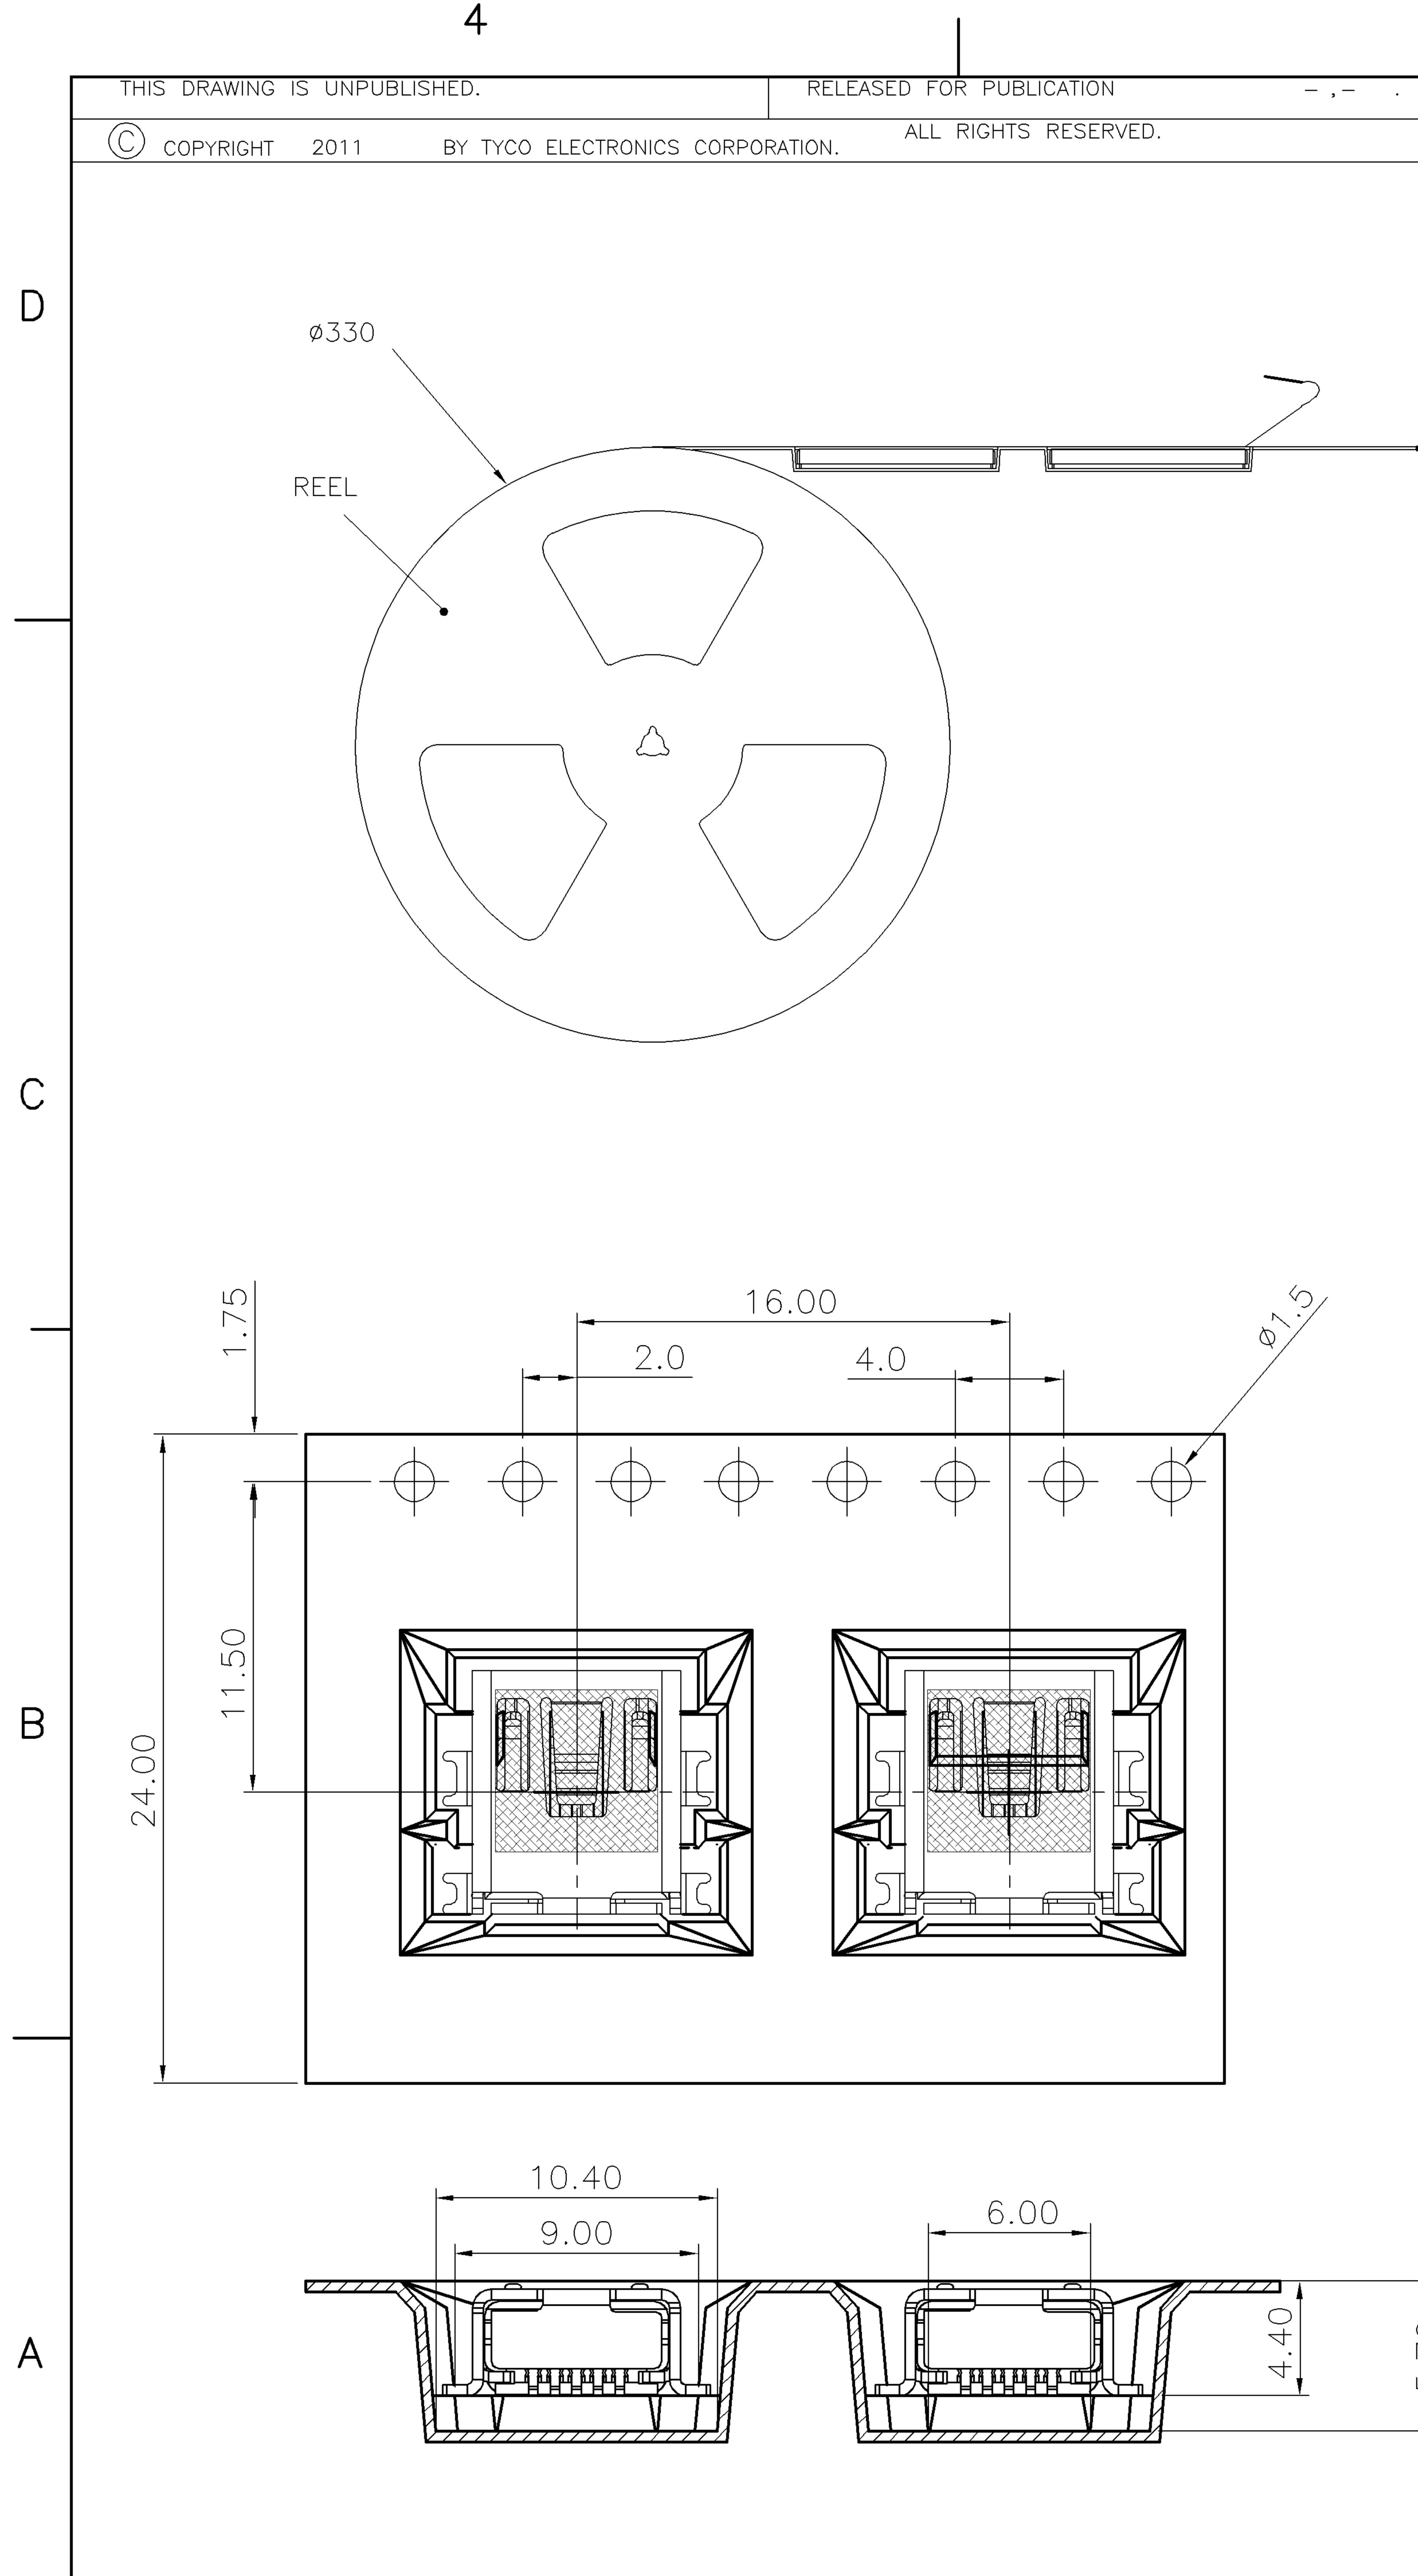


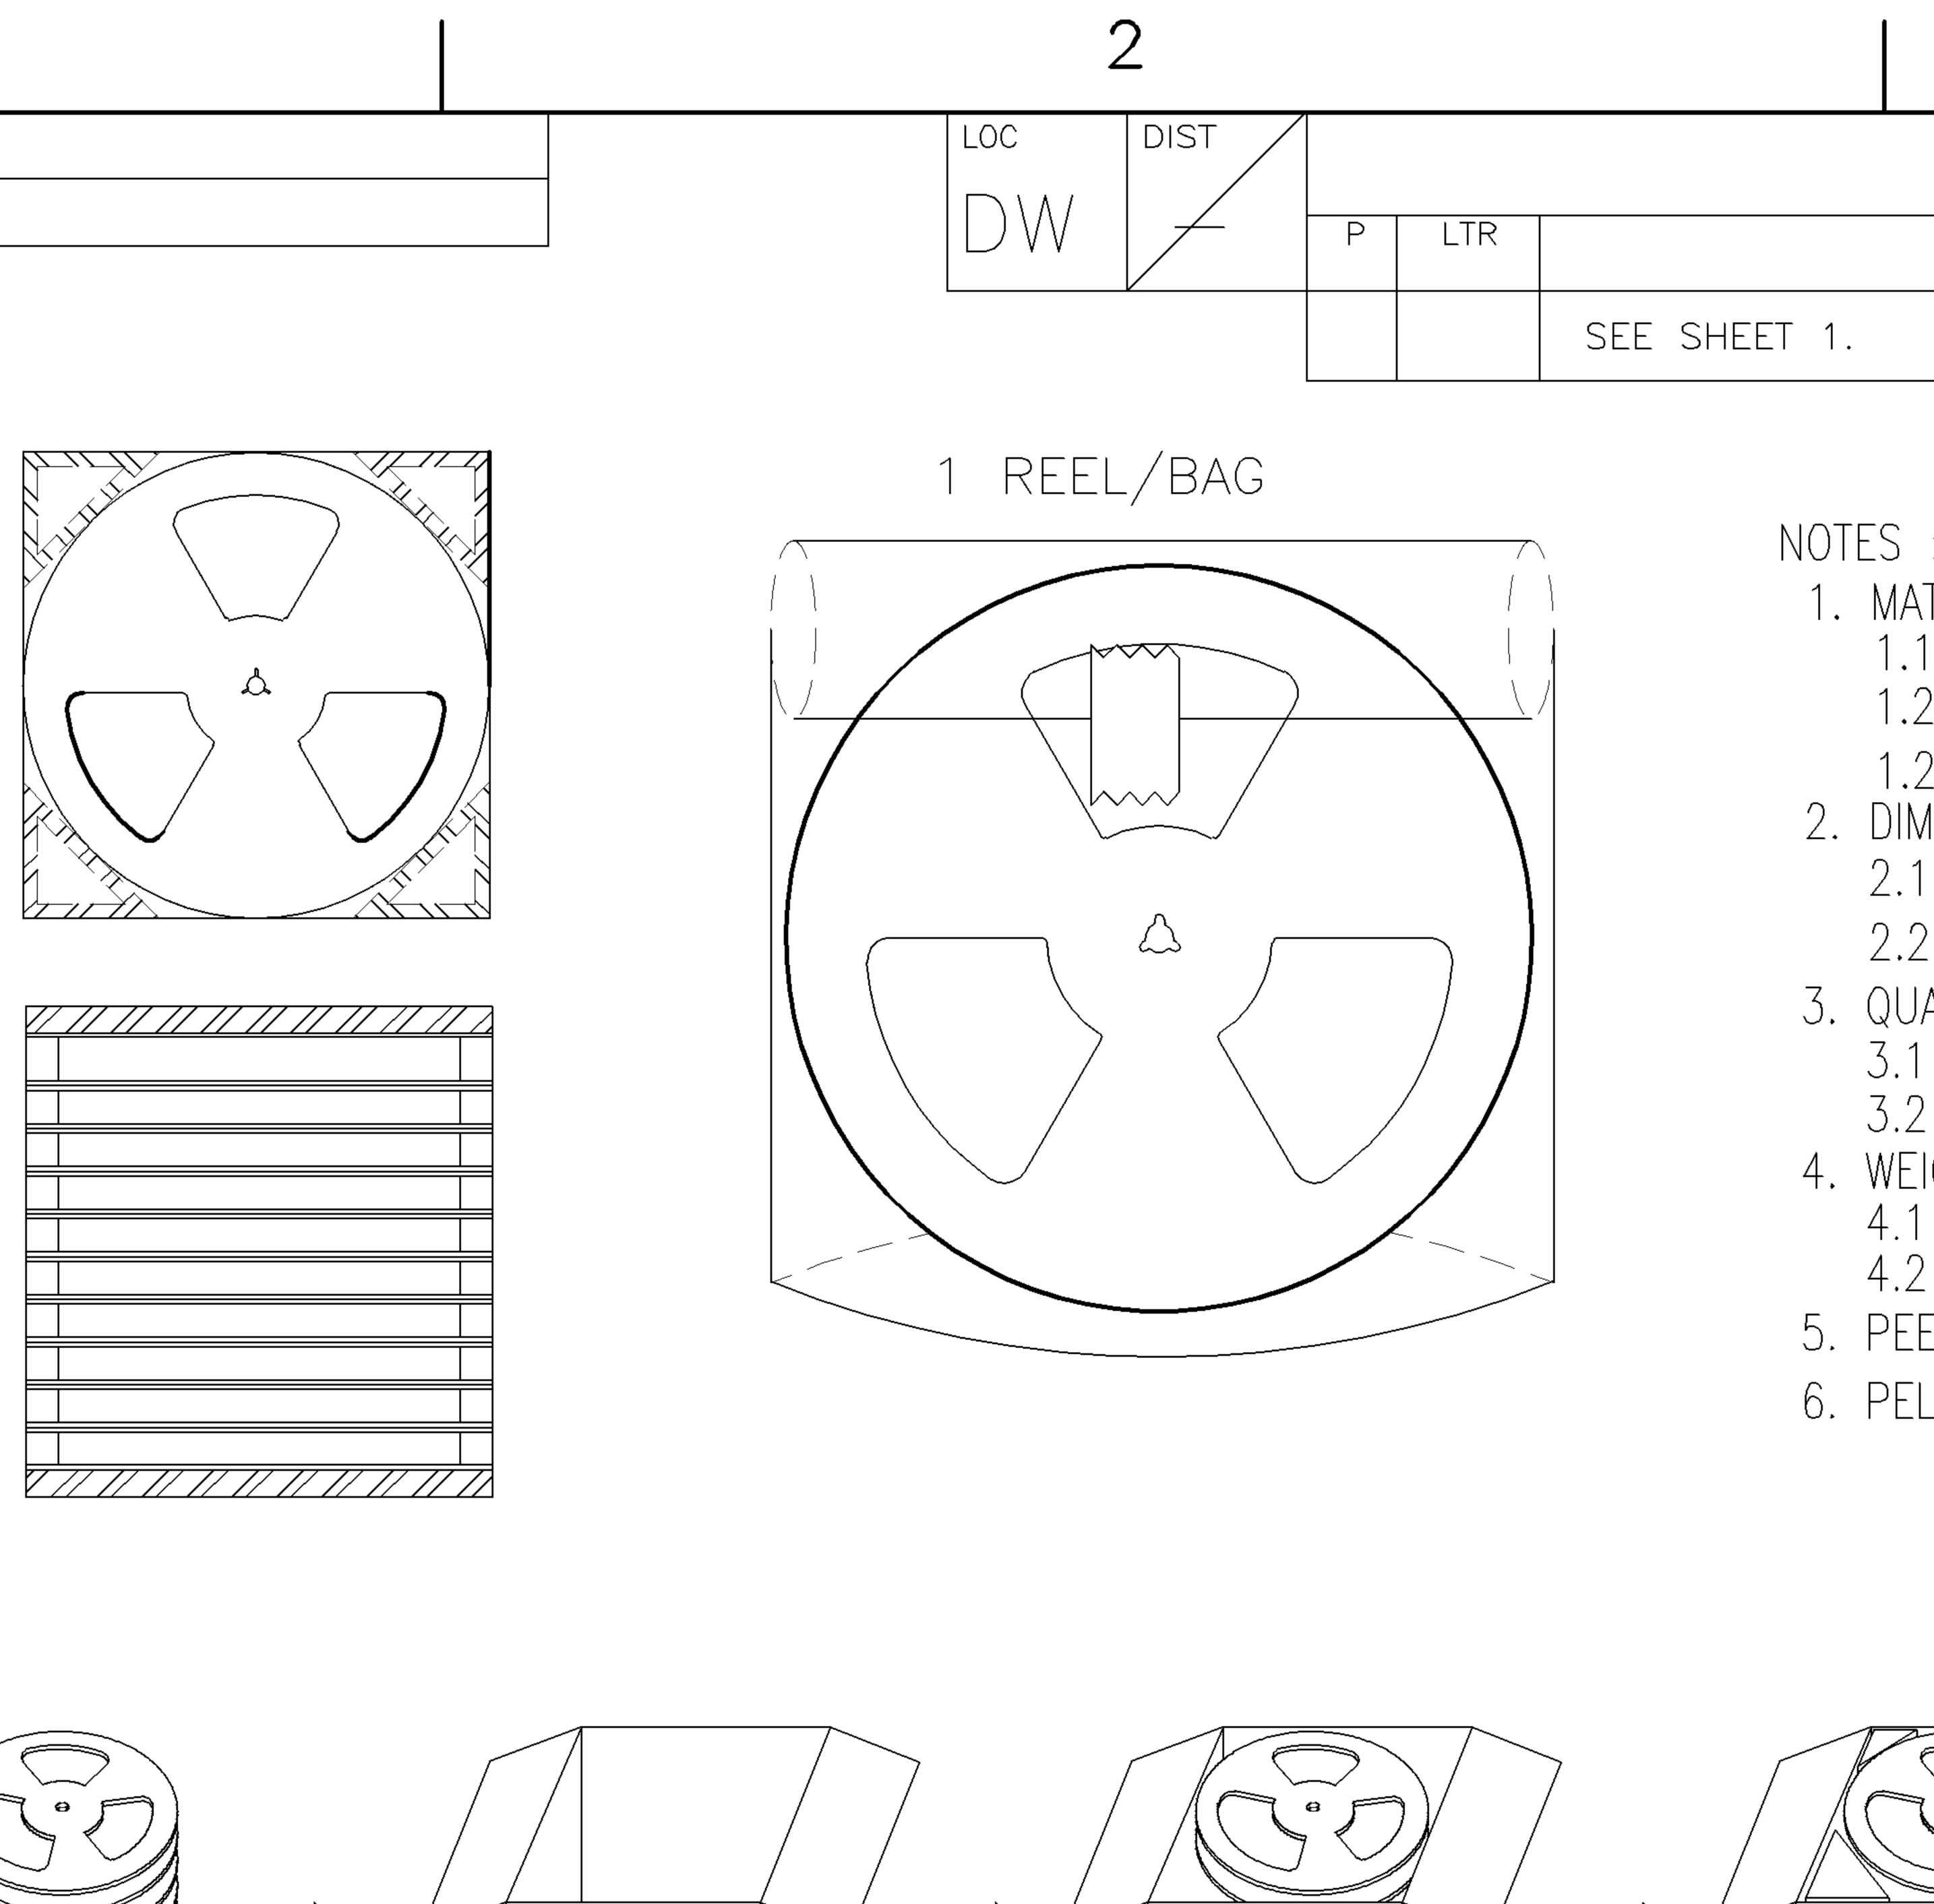

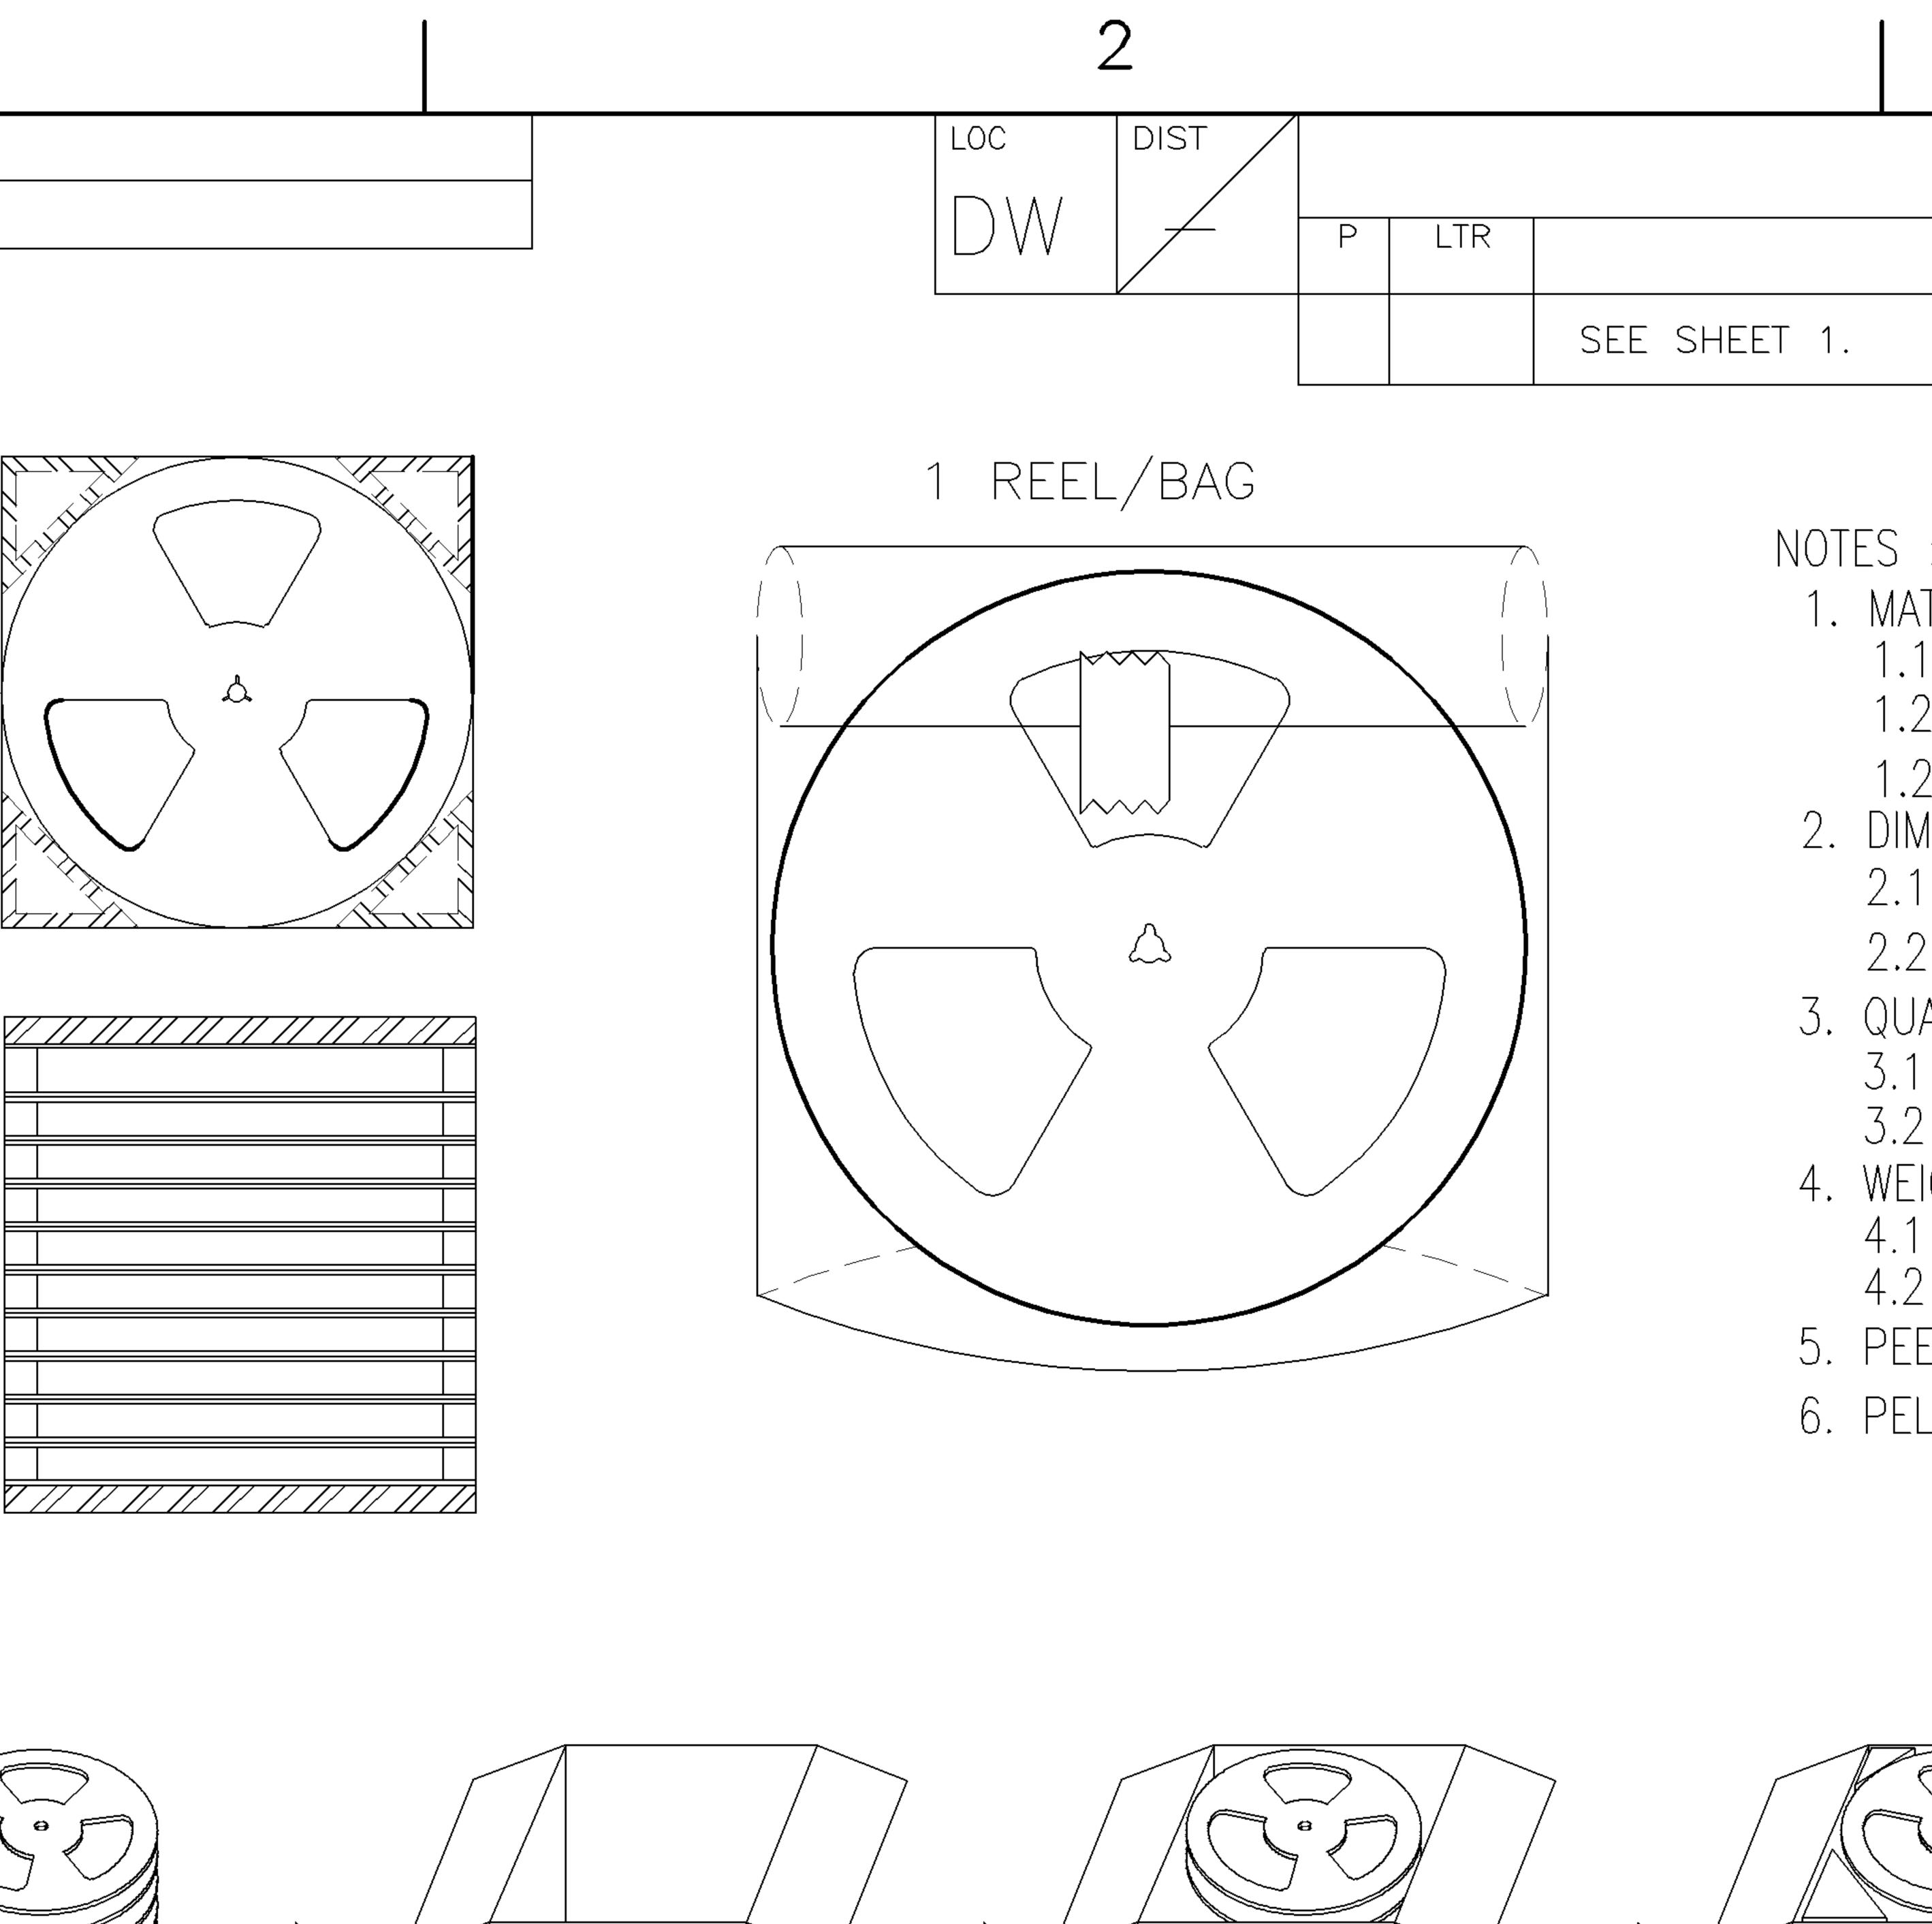

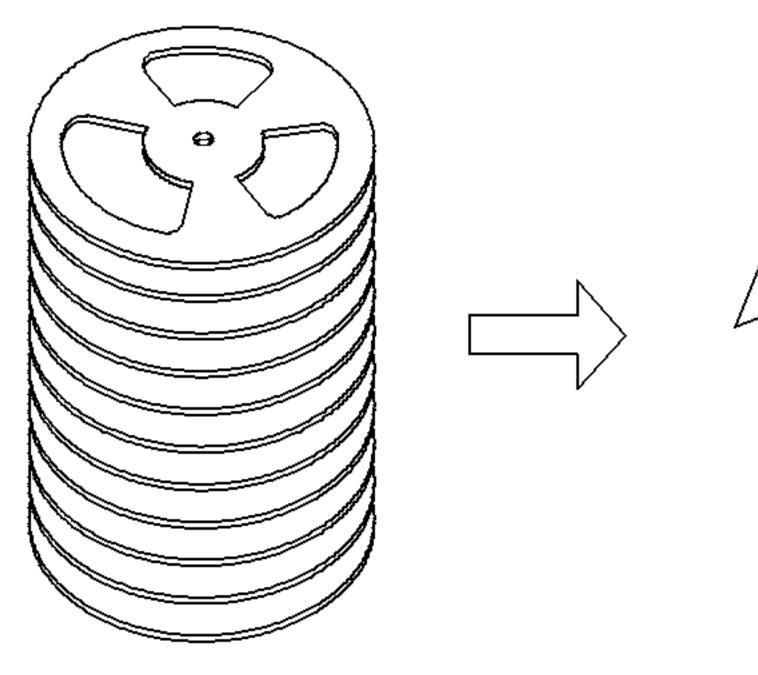

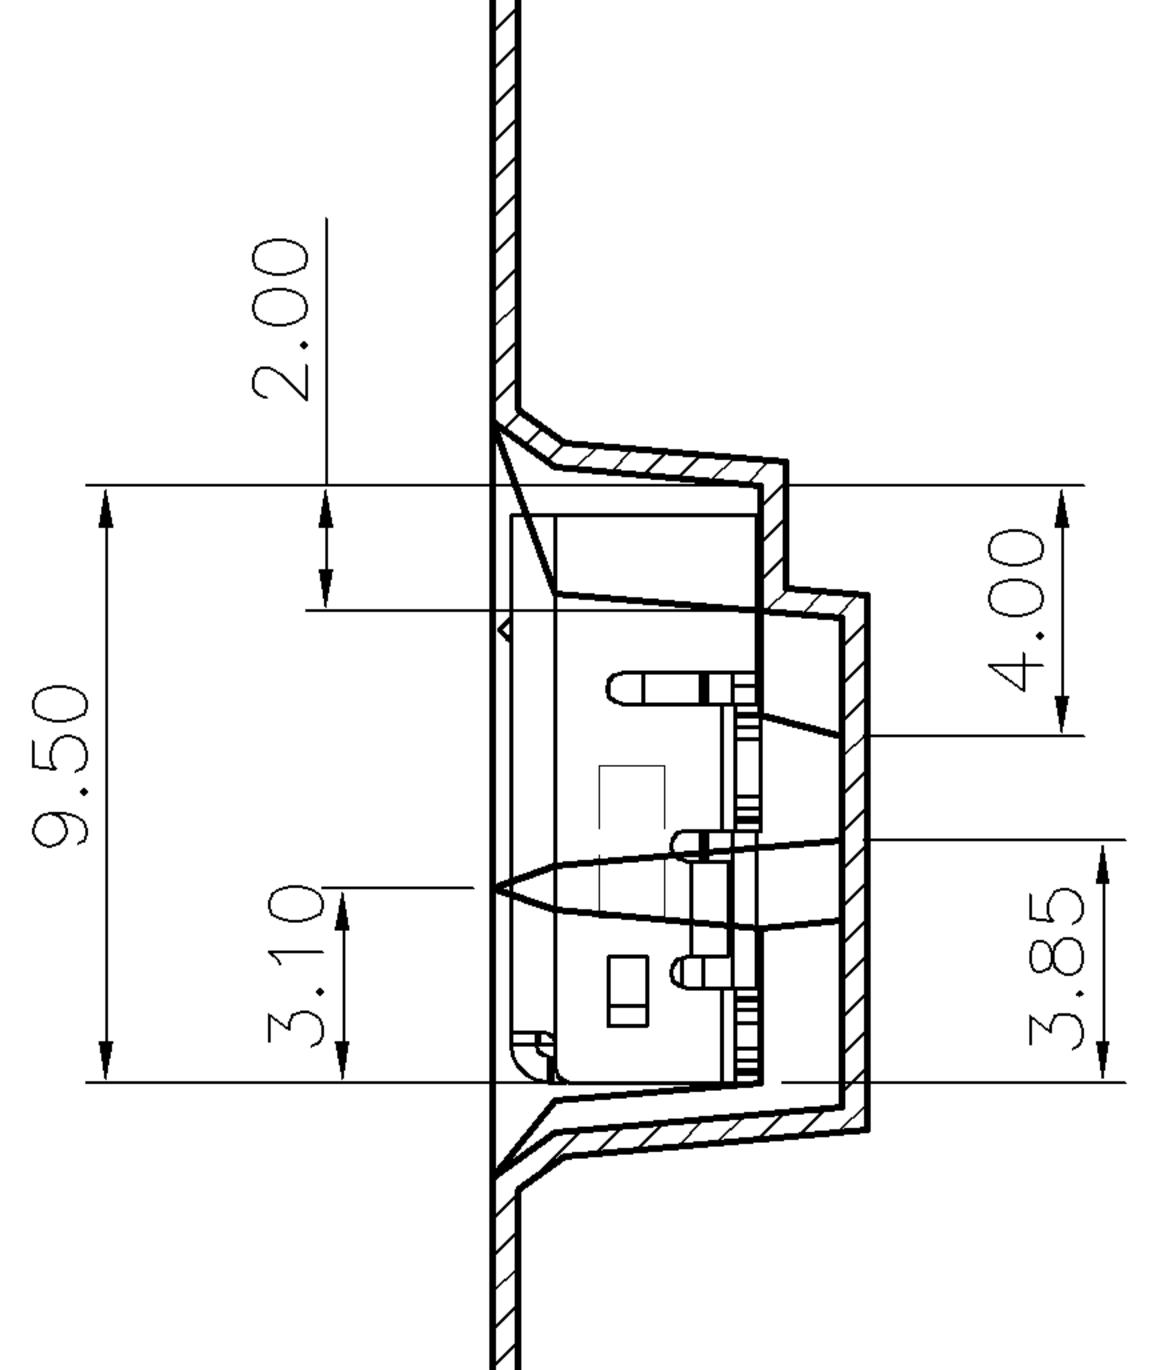

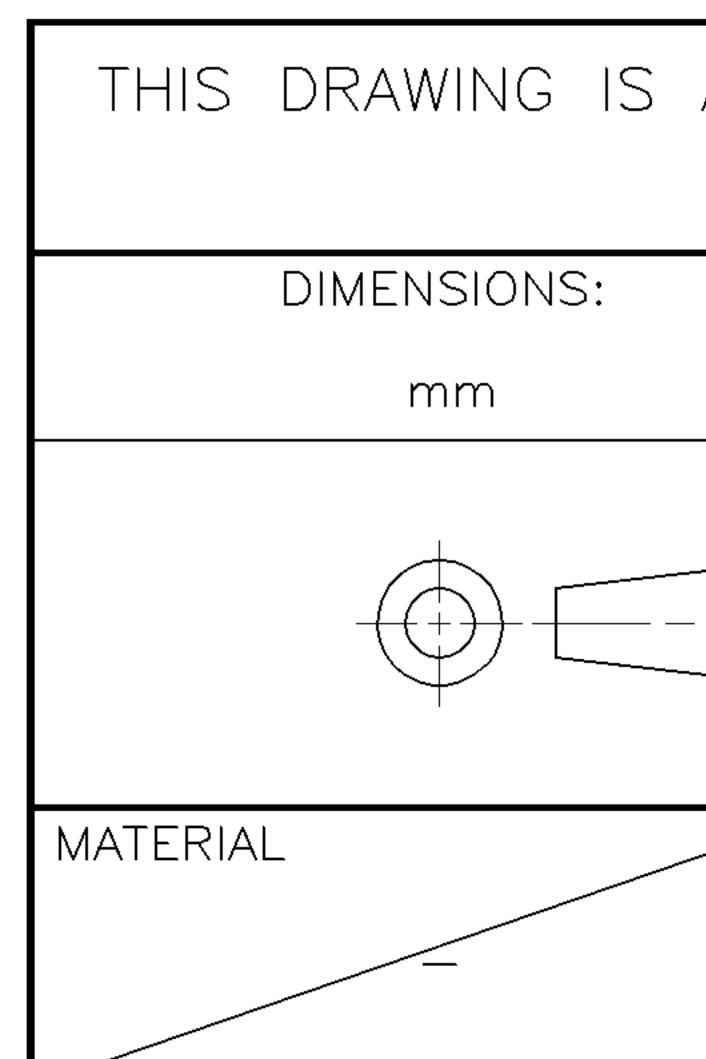

2	•	1				
	DIST	REVISIONS				
\vee	\square	P LTR DESCRIPTION	DATE	DWN	APVD	
		SEE SHEET 1.				
EEL,	/BAG					D
		NOTES :				
\	\sim	1. MATERAL : 1.1 EMBOSSED CARRIER: PS				
		1.2 COVER TAPE: PET				
	\sim	1.2 SHIPPING CARTON: CORRUGATED FIBE 2. DIMENSION :	R.			
		2. DIMENSION . 2.1 REEL: W=24 ,ØA=330				
	$ \land $		H=156.			
\mathbf{i}		3. QUANTITY : 3.1 PRIMARY PACKING: 700PCS/REEL.				
		3.2 SECONARY PACKING: 10REEL/ CARTON	N(7000PCS).			
, ,		4. WEIGHT :	ΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥΥ			
		4.1 NET WEIGHT: 11.5kg/CARTON. 4.2 GROSS WEIGHT: 10.5kg/CARTON.				
		5. PEELING RESISTANCE: 10g~130g.				
		6. PELLING SPEED: 300mm/minutes.				
						\sim
ſ	NE					C
- [$-/ \left[\right] - \left[\left[\right] - \left[\right] - \left[\right] - \left[\right] - \left[\left[\right] - \left[\right] - \left[\right] - \left[\right] - \left[\left[\right] - \left[\right] - \left[\right] - \left[\left[\right] - \left[\right] - \left[\right] - \left[\left[\right] - \left[\right] - \left[\right] - \left[\left[\right] - \left[\left[\right] - \left[\right] - \left[\left[\right] - \left[\left[\right] - \left[\left[\right] - \left[\right] - \left[\left[\left[\left[\left[\right] - \left[$				
	BOX F	ACKING DRAWING				
		USER FEED DIRECTION				
•	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ 	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ 				
	╺ ╺ ╺ ╺					В
	40	Ominimum				
Ι						
J⊥ I	DWN					
	CHK	TE Conne	ectivity			
	 APVD	- NAME				
,. _						
	PRODUCT	SPEC MINI USB CONN., R 5 POS, SMT, AB T				٨
	APPLICATIO		•••			
		SIZE CAGE CODE DRAWING NO		RESTRIC	TED TO	
	WEIGHT	A300779C-1775051				
		MER DRAWING	EET O OF (∕ <u>∧</u>	
			<u> </u>	_	H	

	2			
	DIST	REVISIONS		
	P LTR	DESCRIPTION	DATE DWN APVE)
	SEE SEE	SHEET 1.		
1 REEL	L/BAG	NOTES :		D
		1. MATERAL : 1.1 EMBOSSED CARRIER: PS		
)		1.2 COVER TAPE: PET 1.2 SHIPPING CARTON: CORRUGATED I	TIDED	
		2. DIMENSION : 2.1 REEL: W=24 ,ØA=330	IDLI	
	$ \land \qquad $	2.2 SHIPPING CARTON: $L=349.2, W=14$	7.6, H=156.	
		3. QUANTITY : 3.1 PRIMARY PACKING: 700PCS/REEL.		
		3.2 SECONARY PACKING: 10REÉL/ CAF 4. WEIGHT :	TON(7000PCS).	
		4.1 NET WEIGHT: 11.5kg/CARTON. 4.2 GROSS WEIGHT: 10.5kg/CARTON.		
		5. PEELING RESISTANCE: 10g~130g. 6. PELLING SPEED: 300mm/minutes.		
				C
	BOX PACKING DRAWING			
		USER FEED DIRECTION		
	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ 	} 	→ ◆	
				B
	400minimum	170Minimum		
	DWN			
S A CONTROLLED DOCUMENT.	CHK		nnectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	– NAME		
$\begin{array}{ccc} 0 & PLC & \pm - \\ 1 & PLC & \pm - \end{array}$	PRODUCT SPEC	MINI USB CONN., 5 POS, SMT, AB		Δ
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO		7
ANGLES ± - FINISH	WEIGHT	1000000000000000000000000000000000000		
	CUSTOMER DRAWING		SHEET 2 OF 2 REV A	