



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HC-B 16-ADP/1 DSUB 50

Order No.: 1775538

The illustration shows version HC-B 16-ADP/1 DSUB 37

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775538>

D-SUB adapter plate, for one D-SUB connector, no. of positions 50,
housing series HC-B 16...

Commercial data

GTIN (EAN)	 4 017918 038137
Note	Made-to-order
sales group	D032
Pack	2 pcs.
Customs tariff	85369010
Catalog page information	Page 544 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
06/01/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	For housing HC-B16
Length	85 mm
Height	34.5 mm
Hole diameter	3.2 mm
Material	PA
Inflammability class acc. to UL 94	HB

Color	gray
Number of positions	50
Design	B16
Drill hole distance, horizontal	77.5 mm
Drill hole distance, vertical	27 mm

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

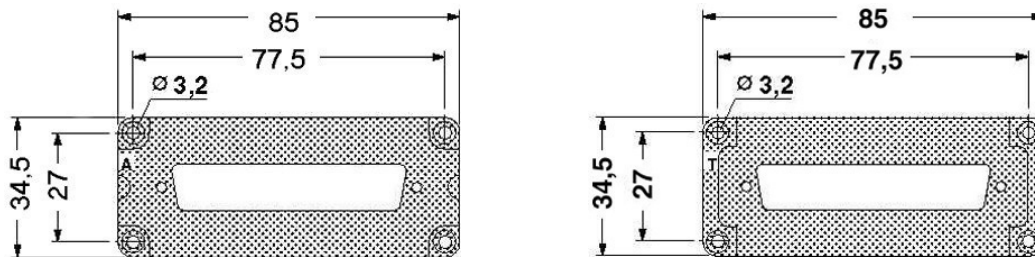

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;