



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HC-B 32-AMQ

Order No.: 1775693



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775693>

HEAVYCON panel mounting base B32, with double locking latch,
height 30 mm

Commercial data

EAN	4017918038267
Pack	10 pcs.
Customs tariff	85389099
Weight/Piece	0.2349 KG
Catalog page information	Page 505 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
02/17/2006



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General data

Note	For contact inserts HC-B32, DD144, M
Design	B32
Height	30 mm
Width	79 mm
Length	124 mm

Housing type	Panel mounting base, straight
Locking type	With double locking latch
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Locking latch material	Steel, galvanized
Material grip body interlock	PA-GF
Length of the assembly cutout	84 mm
Width of the assembly cutout	70 mm

Certificates / Approvals




Certification


GOST

Diagrams/Drawings

Dimensioned drawing

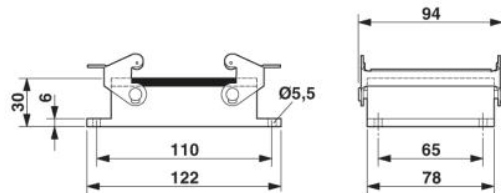

Dimensional drawing

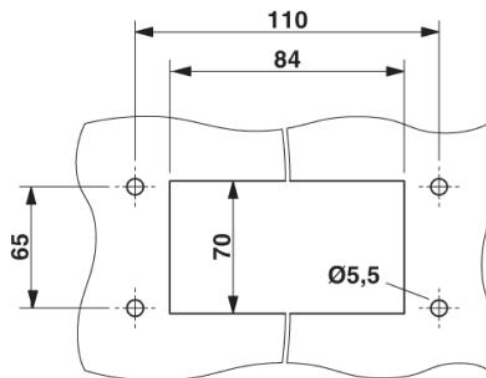

Panel cutout

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;