



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



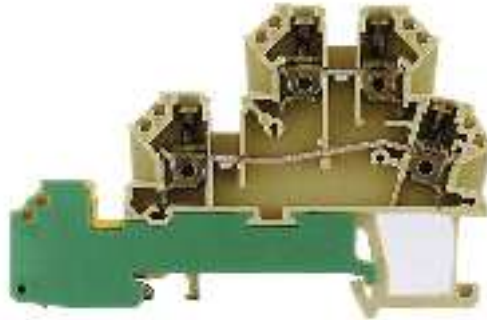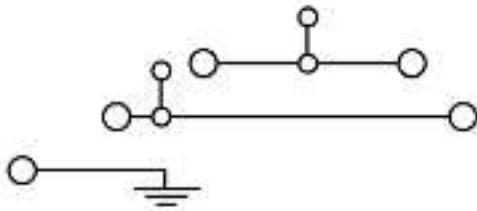

#### General ordering data

Order No.	1783790000
Part designation	DLD 2.5/PE DB
Version	Initiator/actuator terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
EAN	4032248212514
Qty.	50 pc(s).

#### Product notes

Note, technical data	Rated voltage is reduced to 30 V AC when one pole with a different potential is skipped with a cross-connector.
Product description	Time- and space-saving wiring for initiators and actuators. All the connections for initiator and actuator are in one terminal.
Note, accessories	Insulation plate TSCH 1 order No. 0319160000 (100 pcs) Partial end plate TEAP DLD2.5/PE DB order No. 1783810000 (20 pcs)

#### Additional technical data

Colour of insulating material	dark beige
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	No
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of levels	3
Open sides	right
Operating temperature range	- 60 °C, + 130 °C
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	PE terminal

#### CSA rating data

Voltage (CSA)	300 V
CSA current	10 A
Min. cross-section (CSA)	AWG 26
Max. cross-section (CSA)	AWG 12

#### Conductors for clamping (additional connection)

Type of connection	Screw connection
Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm <sup>2</sup>

#### Conductors for clamping (rated connection)

Clamping range, min.	0.13 mm <sup>2</sup>
Clamping range, max.	4 mm <sup>2</sup>
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
Stripping length	7 mm
Clamping screw	M 2.5
Blade size	0.6 x 3.5 mm
Tightening torque range	0.4...0.6 Nm
Gauge to IEC 60947-1	A3
Solid, min.	0.5 mm <sup>2</sup>
Solid, max.	4 mm <sup>2</sup>
Stranded, min.	0.5 mm <sup>2</sup>
Stranded, max.	4 mm <sup>2</sup>
Flexible, min.	0.5 mm <sup>2</sup>
Flexible, max.	4 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228/1)	2.5 mm <sup>2</sup>
AWG conductor size, min.	AWG 26
AWG conductor size, max.	AWG 12
AWG conductor size, min.	0.13 mm <sup>2</sup>
AWG conductor size, max.	3.31 mm <sup>2</sup>

#### Dimensions

Width	6.1 mm
Height of lowest version	49 mm
Length	74.5 mm
TS 35 offset	36.5 mm

#### Rating data

Rated cross-section	2.5 mm <sup>2</sup>
Rated voltage	250 V
Rated impulse voltage	4 kV
Rated current	17.5 A
Standards	IEC 60947-7-1
Current with max. conductor	17.5 A
Pollution severity	3

#### UL rating data

Voltage (UL)	300 V
Current (UL)	10 A
Min. cross-section (UL)	AWG 26
Max. cross-section (UL)	AWG 12

#### Approvals

Approvals institutes



#### Classifications

ETIM 2.0	EC000900
ETIM 3.0	EC000900
eClass 4.1	27-14-11-28
eClass 5.0	27-14-11-28
eClass 5.1	27-14-11-28

#### Similar products

Order No.	Part designation	Version
1784180000	DLD 2.5 DB	Initiator/actuator terminal, 2.5 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35