



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



I-Series
IIK 1.5N 4L PA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

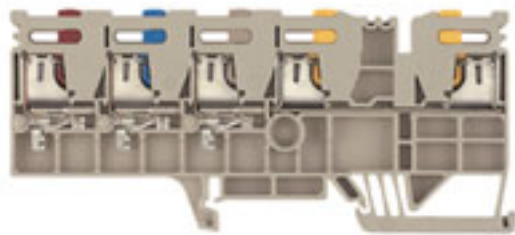

The modular initiator/actuator system with integral cross-connection and advanced IDC technology.

Each single terminal has two (or three in the case of separate PE function) clamping points for the voltage supply. These are fed via a supply terminal and the internal cross-connections. Two further clamping points serve as a feed-through terminal for relaying the signal.

General ordering data

Order No.	1801900000
Type	IIK 1.5N 4L PA
Version	I-Series, Initiator/actuator terminal, Rated cross-section: 1.5 mm ² , Insulation displacement connection
GTIN (EAN)	4032248387595
Qty.	50 pc(s).

I-Series
IIK 1.5N 4L PA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Length	113 mm	Width	5.1 mm
Height	50 mm	Height of lowest version	51 mm
Net weight	20.78 g		

Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

Additional technical data

Explosion-tested version	No	Open sides	right
Type of mounting	Snap-on	Version	Supply terminal

Clampable wires (rated connection)

Type of connection	Insulation displacement connection	Blade size	0.6 x 3.5 mm
Connection direction	top	Clamping range, rated connection, min.	0.21 mm ²
Clamping range, rated connection, max.	1.5 mm ²	Wire connection cross section, solid core, max. rated connection	0.21 mm ²
Wire connection cross section, solid core max. rated connection	1.5 mm ²	Wire connection cross section, finely stranded, max.	1.5 mm ²
Wire connection cross-section, finely stranded, min.	0.21 mm ²	Finely stranded, min. (rated connection)	0.25 mm ²
Finely stranded, max. (rated connection)	0.34 mm ²	Wire connection cross section AWG, min.	AWG 24
Wire connection cross section AWG, max.	AWG 16		

Rated data

Rated cross-section	1.5 mm ²	Rated voltage	250 V
Rated impulse withstand voltage	4 kV	Rated current	17.5 A
Standards	IEC 60352-4, IEC 60947-7-1	Pollution severity	3

UL ratings data

Certificate No. (cURus)	E60693VOL1SEC61	Conductor size Factory wiring max. (cURus)	16 AWG
Conductor size Factory wiring min. (cURus)	24 AWG	Conductor size Field wiring max. (cURus)	16 AWG
Conductor size Field wiring min. (cURus)	24 AWG	Current size B (cURus)	10 A
Current size C (cURus)	10 A	Current size D (cURus)	10 A
Voltage size B (cURus)	300 V	Voltage size C (cURus)	300 V
Voltage size D (cURus)	300 V	Wire cross section max. (cURus)	12 AWG

Material data

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

I-Series IIK 1.5N 4L PA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

System specifications

Product family	I-Series	Type of connection	Insulation displacement connection
Connection direction	top	Number of levels	1
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	Yes		

Classifications

ETIM 2.0	EC000900	ETIM 3.0	EC000900
UNSPSC	30-21-18-11	eClass 4.1	27-14-11-28
eClass 5.1	27-14-11-28	eClass 6.2	27-14-11-28
eClass 7.1	27-14-11-28		

Product information

Descriptive text technical data	Conductor < 0.5 mm ² / AWG 24 with IRH 1.5
---------------------------------	---

Approvals

Approvals



ROHS	Conform
------	---------

I-Series
IIK 1.5N 4L PA

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

