



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



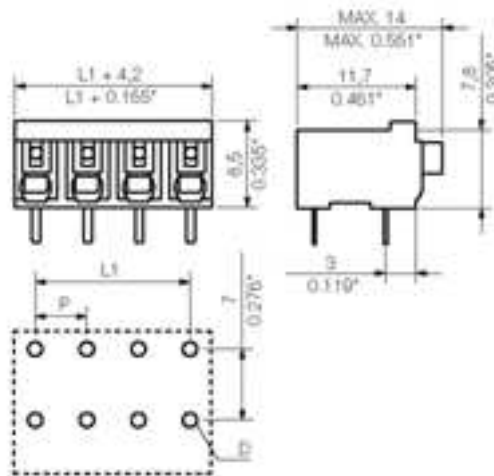

General ordering data

Order No.	1824770000
Part designation	LSF-SMT5.00/5/90 3.5 SW
Version	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 5, 90°, Tube
EAN	4032248327324
Qty.	22 pc(s).

System parameters

Product family	System LS
Conductor connection system	Push In
Fitted to PCB	Reflow solder connection
Outgoing direction of conductor	90°
Pitch	5 mm
Pitch in inch	0.197 inch
No. of poles	5
Fitted by customer	yes
No. of rows	1
Solder pin length	3.5 mm
Dia. of fitting hole	1.1 mm
Fitting hole tolerance	+ 0.1 mm
No. of solder pins per pole	2
Stripping length	8 mm

System parameters

L1 in mm	20 mm
L1 in inch	0.787 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

Material data

Insulating material	LCP GF
Colour	black
colour chart	Similar to RAL 9011
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 175
Contact base material	Copper alloy
Contact surface	tinned
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C

Connectable conductors

Clamping range, min.	0.13 mm ²
Clamping range, max.	1.5 mm ²
AWG, min.	24
AWG, max.	16
O.D. of conductor insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.2 mm ²
Solid, max. H05(07) V-U	1.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²
With wire end ferrule, acc. to DIN 46 228/1, min.	0.25 mm ²
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.25 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, max.	0.75 mm ²

DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	17.5 A
Rated current, max. No. pins (Tu=20°C)	17.5 A
Rated current, min. No. pins (Tu=40°C)	17.5 A
Rated current, max. No. pins (Tu=40°C)	15 A
Rated voltage for overvoltage class/pollution severity II/2	500 V
Rated voltage for overvoltage class/pollution severity III/2	320 V
Rated voltage for overvoltage class/pollution severity III/3	250 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	4 kV
Short-time withstand current resistance	3 x 1s with 80 A

CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	24
AWG conductor (field wiring), max.	16

UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	24
AWG conductor, max.	16

Approvals

Approvals institutes



Classifications

eClass 4.1	NK
eClass 5.0	NK
eClass 5.1	NK

Similar products

Order No.	Part designation	Version
1824740000	LSF-SMT5.00/2/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 2, 90°, Tube
1876430000	LSF-SMT5.00/2/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 2, 90°, Tape
1869600000	LSF-SMT 5.00/2/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 2, 90°, Tube
1876240000	LSF-SMT5.00/2/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 2, 90°, Tape
1824750000	LSF-SMT5.00/3/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 3, 90°, Tube
1876510000	LSF-SMT5.00/3/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 3, 90°, Tape
1869610000	LSF-SMT 5.00/3/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 3, 90°, Tube
1876260000	LSF-SMT5.00/3/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 3, 90°, Tape
1824760000	LSF-SMT5.00/4/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 4, 90°, Tube

1876530000	LSF-SMT5.00/4/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 4, 90°, Tape
1869620000	LSF-SMT 5.00/4/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 4, 90°, Tube
1876270000	LSF-SMT5.00/4/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 4, 90°, Tape
1876550000	LSF-SMT5.00/5/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 5, 90°, Tape
1869630000	LSF-SMT 5.00/5/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 5, 90°, Tube
1876280000	LSF-SMT5.00/5/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 5, 90°, Tape
1824780000	LSF-SMT5.00/6/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 6, 90°, Tube
1876560000	LSF-SMT5.00/6/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 6, 90°, Tape
1869640000	LSF-SMT 5.00/6/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 6, 90°, Tube
1876300000	LSF-SMT5.00/6/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 6, 90°, Tape
1824790000	LSF-SMT5.00/7/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 7, 90°, Tube
1876540000	LSF-SMT5.00/7/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 7, 90°, Tape
1869650000	LSF-SMT 5.00/7/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 7, 90°, Tube
1876330000	LSF-SMT5.00/7/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 7, 90°, Tape
1824800000	LSF-SMT5.00/8/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 8, 90°, Tube
1876520000	LSF-SMT5.00/8/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 8, 90°, Tape
1869660000	LSF-SMT 5.00/8/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 8, 90°, Tube
1876350000	LSF-SMT5.00/8/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 5.00 mm, No. of poles: 8, 90°, Tape