



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



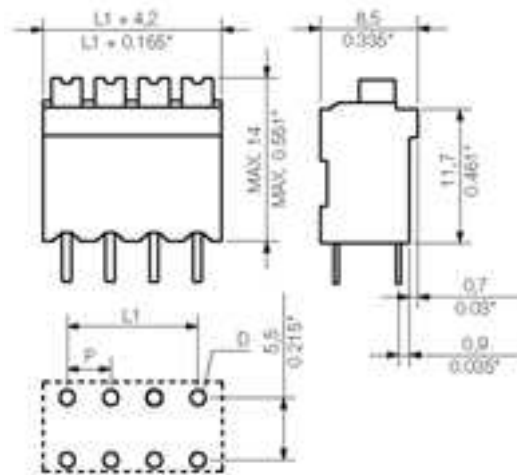

General ordering data

Order No.	1825890000
Part designation	LSF-SMT3.81/11/180 3.5 SW
Version	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 11, 180°, Tube
EAN	4032248328604
Qty.	13 pc(s).

System parameters

Product family	System LS
Conductor connection system	Push In
Fitted to PCB	Reflow solder connection
Outgoing direction of conductor	180°
Pitch	3.81 mm
Pitch in inch	0.15 inch
No. of poles	11
Fitted by customer	no
No. of rows	1
Solder pin length	3.5 mm
Dia. of fitting hole	1.1 mm
Fitting hole tolerance	+ 0.1 mm
No. of solder pins per pole	2
Stripping length	8 mm

System parameters

L1 in mm	38.1 mm
L1 in inch	1.5 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

Material data

Insulating material	LCP GF
Colour	black
colour chart	Similar to RAL 9011
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 175
Contact base material	Copper alloy
Contact surface	tinned
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C

Connectable conductors

Clamping range, min.	0.13 mm ²
Clamping range, max.	1.5 mm ²
AWG, min.	24
AWG, max.	16
O.D. of conductor insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.2 mm ²
Solid, max. H05(07) V-U	1.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²
With wire end ferrule, acc. to DIN 46 228/1, min.	0.25 mm ²
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.25 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, max.	0.75 mm ²

DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	17.5 A
Rated current, max. No. pins (Tu=20°C)	16 A
Rated current, min. No. pins (Tu=40°C)	17.5 A
Rated current, max. No. pins (Tu=40°C)	14 A
Rated voltage for overvoltage class/pollution severity II/2	320 V
Rated voltage for overvoltage class/pollution severity III/2	160 V
Rated voltage for overvoltage class/pollution severity III/3	160 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	2.5 kV
Short-time withstand current resistance	3 x 1s with 80 A

CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	24
AWG conductor (field wiring), max.	16

UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	24
AWG conductor, max.	16

Approvals

Approvals institutes



Classifications

eClass 4.1	NK
eClass 5.0	NK
eClass 5.1	NK

Similar products

Order No.	Part designation	Version
1825790000	LSF-SMT3.81/2/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 2, 180°, Tube
1875550000	LSF-SMT3.81/2/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 2, 180°, Tape
1869890000	LSF-SMT 3.81/2/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 2, 180°, Tube
1875320000	LSF-SMT3.81/2/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 2, 180°, Tape
1825800000	LSF-SMT3.81/3/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 3, 180°, Tube
1875570000	LSF-SMT3.81/3/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 3, 180°, Tape
1869900000	LSF-SMT 3.81/3/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 3, 180°, Tube
1875330000	LSF-SMT3.81/3/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 3, 180°, Tape
1825810000	LSF-SMT3.81/4/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 4, 180°, Tube

1875590000	LSF-SMT3.81/4/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 4, 180°, Tape
1869910000	LSF-SMT 3.81/4/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 4, 180°, Tube
1875340000	LSF-SMT3.81/4/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 4, 180°, Tape
1825820000	LSF-SMT3.81/5/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 5, 180°, Tube
1875650000	LSF-SMT3.81/5/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 5, 180°, Tape
1869920000	LSF-SMT 3.81/5/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 5, 180°, Tube
1875350000	LSF-SMT3.81/5/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 5, 180°, Tape
1825830000	LSF-SMT3.81/6/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 6, 180°, Tube
1875670000	LSF-SMT3.81/6/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 6, 180°, Tape
1869930000	LSF-SMT 3.81/6/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 6, 180°, Tube
1875360000	LSF-SMT3.81/6/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 6, 180°, Tape
1825840000	LSF-SMT3.81/7/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 7, 180°, Tube
1875680000	LSF-SMT3.81/7/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 7, 180°, Tape
1869940000	LSF-SMT 3.81/7/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 7, 180°, Tube
1875370000	LSF-SMT3.81/7/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 7, 180°, Tape
1825850000	LSF-SMT3.81/8/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 8, 180°, Tube
1875710000	LSF-SMT3.81/8/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 8, 180°, Tape
1869950000	LSF-SMT 3.81/8/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 8, 180°, Tube
1875380000	LSF-SMT3.81/8/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 8, 180°, Tape
1825870000	LSF-SMT3.81/9/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 9, 180°, Tube
1875730000	LSF-SMT3.81/9/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 9, 180°, Tape
1869960000	LSF-SMT 3.81/9/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 9, 180°, Tube
1875390000	LSF-SMT3.81/9/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 9, 180°, Tape
1825880000	LSF-SMT3.81/10/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 10, 180°, Tube
1875760000	LSF-SMT3.81/10/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 10, 180°, Tape
1869970000	LSF-SMT 3.81/10/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 10, 180°, Tube

1875400000	LSF-SMT3.81/10/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 10, 180°, Tape
1875810000	LSF-SMT3.81/11/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 11, 180°, Tape
1870000000	LSF-SMT 3.81/11/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 11, 180°, Tube
1875410000	LSF-SMT3.81/11/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 11, 180°, Tape
1825920000	LSF-SMT3.81/12/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 12, 180°, Tube
1870010000	LSF-SMT 3.81/12/180 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 12, 180°, Tube
1870900000	LSF-SMT 3.81/13/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 13, 180°, Tube
1870020000	LSF-SMT 3.81/13/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 13, 180°, Tube
1870910000	LSF-SMT 3.81/14/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 14, 180°, Tube
1870030000	LSF-SMT 3.81/14/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 14, 180°, Tube
1870920000	LSF-SMT 3.81/15/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 15, 180°, Tube
1870040000	LSF-SMT 3.81/15/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 15, 180°, Tube
1870930000	LSF-SMT 3.81/16/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 16, 180°, Tube
1870050000	LSF-SMT 3.81/16/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 16, 180°, Tube
1870940000	LSF-SMT 3.81/17/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 17, 180°, Tube
1870060000	LSF-SMT 3.81/17/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 17, 180°, Tube
1870950000	LSF-SMT 3.81/18/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 18, 180°, Tube
1870070000	LSF-SMT 3.81/18/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 18, 180°, Tube
1870960000	LSF-SMT 3.81/19/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 19, 180°, Tube
1870080000	LSF-SMT 3.81/19/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 19, 180°, Tube
1870970000	LSF-SMT 3.81/20/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 20, 180°, Tube
1870090000	LSF-SMT 3.81/20/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 20, 180°, Tube
1870980000	LSF-SMT 3.81/21/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 21, 180°, Tube
1870100000	LSF-SMT 3.81/21/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 21, 180°, Tube
1870990000	LSF-SMT 3.81/22/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 22, 180°, Tube
1870110000	LSF-SMT 3.81/22/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 22, 180°, Tube

1871000000	LSF-SMT 3.81/23/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 23, 180°, Tube
1870120000	LSF-SMT 3.81/23/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 23, 180°, Tube
1871010000	LSF-SMT 3.81/24/180 3.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 24, 180°, Tube
1870130000	LSF-SMT 3.81/24/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.81 mm, No. of poles: 24, 180°, Tube