



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



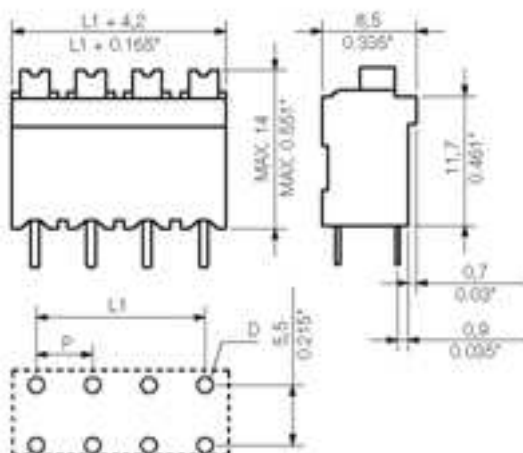

#### General ordering data

Order No.	1826060000
Part designation	LSF-SMT5.08/3/180 3.5 SW
Version	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 3, 180°, Tube
EAN	4032248328772
Qty.	38 pc(s).

#### System parameters

Product family	System LS
Conductor connection system	Push In
Fitted to PCB	Reflow solder connection
Outgoing direction of conductor	180°
Pitch	5.08 mm
Pitch in inch	0.2 inch
No. of poles	3
Fitted by customer	yes
No. of rows	1
Solder pin length	3.5 mm
Dia. of fitting hole	1.1 mm
Fitting hole tolerance	+ 0.1 mm
No. of solder pins per pole	2
Stripping length	8 mm

#### System parameters

L1 in mm	10.16 mm
L1 in inch	0.4 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

#### Material data

Insulating material	LCP GF
Colour	black
colour chart	Similar to RAL 9011
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 175
Contact base material	Copper alloy
Contact surface	tinned
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C

#### Connectable conductors

Clamping range, min.	0.13 mm <sup>2</sup>
Clamping range, max.	1.5 mm <sup>2</sup>
AWG, min.	24
AWG, max.	16
O.D. of conductor insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.2 mm <sup>2</sup>
Solid, max. H05(07) V-U	1.5 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.2 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, min.	0.25 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.25 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, max.	0.75 mm <sup>2</sup>

#### DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	17.5 A
Rated current, max. No. pins (Tu=20°C)	17.5 A
Rated current, min. No. pins (Tu=40°C)	17.5 A
Rated current, max. No. pins (Tu=40°C)	15 A
Rated voltage for overvoltage class/pollution severity II/2	500 V
Rated voltage for overvoltage class/pollution severity III/2	320 V
Rated voltage for overvoltage class/pollution severity III/3	250 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	4 kV
Short-time withstand current resistance	3 x 1s with 80 A



#### CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	24
AWG conductor (field wiring), max.	16

#### UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	24
AWG conductor, max.	16

#### Approvals

Approvals institutes



#### Classifications

eClass 4.1	NK
eClass 5.0	NK
eClass 5.1	NK

#### Similar products

Order No.	Part designation	Version
1826040000	LSF-SMT5.08/2/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 2, 180°, Tube
1876490000	LSF-SMT5.08/2/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 2, 180°, Tape
1870210000	LSF-SMT 5.08/2/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 2, 180°, Tube
1876500000	LSF-SMT5.08/2/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 2, 180°, Tape
1876450000	LSF-SMT5.08/3/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 3, 180°, Tape
1870220000	LSF-SMT 5.08/3/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 3, 180°, Tube
1876460000	LSF-SMT5.08/3/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 3, 180°, Tape
1826070000	LSF-SMT5.08/4/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 4, 180°, Tube
1876360000	LSF-SMT5.08/4/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 4, 180°, Tape

1870230000	LSF-SMT 5.08/4/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 4, 180°, Tube
1876410000	LSF-SMT5.08/4/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 4, 180°, Tape
1826080000	LSF-SMT5.08/5/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 5, 180°, Tube
1876250000	LSF-SMT5.08/5/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 5, 180°, Tape
1870240000	LSF-SMT 5.08/5/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 5, 180°, Tube
1876290000	LSF-SMT5.08/5/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 5, 180°, Tape
1826100000	LSF-SMT5.08/6/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 6, 180°, Tube
1876170000	LSF-SMT5.08/6/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 6, 180°, Tape
1870250000	LSF-SMT 5.08/6/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 6, 180°, Tube
1876180000	LSF-SMT5.08/6/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 6, 180°, Tape
1826110000	LSF-SMT5.08/7/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 7, 180°, Tube
1875750000	LSF-SMT5.08/7/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 7, 180°, Tape
1870260000	LSF-SMT 5.08/7/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 7, 180°, Tube
1876100000	LSF-SMT5.08/7/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 7, 180°, Tape
1826120000	LSF-SMT5.08/8/180 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 8, 180°, Tube
1875580000	LSF-SMT5.08/8/180 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 8, 180°, Tape
1870270000	LSF-SMT 5.08/8/180 1.5	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 8, 180°, Tube
1875610000	LSF-SMT5.08/8/180 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 8, 180°, Tape