



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-. - .

LOC

DIST

REVISIONS

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

E

B

P

LTR

DESCRIPTION

DATE

DWN

APVD

C1

REVISED PER ECO-11-005150

21MAR11




RK

HMR

NOTES:

- 1. ELECTRICAL DATA: CONTACT RESISTANCE: 10 mOhm MAX
INSULATION RESISTANCE: 100 MOhm MIN at 500VDC
CURRENT RATING: 5 AMPS
BREAKDOWN VOLTAGE: 500 VAC MIN PER MINUTE
- 2. ENVIRONMENTAL: OPERATING TEMPERATURE: -20°C TO +80°C
SEALING REQUIREMENTS: IP67
- 3. PROD SPEC: 108-3641
- 4. PACKAGING: 107-3334
- 5. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
- 6. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

| ITEM | DESCRIPTION | MATERIAL | FINISH/COLOUR | QTY |
|------|--------------------------------------|-------------------------|--------------------------------|-----|
| 1 | SCREW NUT | ZINC DIE CAST | 2.5µm NICKEL PLATED | 1 |
| 2 | CONNECTOR BODY | POLYURETHANE | BLACK | 1 |
| 3 | SOCKET CONTACT | BRASS | 0.15µm GOLD PLATED OVER NICKEL | 5 |
| 4 | 5 CORE CABLE (CORES 22AWG TO UL2464) | PVC JACKET UV RESISTANT | BLACK | 1 |
| 5 | 'O' RING | VITON | GREEN | 1 |

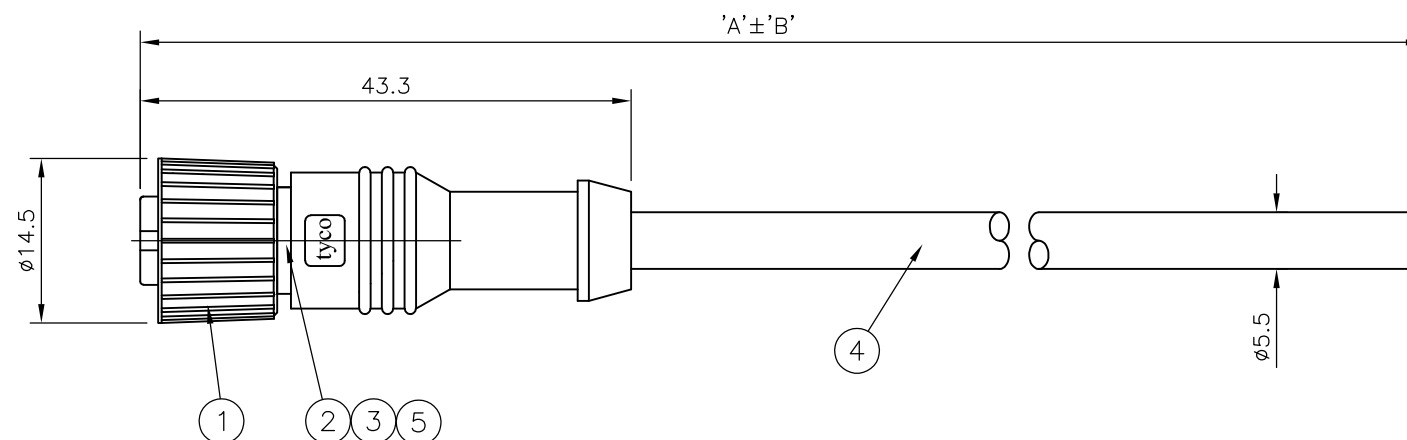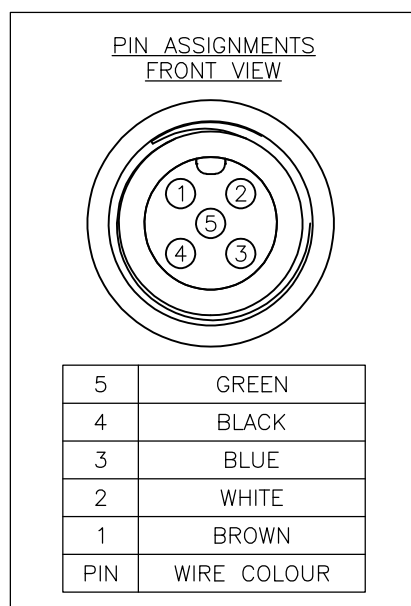

| | | | |
|-------|---------|---|-------------|
| 500 | 40 mm | M12 STRAIGHT FEMALE CONNECTOR 0.5m CABLE | 1-1838246-1 |
| 10000 | 500 mm | M12 STRAIGHT FEMALE CONNECTOR 10.0m CABLE | 1838246-5 |
| 7000 | 350 mm | M12 STRAIGHT FEMALE CONNECTOR 7.0m CABLE | 1838246-4 |
| 5000 | 250 mm | M12 STRAIGHT FEMALE CONNECTOR 5.0m CABLE | 1838246-3 |
| 3000 | 150 mm | M12 STRAIGHT FEMALE CONNECTOR 3.0m CABLE | 1838246-2 |
| 2000 | 100 mm | M12 STRAIGHT FEMALE CONNECTOR 2.0m CABLE | 1838246-1 |
| DIM A | TOL 'B' | DESCRIPTION | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

| | |
|--------|-----|
| 0 PLC | ± - |
| 1 PLC | ± - |
| 2 PLC | ± - |
| 3 PLC | ± - |
| 4 PLC | ± - |
| ANGLES | ± - |
| FINISH | ± - |

MATERIAL: -

DWN: 22AUG05 H M RAGHAVENDRA
CHK: 15DEC05 F.WHEELER-KING
APVD: 15DEC05 F.WHEELER-KING

PRODUCT SPEC: -
APPLICATION SPEC: -
WEIGHT: -

STE TE Connectivity

NAME: M12 STRAIGHT FEMALE CONNECTOR 5 POSITION, PVC CABLE

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-1838246 RESTRICTED TO: -

CUSTOMER DRAWING SCALE: NTS SHEET: 1 OF 1 REV: C1