



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




SERIES

1840R
1840



Molded Unshielded RF Coils

Actual Size

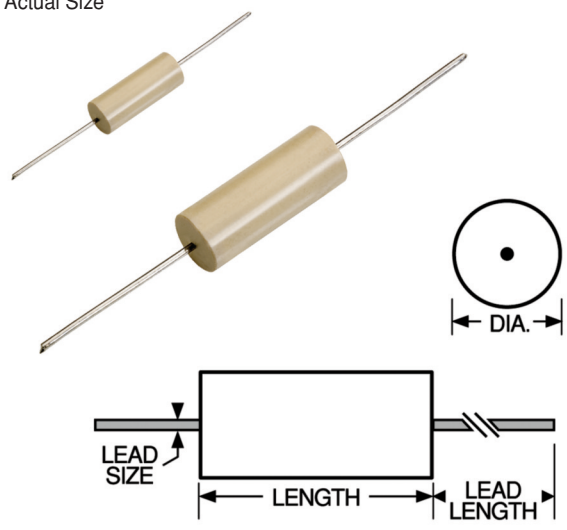

Military Specifications

MS75008 (LT4K); MS75101 (LT10K)

Physical Parameters

	Inches	Millimeters
Length	0.437 ± 0.010	11.10 ± 0.25
Diameter	0.187 ± 0.010	4.75 ± 0.25
Lead Size		
AWG #22 TCW	0.025 ± 0.002	0.635 ± 0.051
Lead Length	1.44 ± 0.12	36.58 ± 3.05

Current Rating at 90°C Ambient

LT4K 35°C Rise
LT10K 15°C Rise

Operating Temperature Range

LT4K -55°C to +125°C;
LT10K -55°C to +105°C

Maximum Power Dissipation at 90°C

LT4K 0.385 W
LT10K 0.165 W

Weight Max. (Grams) 0.95

Marking DELEVAN; inductance with units and tolerance; date code (YYWWL). Note: An R before the date code indicates a RoHS component.

Example: 1840R-18K

<i>Front:</i>	<i>Reverse:</i>
DELEVAN	3.3uH±10%
3.3uH±10%	R 0910A

Packaging Tape & reel: 12" reel, 2500 pieces max.; 14" reel, 3000 pieces max.

● No MS # Issued

Made in the U.S.A.

DASH NUMBER*	MIL DASH #	INDUCTANCE (µH)	TOLERANCE	Q MINIMUM	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (mA)
--------------	------------	-----------------	-----------	-----------	----------------------	-------------------	------------------------------	-----------------------------

MS75008- SERIES 1840 PHENOLIC CORE (LT4K)								
-00M	21	0.15	± 20%	55	25.0	510	0.030	3050
-02M	22	0.22	± 20%	55	25.0	415	0.035	2820
-04M	23	0.33	± 20%	55	25.0	350	0.050	2360
-05M	●	0.39	± 20%	55	25.0	300	0.080	1860
-06M	24	0.47	± 20%	55	25.0	300	0.080	1860
-07K	25	0.56	± 10%	55	25.0	270	0.100	1670
-08K	26	0.68	± 10%	55	25.0	250	0.120	1520
-09K	27	0.82	± 10%	55	25.0	220	0.180	1240
-10K	28	1.00	± 10%	55	25.0	200	0.250	1050
-11K	29	1.20	± 10%	35	7.9	180	0.400	835
-12K	30	1.50	± 10%	35	7.9	170	0.485	755
-13K	31	1.80	± 10%	35	7.9	150	0.740	610
-14K	32	2.20	± 10%	35	7.9	140	0.900	555
-16K	33	2.70	± 10%	35	7.9	120	1.100	525

MS75101- SERIES 1840 IRON CORE (LT10K)								
-18K	1	3.30	± 10%	35	7.9	70	0.120	1020
-20K	2	3.90	± 10%	35	7.9	65	0.155	900
-22K	3	4.70	± 10%	35	7.9	60	0.210	775
-24K	4	5.60	± 10%	35	7.9	50	0.280	670
-26K	5	6.80	± 10%	35	7.9	50	0.375	580
-28K	6	8.20	± 10%	35	7.9	48	0.400	560
-30K	7	10.0	± 10%	35	7.9	42	0.600	455
-32K	8	12.0	± 10%	50	2.5	36	0.850	385
-34K	9	15.0	± 10%	55	2.5	30	1.200	324
-35K	10	18.0	± 10%	60	2.5	30	1.800	265
-36K	11	22.0	± 10%	60	2.5	24	2.000	251
-38K	12	27.0	± 10%	65	2.5	22	2.750	214

Parts listed above are QPL/MIL qualified

Optional Tolerances: J = 5% H = 3% G = 2% F = 1%
*Complete part # must include series # PLUS the dash #
For surface finish information, refer to www.delevanfinishes.com