



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Type 167/184 Metallized Polyester Radial Lead Capacitors

Radial Box Metallized Polyester Capacitors for Automatic Insertion



The Type 167/184 series radial lead metallized polyester box capacitors are available in bulk (Type 167) or on ammo pack or radial tape and reel (Type 184). These capacitors are constructed in rugged rectangular plastic cases and all come with 7.5 mm (0.3") lead spacing. They are good for general purpose applications such as bypass, decoupling, energy storage/discharge and arc suppression.

Highlights

- Rugged plastic case
- Case and epoxy fill meets UL94V0
- 7.5 mm (0.3") lead spacing
- Bulk, tape and reel or ammo pack
- Non-inductively wound
- Non-polar

Specifications

RoHS Compliant

- Capacitance Range:** 0.001 μF to 1.0 μF
Voltage Range: 63 Vdc to 630 Vdc
Capacitance Tolerance: $\pm 5\%$, $\pm 10\%$, $\pm 20\%$
Operating Temperature Range: $-55\text{ }^\circ\text{C}$ to $+125\text{ }^\circ\text{C}$ (with 50% Vdc derating $>85\text{ }^\circ\text{C}$)
Dielectric Withstand Voltage: 1.6 x rated voltage for 2 sec @ $+25\text{ }^\circ\text{C} \pm 5\text{ }^\circ\text{C}$
Dissipation Factor (DF): $\tan\delta \times 10^{-4}$ at $25\text{ }^\circ\text{C} \pm 5\text{ }^\circ\text{C}$

| kHz | $\tan\delta \times 10^{-4}$ |
|-----|-----------------------------|
| 1 | ≤ 100 |
| 10 | ≤ 150 |

Total Self Inductance (L): Approximately 8 nH

Maximum Pulse Rise Time (dv/dt):


| Vn | V/ μs |
|-----|------------------|
| 63 | 12 |
| 100 | 20 |
| 250 | 32 |
| 400 | 41 |
| 630 | 70 |

If the working voltage (V) is less than the nominal voltage (Vn), the capacitor can work at higher dv/dt. In this case, the maximum value allowed is obtained by multiplying the above value with the ratio Vn/V.

| Long Term Stability (after two years) | |
|--|-----------------------------------|
| Storage | Standard Environmental Conditions |
| Performance | |
| Capacitance Change $\Delta C/C$ | $\leq \pm 3\%$ |

Type 167/184 Metallized Polyester Radial Lead Capacitors

Capacitor Outline Drawing

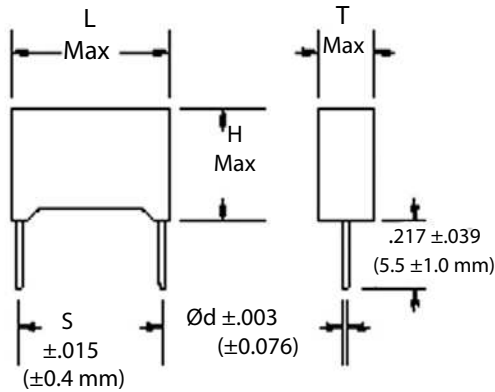

Lead length shown is as supplied on 167 Series

| Soldering | |
|-------------------------|----------------------------------|
| Test Conditions | |
| Soldering Temperature | 260 °C ±5 °C |
| Soldering Duration | 10 sec ±1 sec |
| Performance | |
| Capacitance Change ΔC/C | ≤ ±2% |
| DF Change Δtgδ | ≤30 x 10 ⁻⁴ at 10 kHz |
| Insulation Resistance | ≥ limit value |

Test Method and Performance

| Insulation Resistance | |
|-------------------------|--|
| Test Conditions | |
| Temperature | 25 °C ±5 °C |
| Voltage Charge Time | 1 minute |
| Voltage Charge | 50 Vdc for Vn < 100 Vdc 100 Vdc for Vn ≥ 100 Vdc |
| Performance | |
| For Vn > 100 Vdc | ≥30,000 MΩ (50,000 MΩ typical) |
| For Vn ≤100 Vdc | ≥10,000 MΩ for C ≤ 0.1μF ≥1,000 MΩ x μF for > 0.1μF |
| Damp Heat Test | |
| Test Conditions | |
| Temperature | +40 °C |
| Relative Humidity | 95% |
| Test Duration | 21 days |
| Performance | |
| Capacitance Change ΔC/C | ≤ ±5% |
| DF Change Δtgδ | ≤50 x 10 ⁻⁴ at 1 kHz |
| Insulation Resistance | ≥ 50% of limit value |
| Life Test | |
| Test Conditions | |
| Temperature | +85 °C |
| Test Duration | 1000 hrs |
| Voltage Applied | 1.25 x Vn |
| Performance | |
| Capacitance Change ΔC/C | ≤ ±5% |
| DF Change Δtgδ | ≤30 x 10 ⁻⁴ at 10 kHz |
| Insulation Resistance | ≥ 50% of limit value |

Ratings

RoHS Compliant

| Cap (μF) | Catalog Part Number | Tape & Reel Ammo Pack | Inches | | | | | Millimeters | | | | |
|----------------|---------------------|-----------------------|--------|-------|-------|-------|-------|-------------|-----|------|-----|-----|
| | | | L | T | H | S | Ød | L | T | H | S | Ød |
| 63 Vdc | | | | | | | | | | | | |
| .068 | 167683*63A-F | 184683*63#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .10 | 167104*63A-F | 184104*63#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .15 | 167154*63A-F | 184154*63#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .22 | 167224*63A-F | 184224*63#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .27 | 167274*63A-F | 184274*63#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .33 | 167334*63A-F | 184334*63#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .47 | 167474*63B-F | 184474*63#B>-F | 0.413 | 0.157 | 0.354 | 0.295 | 0.024 | 10.5 | 4.0 | 9.0 | 7.5 | 0.6 |
| .68 | 167684*63C-F | 184684*63#C>-F | 0.413 | 0.197 | 0.433 | 0.295 | 0.024 | 10.5 | 5.0 | 11.0 | 7.5 | 0.6 |
| 1.00 | 167105*63C-F | 184105*63#C>-F | 0.413 | 0.197 | 0.433 | 0.295 | 0.024 | 10.5 | 5.0 | 11.0 | 7.5 | 0.6 |
| 100 Vdc | | | | | | | | | | | | |
| .033 | 167333*100A-F | 184333*100#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .047 | 167473*100A-F | 184473*100#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .068 | 167683*100A-F | 184683*100#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .10 | 167104*100A-F | 184104*100#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .12 | 167124*100B-F | 184124*100#B>-F | 0.413 | 0.157 | 0.354 | 0.295 | 0.024 | 10.5 | 4.0 | 9.0 | 7.5 | 0.6 |
| .15 | 167154*100B-F | 184154*100#B>-F | 0.413 | 0.157 | 0.354 | 0.295 | 0.024 | 10.5 | 4.0 | 9.0 | 7.5 | 0.6 |
| .22 | 167224*100C-F | 184224*100#C>-F | 0.413 | 0.197 | 0.433 | 0.295 | 0.024 | 10.5 | 5.0 | 11.0 | 7.5 | 0.6 |
| .33 | 167334*100C-F | 184334*100#C>-F | 0.413 | 0.197 | 0.433 | 0.295 | 0.024 | 10.5 | 5.0 | 11.0 | 7.5 | 0.6 |

* Indicates capacitance tolerance: J = ±5%, K = ±10%, M = ±20%

Indicates packaging type: R = Tape and Reel, A = Ammo Pack

> Indicates tooling code: A = 16.5 mm, B = 18.5 mm, C = 16.0 mm (See H dimension in taping specifications)

Type 167/184 Metallized Polyester Radial Lead Capacitors

| Cap (μ F) | Catalog Part Number | Tape & Reel Ammo Pack | Inches | | | | | Millimeters | | | | |
|-------------------|------------------------|--------------------------|--------|-------|-------|-------|---------------|-------------|-----|------|-----|---------------|
| | | | L | T | H | S | \emptyset d | L | T | H | S | \emptyset d |
| 250 Vdc | | | | | | | | | | | | |
| .010 | 167103*250A-F | 184103*250#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .015 | 167153*250A-F | 184153*250#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .018 | 167183*250A-F | 184183*250#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .022 | 167223*250A-F | 184223*250#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .027 | 167273*250B-F | 184273*250#B>-F | 0.413 | 0.157 | 0.354 | 0.295 | 0.024 | 10.5 | 4.0 | 9.0 | 7.5 | 0.6 |
| .033 | 167333*250B-F | 184333*250#B>-F | 0.413 | 0.157 | 0.354 | 0.295 | 0.024 | 10.5 | 4.0 | 9.0 | 7.5 | 0.6 |
| .039 | 167393*250B-F | 184393*250#B>-F | 0.413 | 0.157 | 0.354 | 0.295 | 0.024 | 10.5 | 4.0 | 9.0 | 7.5 | 0.6 |
| .047 | 167473*250B-F | 184473*250#B>-F | 0.413 | 0.157 | 0.354 | 0.295 | 0.024 | 10.5 | 4.0 | 9.0 | 7.5 | 0.6 |
| .068 | 167683*250C-F | 184683*250#C>-F | 0.413 | 0.197 | 0.433 | 0.295 | 0.024 | 10.5 | 5.0 | 11.0 | 7.5 | 0.6 |
| .100 | 167104*250C-F | 184104*250#C>-F | 0.413 | 0.197 | 0.433 | 0.295 | 0.024 | 10.5 | 5.0 | 11.0 | 7.5 | 0.6 |
| 400 Vdc | | | | | | | | | | | | |
| .0047 | 167472*400A-F | 184472*400#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .0056 | 167562*400A-F | 184562*400#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .0068 | 167682*400A-F | 184682*400#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .010 | 167103*400A-F | 184103*400#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .015 | 167153*400B-F | 184153*400#B>-F | 0.413 | 0.157 | 0.354 | 0.295 | 0.024 | 10.5 | 4.0 | 9.0 | 7.5 | 0.6 |
| .022 | 167223*400C-F | 184223*400#C>-F | 0.413 | 0.197 | 0.433 | 0.295 | 0.024 | 10.5 | 5.0 | 11.0 | 7.5 | 0.6 |
| .033 | 167333*400C-F | 184333*400#C>-F | 0.413 | 0.197 | 0.433 | 0.295 | 0.024 | 10.5 | 5.0 | 11.0 | 7.5 | 0.6 |
| 630 Vdc | | | | | | | | | | | | |
| .0010 | 167102*630A-F | 184102*630#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .0015 | 167152*630A-F | 184152*630#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .0022 | 167222*630A-F | 184222*630#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .0033 | 167332*630A-F | 184332*630#A>-F | 0.413 | 0.138 | 0.276 | 0.295 | 0.024 | 10.5 | 3.5 | 7.0 | 7.5 | 0.6 |
| .0047 | 167472*630B-F | 184472*630#B>-F | 0.413 | 0.157 | 0.354 | 0.295 | 0.024 | 10.5 | 4.0 | 9.0 | 7.5 | 0.6 |
| .0068 | 167682*630B-F | 184682*630#B>-F | 0.413 | 0.157 | 0.354 | 0.295 | 0.024 | 10.5 | 4.0 | 9.0 | 7.5 | 0.6 |
| .010 | 167103*630C-F | 184103*630#C>-F | 0.413 | 0.197 | 0.433 | 0.295 | 0.024 | 10.5 | 5.0 | 11.0 | 7.5 | 0.6 |
| .015 | 167153*630D-F | 184153*630#D>-F | 0.413 | 0.236 | 0.472 | 0.295 | 0.024 | 10.5 | 6.0 | 12.0 | 7.5 | 0.6 |

* Indicates capacitance tolerance: J = $\pm 5\%$, K = $\pm 10\%$, M = $\pm 20\%$

Indicates packaging type: R = Tape and Reel, A = Ammo Pack



> Indicates tooling code: A = 16.5 mm, B = 18.5 mm, C = 16.0 mm (See H dimension in taping specification)

Part Numbering System for Bulk Items


| | | | | | |
|---------------|---------------------|------------------|----------------|------------------|----------------------------------|
| 167 | 104 | K | 100 | A | -F |
| | | | | | |
| Series | Capacitance | Tolerance | Voltage | Case Code | RoHS Compliant Designator |
| 167 | 392 = .0039 μ F | J = $\pm 5\%$ | 63 = 63 Vdc | A | |
| | 103 = .01 μ F | K = $\pm 10\%$ | 100 = 100 Vdc | B | |
| | 104 = .1 μ F | M = $\pm 20\%$ | 250 = 250 Vdc | C | |
| | 105 = 1.0 μ F | | 630 = 630 Vdc | D | |

Type 167/184 Metallized Polyester Radial Lead Capacitors

Tape Specification - 7.5 mm Lead Spacing

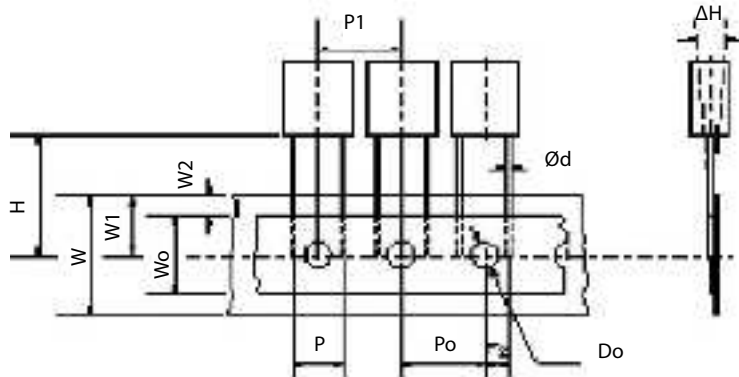

Reel
Packing



Ammo Box
Packing

| Item | Code | Millimeters | Inches |
|--------------------------------------|----------------|----------------------------|------------------------------|
| Lead-Wire Diameter | Ød | 0.6 ^{+0.04 -0.01} | .024 ^{±.001} |
| Lead-to-Lead Distance | P | 7.5 ^{+0.6 -0.2} | .295 ^{+0.024 -.040} |
| Feed Hole Pitch | P ₀ | 2.7 ^{±0.3} | .5 ^{±.012} |
| Pitch of Component | P ₁ | 12.7 ^{±1.0} | .5 ^{±.039} |
| Hole Center to Lead | P ₂ | 3.75 ^{±0.7} | .148 ^{±.028} |
| Component Alignment, F-R | Δh | 0 ^{±2.0} | 0 ^{±.079} |
| Tape Width | W | 18 ^{+1.0 -0.1} | .709 ^{+0.039 -.004} |
| Hold-down Tape Width | W ₀ | 6.0 min | .236 min |
| Hole Position | W ₁ | 9.0 ^{+0.75 -0.05} | .355 ^{+0.030 -.001} |
| Hold-down Tape Position | W ₂ | 3.0 Max | .118 Max |
| Height of Component from Tape Center | H | > | > |
| Feed Hole Diameter | D ₀ | 4.0 ^{±0.3} | .157 ^{±.012} |

| Case Code | Quantity Reeled | Quantity Ammo Pack |
|-----------|-----------------|--------------------|
| A | 1800 | 1500 |
| B | 1500 | 1500 |
| C | 1200 | 1000 |
| D | 1000 | 1000 |

> The H dimension depends on the insertion equipment used. Specify the proper tooling code as indicated below.

| Tooling Code | H Dimensions | |
|--------------|-----------------------|------------------------|
| | Millimeters | Inches |
| A | 16.5 ^{±0.75} | .679 ^{±0.030} |
| B | 18.5 ^{±0.75} | .728 ^{±0.030} |
| C | 16.0 ^{±0.75} | .630 ^{±0.030} |

Part Numbering System for Auto Insertion

| | | | |
|---------------|--------------------|------------------|----------------|
| 184 | 104 | K | 100 |
| | | | |
| Series | Capacitance | Tolerance | Voltage |
| 184 | 392 = .0039 µF | J = ±5% | 63 = 63 Vdc |
| | 103 = .01 µF | K = ±10% | 100 = 100 Vdc |
| | 104 = .1 µF | M = ±20% | 250 = 250 Vdc |
| | 105 = 1.0 µF | | 630 = 630 Vdc |

| | | | |
|---------------------------|------------------|-----------------------------|----------------------------------|
| R | A | B | -F |
| | | | |
| Packaging Type (#) | Case Code | *Tooling Code (>) | RoHS Compliant Designator |
| A = Ammo | A | A | |
| R = Tape & Reel | B | B | |
| | C | C | |
| | D | | |

* Tooling code is at the discretion of the user depending on the insertion equipment being used. See table for specific "H" dimensions

* Tooling code (>) depends on the users insertion equipment requirements. See table for available options.

Type 167/184 Metallized Polyester Radial Lead Capacitors

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.