



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Order No.: 1864066

Type: SDC 2,5/ 5-PV-5,0-ZB

Plug component, Push-in spring connection

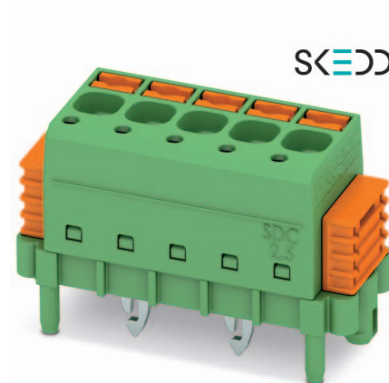

The figure shows a 5-pos. version of the product

1 Main features



- | | | | |
|---------------------------|---------------------------|------------------------|---------------------|
| • Number of positions | 5 | • Nominal current | 12 A |
| • Conductor cross section | 2.5 mm ² | • Nominal voltage | 200 V |
| • Color | green | • Connection direction | 0 ° |
| • Pitch | 5.00 mm | • Type of packaging | packed in cardboard |
| • Connection method | Push-in spring connection | | |

2 Your advantages

- ✓ SKEDD direct plug-in technology enables flexible positioning on the PCB
- ✓ Reduced component and process costs: simple insertion by hand and vibration-resistant connection
- ✓ Time saving push-in connection, tools not required
- ✓ Intuitive use through colour coded actuation lever
- ✓ Quick and convenient testing using integrated test option



Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1864066

3 Table of contents

| | | |
|----|---|---|
| 1 | Main features..... | 1 |
| 2 | Your advantages | 1 |
| 3 | Table of contents | 2 |
| 4 | 3D model in PDF can be activated (Acrobat Reader only)..... | 3 |
| 5 | Item properties..... | 4 |
| | 5.1 Connection capacity | 4 |
| | 5.2 Material data | 4 |
| | 5.3 Dimensions | 4 |
| 6 | Series drawing..... | 5 |
| 7 | Packaging information | 6 |
| 8 | Application..... | 6 |
| | 8.1 Temperature limit values | 6 |
| 9 | Mechanical tests..... | 7 |
| | 9.1 Air and creepage distances | 7 |
| 10 | Electrical tests | 8 |
| | 10.1 Electrical data | 8 |
| | 10.2 Current carrying capacity/derating curves | 8 |
| 11 | Type approval and special tests | 8 |
| 12 | Approvals | 8 |
| 13 | Commercial data | 8 |
| | 13.1 Combination tests..... | 9 |

1864066 SDC 2,5/ 5-PV-5,0-ZB

4 3D model in PDF can be activated (Acrobat Reader only)



1864066 SDC 2,5/ 5-PV-5,0-ZB**5 Item properties**

| | |
|---------------------|---|
| Order No. | 1864066 |
| Type | SDC 2,5/ 5-PV-5,0-ZB |
| Range of articles | SDC 2,5/...-PV |
| Pitch | 5.00 mm |
| Number of positions | 5 |
| Connection method | Push-in spring connection |
| Mounting type | SKEDD - Direct plug-in technology |
| Pin layout | ZB - Zig-zag back pinning W |
| Note | WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201 |

5.1 Connection capacity

| | |
|---|---|
| Conductor cross section, solid | 0.2 mm ² to 2.5 mm ² |
| Conductor cross section, flexible | 0.2 mm ² to 2.5 mm ² |
| Conductor cross section AWG/kcmil | 24 to 12 |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm ² to 2.5 mm ² Ferrule see above |
| Conductor cross section flexible, with ferrule with plastic sleeve | 0.25 mm ² to 2.5 mm ² Ferrule see above |
| Stripping length | 10 mm |

5.2 Material data

| | | |
|--|---------------------------------------|-------------------|
| Material of metal parts | | |
| Contact material | Cu alloy | |
| Surface contact area | Ni 1.5 µm ... 4 µm , Sn 4 µm ... 8 µm | |
| Soldering area surface | | |
| Surface characteristics | Tin-plated | |
| Insulating material data | Housing | Actuation element |
| Insulating material | PA | PBT |
| CTI according to IEC 60112 | 600 | 275 |
| Flammability rating according to UL 94 | V0 | V0 |
| Color | green (6021) | orange (2003) |

5.3 Dimensions

| | |
|------------------------------|----------|
| Dimension a | 20 mm |
| Length | 15.3 mm |
| Width | 33.18 mm |
| Constructional height | 21.2 mm |
| Height | 21.2 mm |
| Length of the solder pin [P] | 4.7 mm |
| Pin spacing | 10.00 mm |
| Hole diameter | 2.4 mm |

1864066 SDC 2,5/ 5-PV-5,0-ZB

7 Packaging information

| | |
|----------------------|---------------------|
| Type of packaging | packed in cardboard |
| Outer packaging type | Carton |

8 Application

8.1 Temperature limit values

| | |
|---|---|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Ambient temperature (assembly) | -5 °C ... 100 °C |
| Ambient temperature (operation) | -40 °C ... X °C (dependent on the derating curve) |

1864066 SDC 2,5/ 5-PV-5,0-ZB**9 Mechanical tests**

| Mechanical test group A | |
|-------------------------------------|------------------------|
| Specification | IEC 61984:2008-10 |
| Visual test | Test passed |
| Specification | IEC 60512-1-1:2002-02 |
| Dimensional test | Test passed |
| Specification | IEC 60512-1-2:2002-02 |
| Resistance of marking | Test passed |
| Specification | IEC 60068-2-70:1995-12 |
| Insertion and withdrawal force | Test passed |
| Specification | IEC 60512-13-2:2006-02 |
| No. of cycles | 25 |
| Insertion strength per pos. approx. | 8 N () |
| Withdraw strength per pos. approx. | 6 N () |
| Polarization and coding | Test passed |
| Specification | IEC 60512-13-5:2006-02 |
| Test force | 20 N |
| Contact retention in insert | Test passed |
| Specification | IEC 60512-15-1:2008-05 |
| Test force per pos. | 20 N |

9.1 Air and creepage distances

| Component | | | |
|---|---------------------|--------|--------|
| Specification | IEC 60664-1:2007-04 | | |
| Mains type | unearthed mains | | |
| Insulating material group | | | |
| Comparative tracking index (IEC 60112:2003-01) | CTI 275 | | |
| Rated insulation voltage | 200 V | 320 V | 320 V |
| Rated surge voltage | 4 kV | 4 kV | 4 kV |
| Degree of pollution | 3 | 2 | 2 |
| Overvoltage category | III | III | II |
| Minimum clearance case A (inhomogeneous field) | 3 mm | 3 mm | 3 mm |
| Minimum value of the creepage path requirement in acc. with table | 3.2 mm | 3.2 mm | 3.2 mm |

1864066 SDC 2,5/ 5-PV-5,0-ZB**10 Electrical tests****10.1 Electrical data**

| | | | | |
|--|------|--|--|---|
| Rated current/rated insulation voltage/rated surge voltage/degree of pollution | 12 A | | | 2 |
|--|------|--|--|---|

10.2 Current carrying capacity/derating curves


| | |
|-------------------------|---|
| Specification | |
| Note | Representation based on IEC 60512-5-2:2002-02 |
| Reduction factor | |
| Number of positions | See diagram |
| Conductor cross section | |
| Note | |

11 Type approval and special tests**12 Approvals****13 Commercial data**

| | |
|-----------------------|----------------------|
| Order No. | 1864066 |
| Type | SDC 2,5/ 5-PV-5,0-ZB |
| GTIN | 4055626210360 |
| Pieces per package | 50 |
| Net weight (SAP) | 6.85 g |
| Customs tariff number | |
| Country of origin | |

1864066 SDC 2,5/ 5-PV-5,0-ZB

13.1 Combination tests



SDC 2,5/..-PV

| | | | | |
|--|---|--|--|--|
| Specification | IEC 61984 | | | |
| Mechanical tests | | | | |
| Insertion/withdrawal force per position | 8 N / 6 N | | | |
| | Test passed | | | |
| Contact holder in insert Requirements > 24 N | Test passed | | | |
| | | | | |
| | 1.1 mΩ | | | |
| Insertion/withdrawal cycles | 25 | | | |
| | Test passed | | | |
| | Test passed | | | |
| Rated voltage (III/2) | 320 V | | | |
| | | | | |
| | 16 | | | |
| | 2.5 mm ² | | | |
| Test current | Test passed | | | |
| | | | | |
| | -40 °C/2 h | | | |
| | 100 °C/168 h | | | |
| | 0.2 dm ³ SO ₂ on 300 dm ³ /40 °C/1 cycle | | | |
| | Test passed | | | |
| | Test passed | | | |
| | Test passed | | | |
| Environmental and durability tests | | | | |
| Result, degree of protection, IP code | Finger safety (IP20 test finger) in acc. with IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 | | | |