



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MC 0,5/ 4-G-2,5

Order No.: 1881464

The figure shows a 10-position version of the product
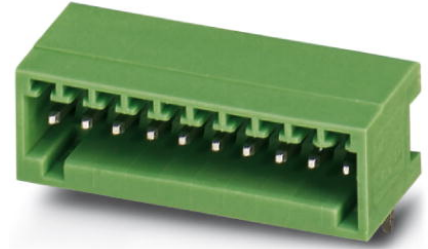
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1881464>Header, Nominal current: 4 A, Nom. voltage: 80 V, Pitch: 2.5 mm,
Number of positions: 4, Color: green, Assembly: Soldering

Commercial data

| | |
|--------------------------|--------------------|
| EAN | 4017918156701 |
| Pack | 50 pcs. |
| Customs tariff | 85366990 |
| Weight/Piece | 0.001094 KG |
| Catalog page information | Page 140 (CC-2009) |

Product notes

WEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

| | |
|---------------------|---------|
| Length | 10.1 mm |
| Height | 8.1 mm |
| Pitch | 2.5 mm |
| Dimension a | 7.5 mm |
| Number of positions | 4 |

| | |
|----------------|--------------|
| Pin dimensions | 0,8 x 0,8 mm |
| Hole diameter | 1.2 mm |

Technical data

| | |
|------------------------------------|--------|
| Insulating material group | I |
| Rated surge voltage (III/3) | 1.5 kV |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated surge voltage (II/2) | 2.5 kV |
| Rated voltage (III/2) | 160 V |
| Rated voltage (II/2) | 320 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current I_N | 4 A |
| Nominal voltage U_N | 80 V |
| Maximum load current | 4 A |
| Insulating material | PA |
| Inflammability class acc. to UL 94 | V0 |

Certificates / Approvals



Certification

CB, CUL, GOST, UL, VDE-PZI

CUL

| | |
|-----------------------|-------|
| Nominal voltage U_N | 125 V |
| Nominal current I_N | 4 A |

UL

| | |
|-----------------------|-------|
| Nominal voltage U_N | 125 V |
| Nominal current I_N | 4 A |

Accessories

| Item | Designation | Description |
|---------|--------------------------|--|
| 0804853 | SK 2,54/2,8:FORTL.ZAHLEN | Marker card, printed horizontally, self-adhesive, 10-section marker strip, 14 identical decades marked 1-10, 11-20 etc. up to 91-100, sufficient for 140 terminal blocks |

Plug/Adapter

| | | |
|---------|-----------|--|
| 1881435 | CP-MC 0,5 | Keying profile, is inserted into the groove in the header, red insulating material |
|---------|-----------|--|

Additional products


| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

General



| | | |
|---------|---------------------|--|
| 1881341 | FK-MC 0,5/ 4-ST-2,5 | Plug component, Nominal current: 4 A, Nom. voltage: 100 V, Pitch: 2.5 mm, Number of positions: 4, Connection type: Spring-cage conn., Color: green |
|---------|---------------------|--|

Diagrams/Drawings


Drilling plan/solder pad geometry

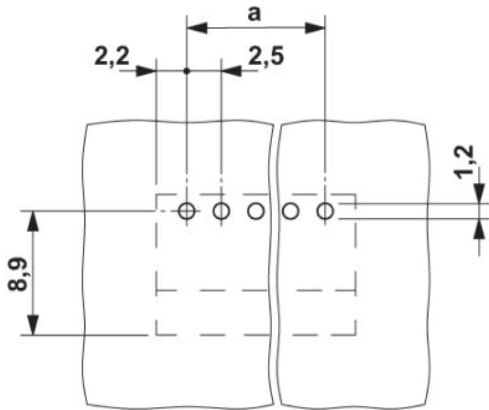

Diagram

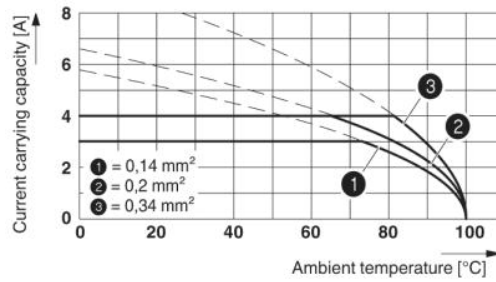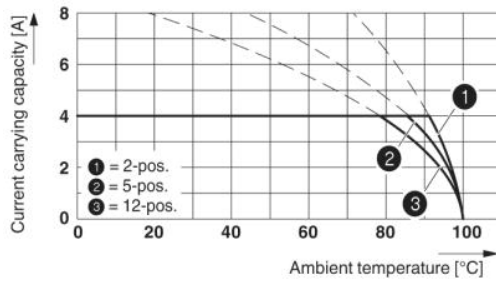

Dimensioned drawing

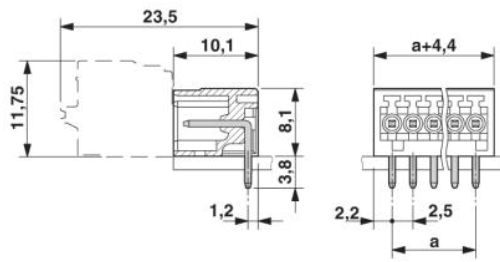

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;