



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Z-PACK 2mm HM Connectors (Continued)

Types L, M and N Daughter Board Connectors with DIN Cavities

DIN Contacts

DIN contacts can be fitted to types L, M and N male and female housings. These housings have 3 or 6 4.8mm [.189] diameter cavities for high current, coaxial or fiber optic contacts conforming to DIN 41626.

Female housings are press fit to the daughter cards.

Contacts for these housings are shown on pages 233-235.

Electrical Characteristics — page 192, also refer to DIN specifications.

Materials and Finish

Glass filled polyester housing, gray, UL94 V-0 rated.
 Phosphor-bronze signal contacts.
 Contact area 0.8µm Au over 1.3µm Ni.
 ACTION PIN contact 0.5µm Sn/Pb over 1.3 µm Ni

Coding Keys for type L & M, page 243.


Board layout page 260 for guidance only.

Note:

Housings must be reamed to accept DIN Fiber Optic Contacts. Use AMP tool pn 434779-1 to ream the cavities. Fiber Optic Contacts are available from specialist manufacturers.



Type L
6 DIN cavities

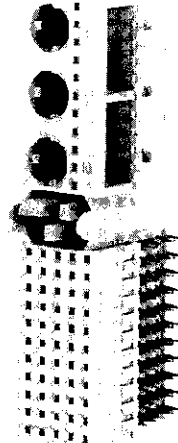


Type M
55 signal contacts and
3 DIN cavities



Guiding &
polarizing lugs

Type N
3 DIN cavities




Type L, M, N Connectors with DIN contact cavities for high current, coaxial and fiber optic connections

Plastic modules provide press-fit, polarized assembly onto free boards. Cavities accept high current, coaxial or fiber optic contacts as per DIN 41626.


Illustration left, shows Type L connector, top to bottom:

- high current contact, to-board
- high current contact, to-cable
- fiber optic contact
- fiber optic contact
- coaxial contact, to-cable
- coaxial contact, to-board

Standard Version



Reduced Crosstalk Version



e d c b a

Row c to ground

Part Numbers	
Type L	100746-1
Type M	100750-1
Type M Reduced CrossTalk	188215-1
Type M with upper Ground Return Shield fitted	352177-1
Type M Reduced CrossTalk with Upper Shield	352380-1
Type M lower Ground Return Shield	352112-2
Type N	100752-1

Backplane Systems

Backplane Connectors