



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

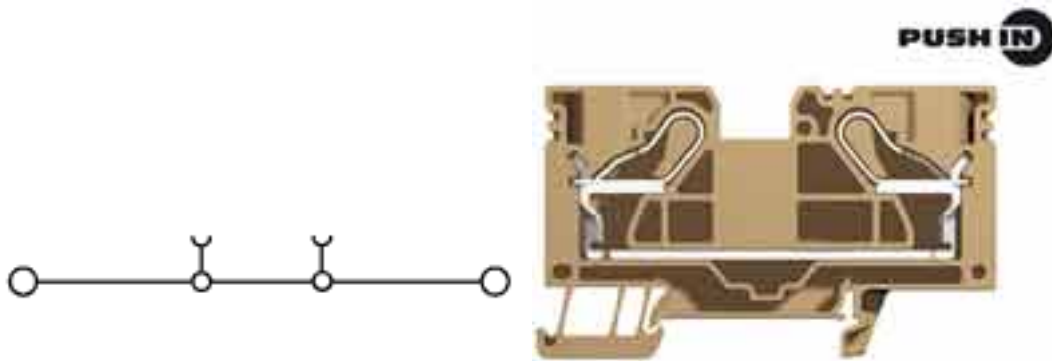

**General ordering data**

Order No.	1896400000
Part designation	PDU 16
Version	Feed-through terminal, 16 mm <sup>2</sup> , Push-In, Wemid, dark beige, TS 35
EAN	4032248511518
Qty.	25 pc(s).

**PT OKIECEEx/ATEX rating data**

EU-type examination certificate	KEMA06ATEX0177U
Download, German	KEMA06ATEX0177U_d.pdf
Download English	KEMA06ATEX0177U_e.pdf
IECEX Certificate of Conformity	IECEXKEM06.0032U
Download	IECEXKEM06.0032U_e.pdf
ATEX voltage	550 V
ATEX current	59 A
ATEX conductor cross-section	16 mm <sup>2</sup>
IECEX voltage	550 V
IECEX current	59 A
IECEX conductor cross-section	16 mm <sup>2</sup>
Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	Einsatztemperaturbereich siehe EG-Baumusterprüfbescheinigung/IECEX-Certificate of Conformity
Marking EN 60079-7	Ex e II
Marking ATEX Directive 94/9/EC	Ex II 2 G D

**Additional technical data**

Colour of insulating material	dark beige
Connection direction	top
End plate required	Yes
Explosion-tested version "Ex e"	No
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of levels	1
No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Type of connection	Plugged

**Additional technical data**

Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Feed-through terminal

**Conductors for clamping (rated connection)**

Clamping range, min.	2.5 mm <sup>2</sup>
Clamping range, max.	16 mm <sup>2</sup>
Type of connection	Push-In
2nd type of connection	plugged
Connection direction	top
Stripping length	14 mm
Blade size	1.0 x 5.5 mm
Solid, min.	2.5 mm <sup>2</sup>
Solid, max.	16 mm <sup>2</sup>
Flexible, min.	2.5 mm <sup>2</sup>
Flexible, max.	16 mm <sup>2</sup>
Flexible, max.	16 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228/1)	2.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228/1)	16 mm <sup>2</sup>
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	2.5 mm <sup>2</sup>
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	10 mm <sup>2</sup>

**Dimensions**

Width	12.1 mm
Height of lowest version	48 mm
Length	80.5 mm
TS 35 offset	39 mm

**Rating data**

Rated cross-section	16 mm <sup>2</sup>
Rated voltage	800 V
Rated impulse voltage	8 kV
Rated current	76 A
Pollution severity	3

**Approvals**

Approvals institutes

**Downloads**

STEP	1896400000_41786_PDU_16_STP.stp
------	---------------------------------

#### Classifications

eClass 4.1	27-14-11-20
eClass 5.0	27-14-11-20
eClass 5.1	27-14-11-20

#### Similar products

Order No.	Part designation	Version
1896220000	PDU 16 BL	Feed-through terminal, 16 mm <sup>2</sup> , Push-In, Wemid, blue, TS 35
1918780000	PEI 16	Feed-through terminal, 16 mm <sup>2</sup> , Push-In, Wemid, dark beige, TS 35
1918790000	PEI 16 BL	Feed-through terminal, 16 mm <sup>2</sup> , Push-In, Wemid, blue, TS 35