

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# **SPECIFICATIONS**


(RoHS Compliant)

 Model Number:
 MR77B3
 Version: 01

 Part Number:
 19028309A
 Jan 09, 2018



### **Mechanical Drawing:**

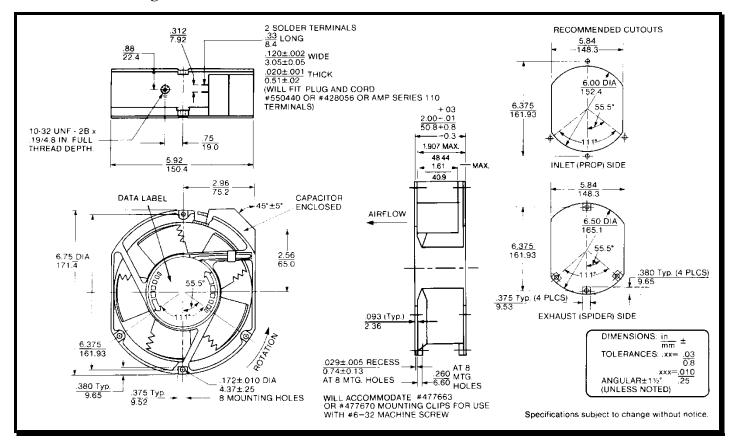

### **Motor:**

Nominal Voltage = 220 / 230 VAC
Frequency = 50 / 60 Hz
Nominal Running Current = 0.13 / 0.14 Amps
Max. Locked Rotor Current = 0.25 Amps
Running Power = 26 / 30 Watts
Average Speed = 2850 / 3350 RPM

Bearings = Ball

Air Flow = 200 / 235 CFM Acoustic = 52.2 / 55.8 dBA

#### **Construction:**

Venturi: Single Piece Die-Cast Aluminum, Black.

Propeller: Plastic, Black, UL 94V-0

#### **Life Expectancy:**

This fan is designed for continuous duty life of 62,000

hours at 40°C.

### **Additional Features:**

Permanent Split Capacitor Motor

Thermal Protection Automatic Restart

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

#### **Termination:**

2x0.120" Terminals

## **Agency Approvals:**

UL, CUL, CE

# **PQ** Curve:

