



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATIONS


RoHS Compliant



Model Number: GL24B7
Part Number: 031636

March 29, 2005

Mechanical Drawing:

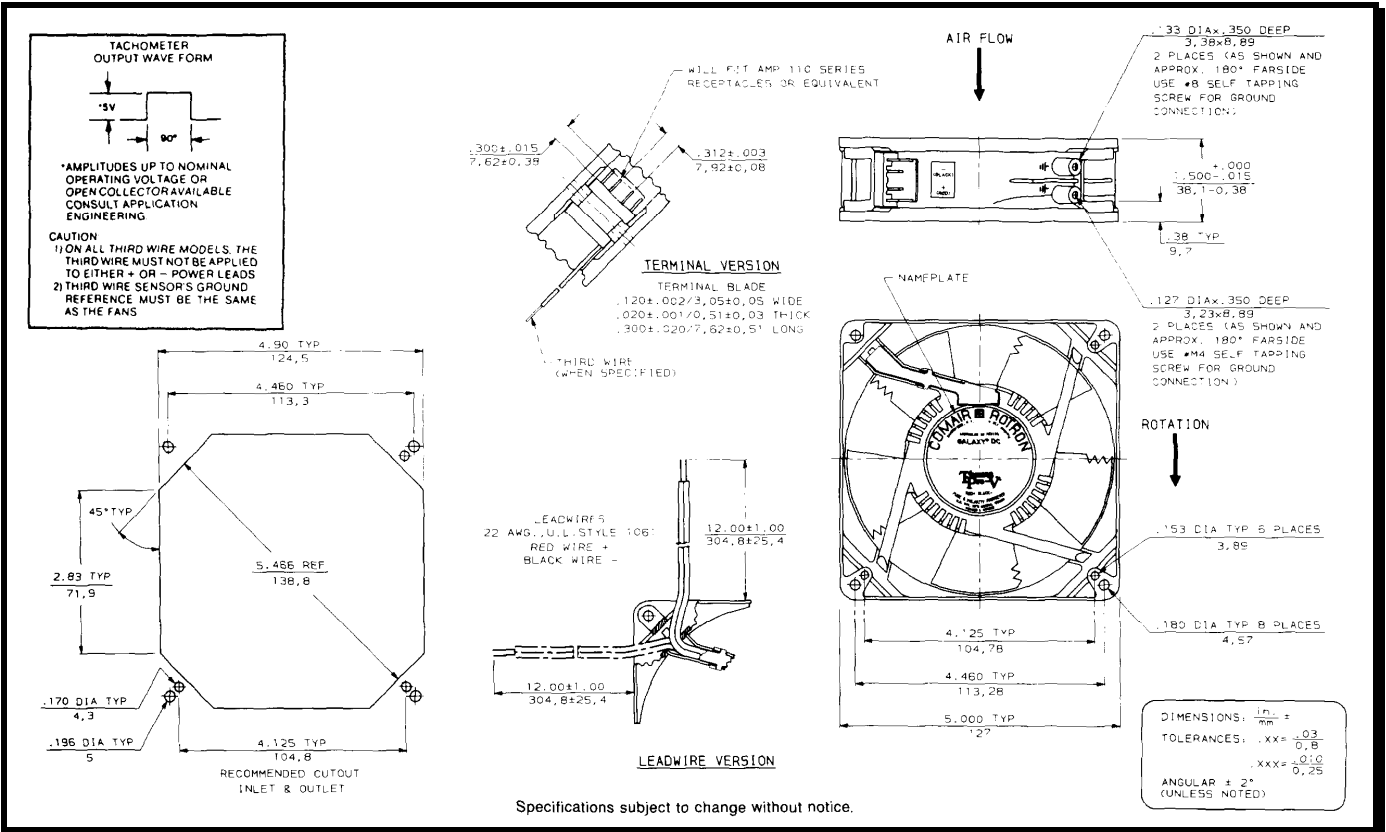

Motor:

Nominal Voltage = 24 vdc
 Operating Voltage Range = 12 - 24 vdc
 Nominal Running Current = 0.630 amps
 Locked Rotor Current = 1.350 amps
 Running Power = 15.0 watts
 Average Speed = 3200 RPM
 Bearings = Ball
 Air Flow = 150 CFM
 Acoustic = 53.6 dBA

Construction:

Venturi: Die cast zinc alloy, painted black.
 Propeller: Plastic, Black, UL 94V-0.

Life Expectancy:

This fan is designed for continuous duty life of 82,500 hours at 50°C.

Agency Certifications:

UL, CE

Additional Features:

Brushless DC Motor
 Locked Rotor Protection
 Automatic Restart Capability
 Reverse Polarity Protected
 Operating Temperature: -10°C to 70°C
 Storage Temperature: -40°C to 85°C

Tachometer:

Output: 5vdc TTL
 I_c : 5mA Typical
 Isolated: No
 Pulses per Revolution: 2

Termination:

12" Lead wires, UL 1061, 22 AWG
 Red - Power (+)
 Black - Ground (-)
 Blue/White - Tachometer (Output)