## imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.


We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



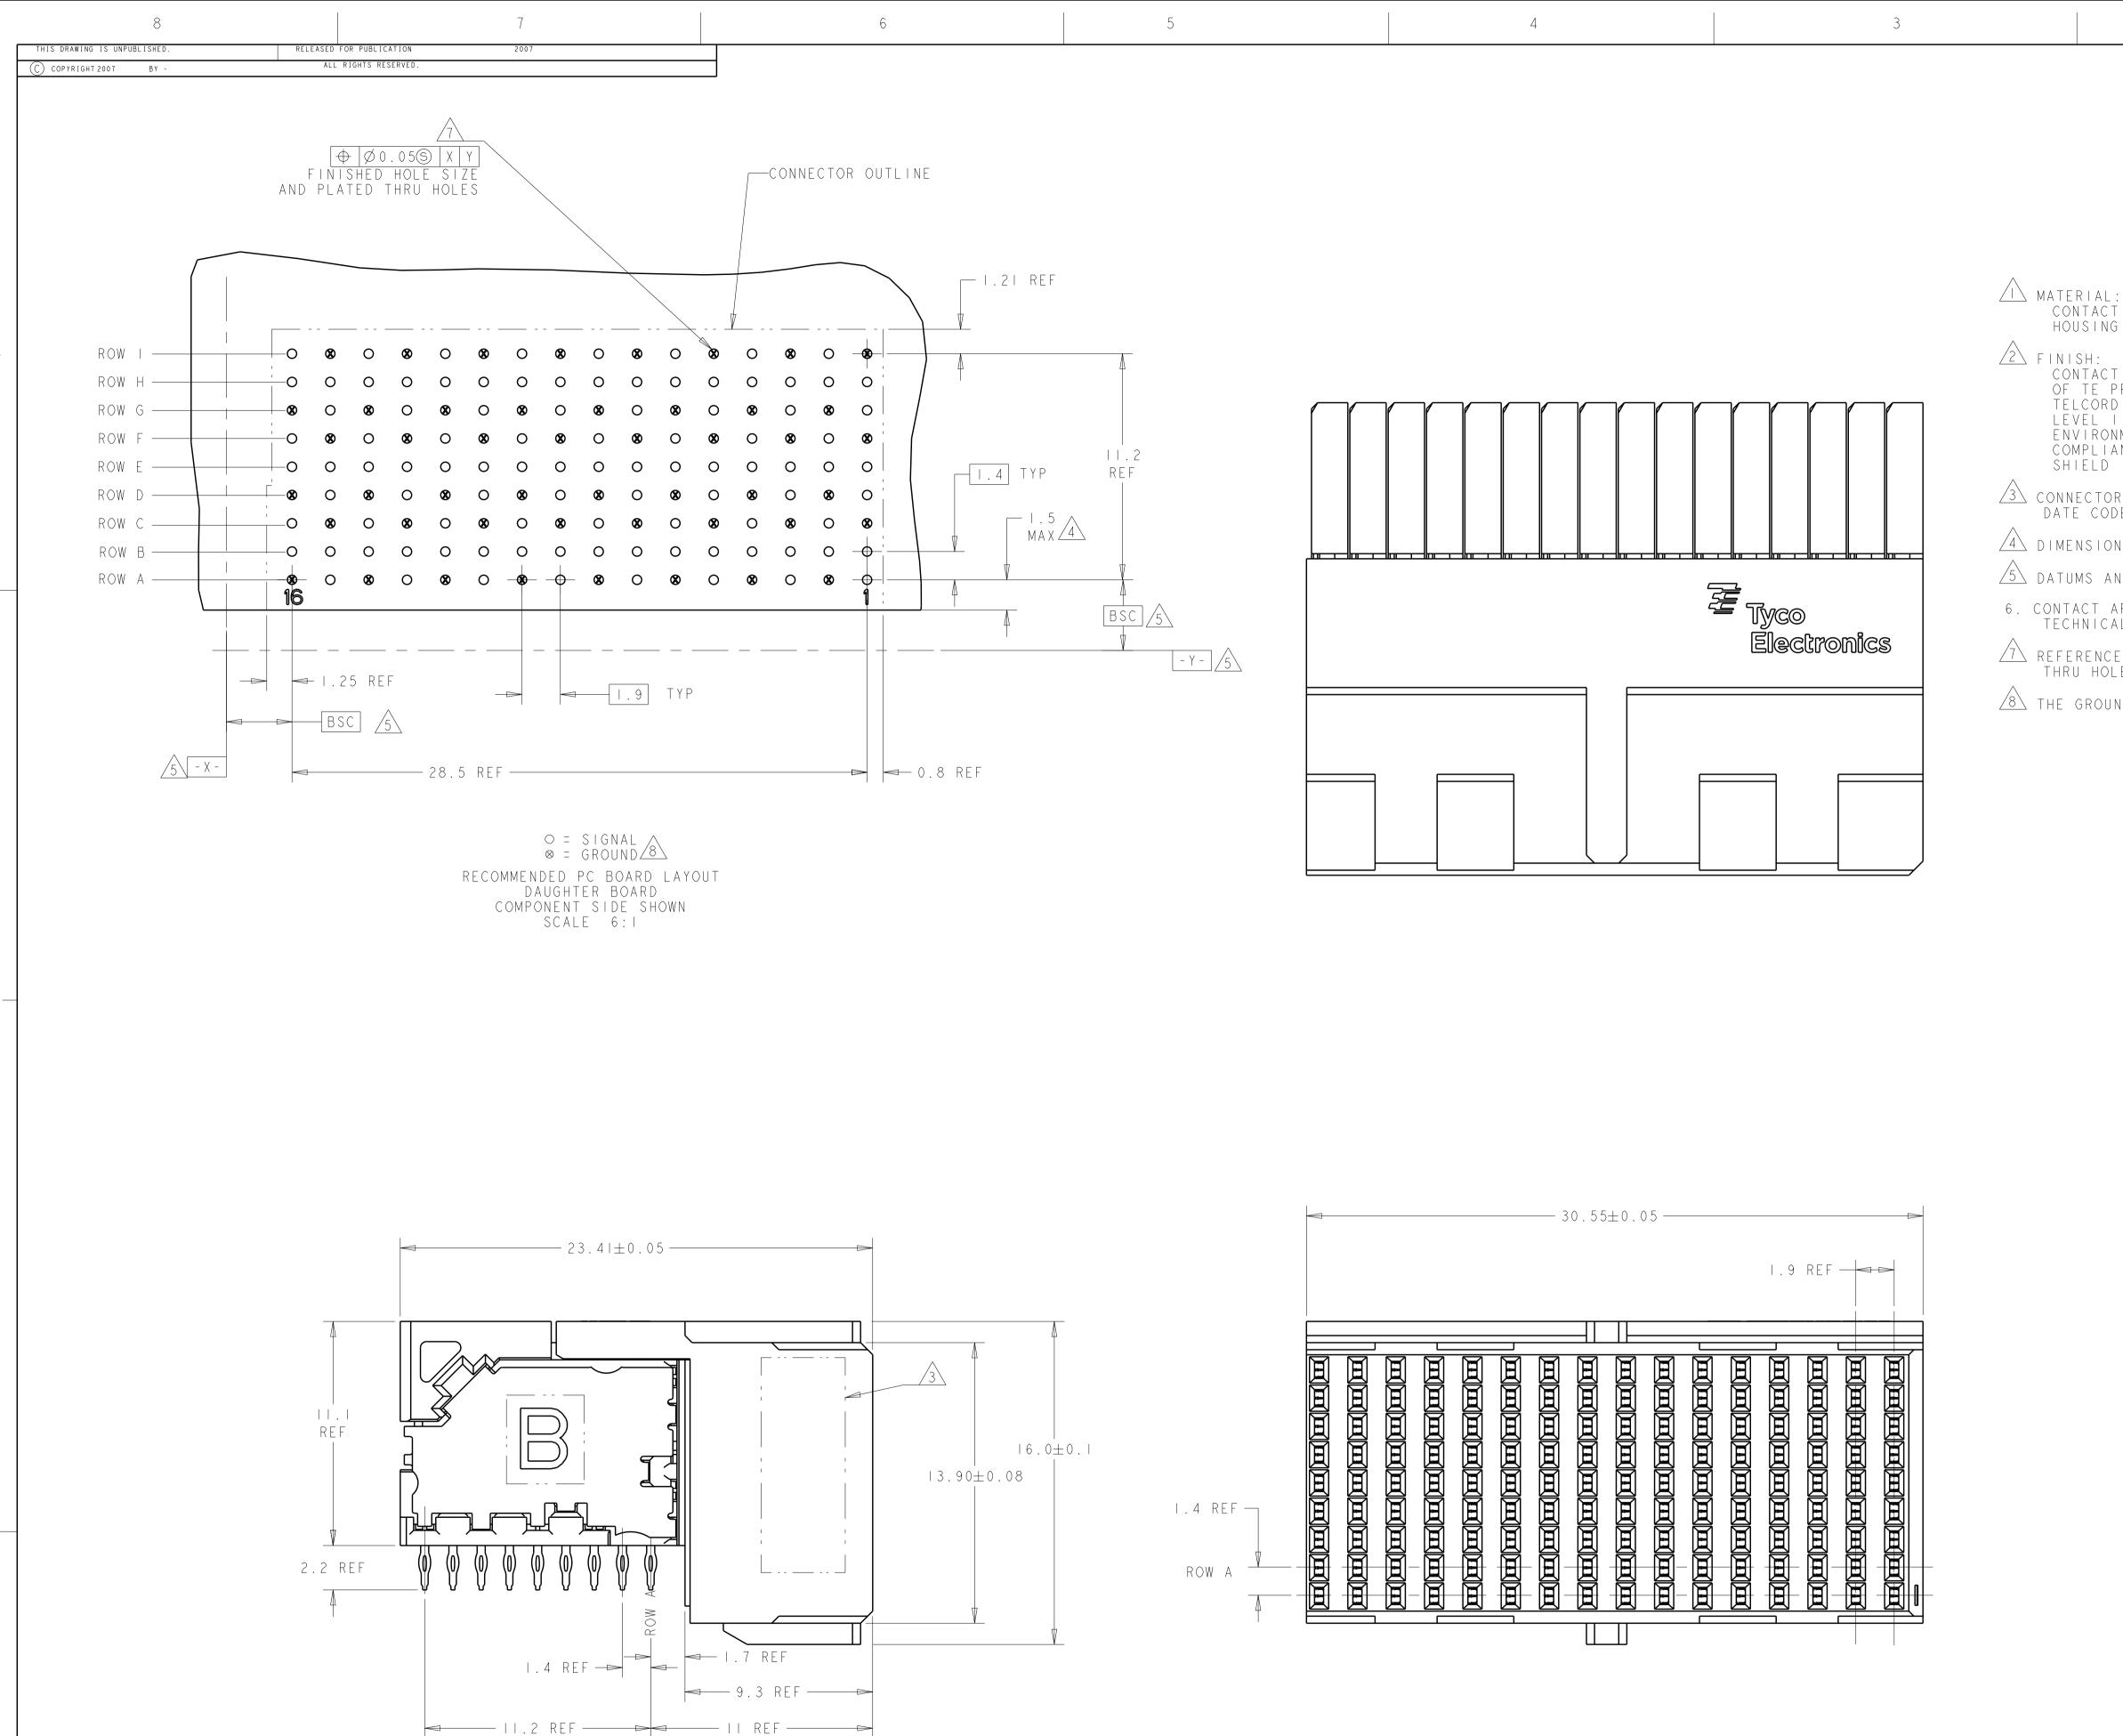

4805 (3/11)

THIS DRAWING IS A CO DIMENSIONS: mm MATERIAL -

	2					1				
LOC	DIST	REVISIONS								
АD	00	Ρ	LTR		DESCRIPTION		DATE	DWN	APVD	
			D	REVISED PER	ECO-13-002771		22FEB20I3	КН	RP	
	A D	2 AD 00			AD OO PLTR		AD 00 P LTR DESCRIPTION	AD 00 P LTR DESCRIPTION DATE	AD 00 P LTR DESCRIPTION DATE DWN	

CONTACT AND SHIELD - PHOS BRONZE HOUSING AND CHICKLET - LCP, UL 94V-0, COLOR - BLACK

CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III APPLICATIONS IN CONTROLLED

ENVIRONMENTS (CENTRAL OFFICE). COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL. SHIELD 1.27µm MIN NICKEL.

CONNECTOR MARKED ON EITHER SIDE OF HOUSING WITH PART NUMBER, DATE CODE AND STANDARD IN APPROXIMATE AREA SHOWN.

 $\triangle$  DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.

5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.

6. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE I, NOVEMBER 1995.

REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.

A THE GROUNDS IN EACH COLUMN ARE COMMONED.

CONTROLLED DOCUMENT.		DWN 31 JAN 2007 S.J. MAGARO снк 31 JAN 2007 W. DAVIS	<b>TE</b> TE Connectivity				
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 3 PLC ±-		RECEPTACLE ASSEMBLY, 3 PAIR, 16 COLUMN -				
	3 PLC ±- 4 PLC ±- ANGLES ±- FINISH	weight		RICTED TO			
	- 2	CUSTOMER DRAWING	$\frac{ A  00779 C- 934229}{ SCALE  6:  SHEET  0F  }$	- Rev			

|934229-

PART NUMBER