



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## OMNIMATE Power - series WGK WGK 25/Z

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com



The WGK finger-proof-insulated enclosures are especially suitable as industrial electronic enclosures for frequency converters, power supplies or filter components which offer a convenient and reliable form of connection internally and externally.

### General ordering data

Order No.	<a href="#">1936910000</a>
Type	WGK 25/Z
Version	OMNIMATE Power - series WGK, Feedthrough terminal, Rated cross-section: 25 mm <sup>2</sup> , Screw connection, Grey, Direct mounting, Feed-through (bushing)
GTIN (EAN)	4032248664528
Qty.	50 pc(s).

**OMNIMATE Power - series WGK  
WGK 25/Z**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Length	68.5 mm	Width	15.1 mm
Height	48.5 mm	Height of lowest version	48.5 mm
Net weight	64.46 g		

**2 clampable conductors with identical cross-section**

Wire connection cross section AWG, max.	AWG 3	Wire connection cross section AWG, min.	AWG 10
---	-------	---	--------

**Additional connection**

Blade size	1.2 x 6.5 mm	Clamping screw	M 6
Rated current	101 A	Tightening torque, max.	4.5 Nm
Tightening torque, min.	4 Nm		

**Conductors suitable for clamping**

Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	10 mm <sup>2</sup>	Twin wire-end ferrules, max.	10 mm <sup>2</sup>
Twin wire-end ferrules, min.	2.5 mm <sup>2</sup>	Wire connection cross section AWG, max.	AWG 3
Wire connection cross section AWG, min.	AWG 10	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	25 mm <sup>2</sup>
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	4 mm <sup>2</sup>	Wire connection cross section, finely stranded, max.	25 mm <sup>2</sup>
Wire connection cross section, solid core max. rated connection	16 mm <sup>2</sup>	Wire connection cross section, solid core, max. rated connection	6 mm <sup>2</sup>
Wire connection cross section, stranded, rated connection, max.	35 mm <sup>2</sup>	Wire connection cross section, stranded, rated connection, min.	10 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	25 mm <sup>2</sup>	Stripping length	18 mm

**Rated data to IEC**

Current at maximum wires	125 A	Pollution severity	3
Rated cross-section	25 mm <sup>2</sup>	Rated current	101 A
Rated impulse withstand voltage	6 kV	Rated voltage	690 V
Standards	IEC 60947-7-1		

**Technical data**

Blade size	1.2 x 6.5 mm	Clamping range, rated connection, max.	35 mm <sup>2</sup>
Clamping range, rated connection, min.	5.26 mm <sup>2</sup>	Clamping screw	M 6
Gauge to IEC 60947-1	B8	Number of connections	2
Stripping length, rated connection	18 mm	Tightening torque, max.	4.5 Nm
Tightening torque, min.	4 Nm		

**OMNIMATE Power - series WGK  
WGK 25/Z**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data**
**Technical specification**

Colour of insulating material	Grey	Connection direction	on side
Installation advice	Direct mounting, Feed-through (bushing)	Product family	OMNIMATE Power - series WGK
Type of mounting	Direct mounting		

**CSA ratings data**

Certificate No. (CSA)	200039-1830694	Voltage size B (CSA)	600 V
Voltage size C (CSA)	600 V	Current size B (CSA)	100 A
Current size C (CSA)	100 A	Wire cross section max. (CSA)	3 AWG
Wire cross section min. (CSA)	8 AWG		

**UL ratings data**

Certificate No. (cURus)	E60693VOL1SEC84	Conductor size Factory wiring max. (cURus)	3 AWG
Conductor size Factory wiring min. (cURus)	10 AWG	Conductor size Field wiring max. (cURus)	3 AWG
Conductor size Field wiring min. (cURus)	10 AWG	Current size B (cURus)	100 A
Current size C (cURus)	100 A	Voltage size B (cURus)	600 V
Voltage size C (cURus)	600 V		

**Material data**

Material	Wemid	Colour	Grey
UL 94 flammability rating	V-0		

**Classifications**

ETIM 3.0	EC001283	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-34	eClass 6.2	27-14-11-34
eClass 7.1	27-14-11-34		

**Notes**

Notes

**Approvals**

Approvals




ROHS

Conform


**OMNIMATE Power - series WGK  
WGK 25/Z**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

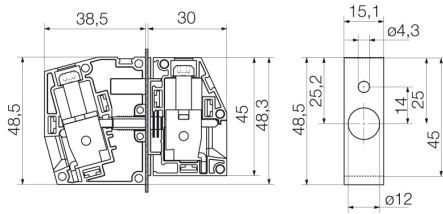

**WGK 25**

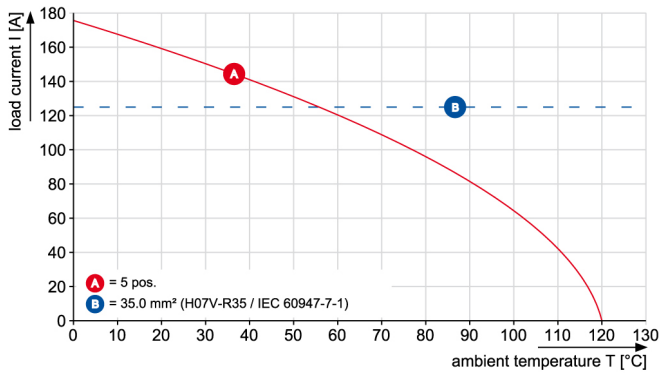

**WGK 25**

