



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




SERIES

1944R & 1945R
1944 & 1945



Molded Unshielded RF Coils

Actual Size

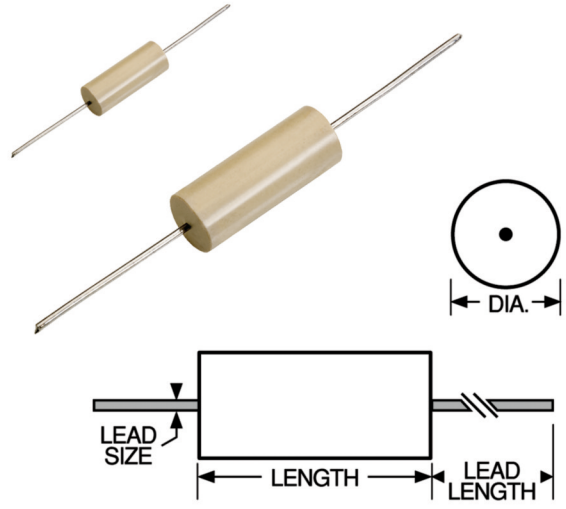

Test Methods MIL-PRF-15305 test methods, only.
MS21389-01 to MS21389-17, reference - 1944 Series
MS21390-01 to MS21390-39, reference - 1945 Series

Physical Parameters

	Inches	Millimeters
Length	0.420 to 0.447	10.67 to 11.35
Diameter	0.168 to 0.193	4.27 to 4.90
Lead Size		
AWG #22 TCW	0.023 to 0.027	0.584 to 0.686
Lead Length	1.30 Min.	33.02 Min.

Current Rating at 90°C Ambient 35°C Rise

Operating Temperature -55°C to +125°C

Maximum Power Dissipation at 90°C

Series 1944: 0.385 W
Series 1945: 0.330 W

Marking DELEVAN; inductance with units and tolerance; date code (YYWWL). Note: An R before the date code indicates a RoHS component.

Example: 1944-14M

Front: DELEVAN 1.2uH±20%
Reverse: 0704A

Packaging Tape & reel: 12" reel, 2500 pieces max.; 14" reel, 3000 pieces max.

Made in the U.S.A.

DASH NUMBER*	MIL DASH # (Ref.)	INDUCTANCE (uH)	TOLERANCE	INDUCTANCE TEST FREQUENCY (MHz)	Q TEST FREQUENCY (MHz)	SRF MINIMUM	Q MINIMUM	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (mA)
--------------	-------------------	-----------------	-----------	---------------------------------	------------------------	-------------	-----------	------------------------------	-----------------------------

MS21389 (Reference) – SERIES 1944 PHENOLIC CORE									
-01M	1	0.10	± 20%	25	50	75	400	0.020	4000
-02M	2	0.12	± 20%	25	50	75	400	0.025	3500
-03M	3	0.15	± 20%	25	50	75	400	0.030	3000
-04M	4	0.18	± 20%	25	50	65	400	0.030	3000
-05M	5	0.22	± 20%	25	50	65	400	0.030	3000
-06M	6	0.27	± 20%	25	45	65	376	0.040	2700
-07M	7	0.33	± 20%	25	40	65	352	0.045	2500
-08M	8	0.39	± 20%	25	40	60	320	0.070	2000
-09M	9	0.47	± 20%	25	25	55	288	0.070	2000
-10M	10	0.56	± 20%	25	25	50	264	0.100	1700
-11M	11	0.68	± 20%	25	25	50	240	0.120	1500
-12M	12	0.82	± 20%	25	25	45	220	0.160	1300
-13M	13	1.00	± 20%	25	20	45	200	0.230	1100
-14M	14	1.20	± 20%	7.9	20	45	176	0.280	1000
-15K	15	1.50	± 10%	7.9	15	45	160	0.380	850
-16K	16	1.80	± 10%	7.9	15	45	144	0.540	720
-17K	17	2.20	± 10%	7.9	15	45	132	0.750	610

MS21390 (Reference) – SERIES 1945 IRON CORE									
-01K	1	2.70	± 10%	7.9	10	55	88	0.11	1600
-02K	2	3.30	± 10%	7.9	10	55	80	0.14	1400
-03K	3	3.90	± 10%	7.9	10	60	76	0.19	1200
-04K	4	4.70	± 10%	7.9	7.9	70	72	0.28	1000
-05K	5	5.60	± 10%	7.9	7.9	65	64	0.34	900
-06K	6	6.80	± 10%	7.9	7.9	65	56	0.43	800
-07K	7	8.20	± 10%	7.9	7.9	60	52	0.56	720
-08K	8	10.0	± 10%	7.9	5.0	60	48	0.67	650
-09K	9	12.0	± 10%	2.5	5.0	65	42.4	0.81	590
-10K	10	15.0	± 10%	2.5	2.5	80	37.6	1.15	500
-11K	11	18.0	± 10%	2.5	2.5	75	34.4	1.40	460
-12K	12	22.0	± 10%	2.5	2.5	75	32.0	1.60	430
-13J	13	27.0	± 5%	2.5	2.5	75	28.8	2.30	360
-14J	14	33.0	± 5%	2.5	2.5	85	25.6	3.30	300
-15J	15	39.0	± 5%	2.5	2.5	80	20.8	3.32	290
-16J	16	47.0	± 5%	2.5	2.5	80	17.6	3.70	275
-17J	17	56.0	± 5%	2.5	2.5	75	15.2	3.99	265
-18J	18	68.0	± 5%	2.5	2.5	75	12.8	4.48	250
-19J	19	82.0	± 5%	2.5	2.5	75	10.4	5.07	235
-20J	20	100	± 5%	2.5	1.5	75	8.00	5.78	220
-21J	21	120	± 5%	0.79	0.79	65	5.76	5.00	170
-22J	22	150	± 5%	0.79	0.79	65	5.36	5.80	164
-23J	23	180	± 5%	0.79	0.79	65	5.04	6.60	158
-24J	24	220	± 5%	0.79	0.79	65	4.72	7.40	155
-25J	25	270	± 5%	0.79	0.79	65	4.48	8.00	150
-26J	26	300	± 5%	0.79	0.79	65	4.24	8.60	145
-27J	27	330	± 5%	0.79	0.79	65	4.00	8.90	142
-28J	28	360	± 5%	0.79	0.79	65	3.76	9.60	137
-29J	29	390	± 5%	0.79	0.79	65	3.60	9.90	135
-30J	30	430	± 5%	0.79	0.79	65	3.44	10.4	131
-31J	31	470	± 5%	0.79	0.79	65	3.20	10.9	128
-32J	32	510	± 5%	0.79	0.79	65	3.04	11.6	124
-33J	33	560	± 5%	0.79	0.79	60	2.88	11.8	123
-34J	34	620	± 5%	0.79	0.79	60	2.80	12.5	120
-35J	35	680	± 5%	0.79	0.79	60	2.72	13.5	115
-36J	36	750	± 5%	0.79	0.79	60	2.64	14.0	113
-37J	37	820	± 5%	0.79	0.79	60	2.48	15.0	110
-38J	38	910	± 5%	0.79	0.79	60	2.40	15.5	107
-39J	39	1000	± 5%	0.79	0.79	60	2.24	16.5	104

Optional Tolerances: K = 10% J = 5% H = 3% G = 2% F = 1%
*Complete part # must include series # PLUS the dash #
For surface finish information, refer to www.delevanfinishes.com