



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



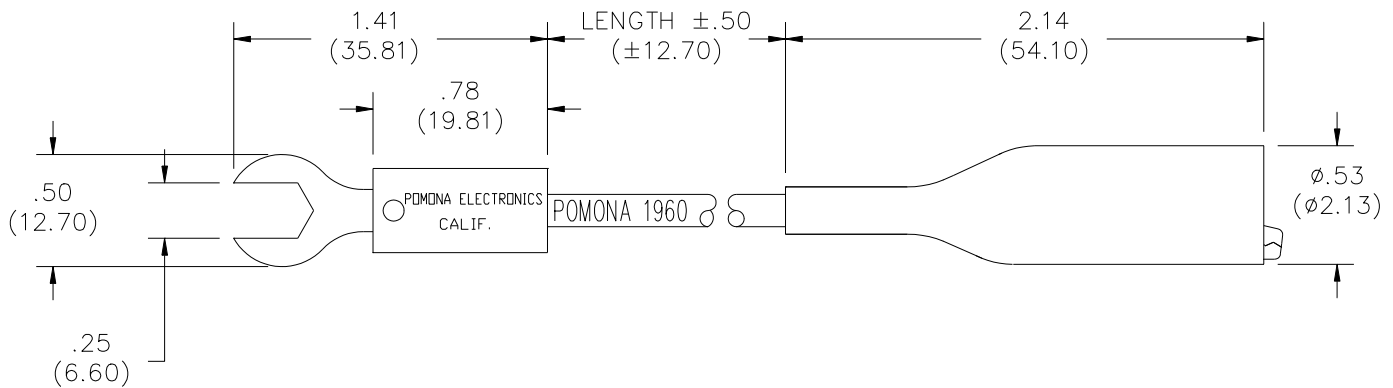

FEATURES:

- Spade lug attaches securely to a screw terminal while the medium size alligator test clip can quickly grab onto terminal points.
- Spade lug and alligator bodies are nickel plating for tarnish resistance
- The alligator features a flex boot for insulation protection.
- Alligators clip has .187" (4.75mm) max. jaw opening.

MATERIALS:

Alligator: Body: Steel, Nickel Plated

Spring: Stainless Steel

Flex Boot: Vinyl

Wire: 18 AWG, Stranding: 65 X 36 tinned copper, PVC Insulation, .144" (3.66 mm) O.D.

Marking: "POMONA 1960-XX"

Spade Lug: Body: Brass, Nickel Plated

Insulation: Polypropylene molded to the spade lug and wire. Color matches wire.

RATINGS:

Operating Voltage: 150 VRMS

Current: 5 Amperes

Operating Temperature: +50°C (+122°F)

ORDERING INFORMATION: Model 1960-XX-*

XX = Length in inches

Standard Lengths: 36" (91.44cm),

- = Color of Flex Boot and Wire, -0 Black, -2 Red
- Additional lengths and colors can be quoted upon request.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA