



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



INTERNATIONAL RECTIFIER



# 1N2054, 1N3735 SERIES

## 250 Amp Avg Power Silicon Rectifier Diodes

### Major Ratings and Characteristics



	1N2054	1N3735	Units
$I_{F(AV)}$	250*	250*	A
@ Max. $T_C$	135*	130*	$^{\circ}C$
$I_{FSM}$ @ 50 Hz	4300	4300	A
@ 60 Hz	4500*	4500*	
$I^2t$ @ 50 Hz	92500	92500	$A^2s$
@ 60 Hz	84500	84500	
$I^2\sqrt{t}$	1300000	1300000	$A^2\sqrt{s}$
$V_{RRM}$ Range	50*-1000*	100*-1200*	V

\*JEDEC registered values.

### Description and Features

- Popular DO-9 package
- Voltage ratings from 50 to 1200 volts

### CASE STYLE AND DIMENSIONS

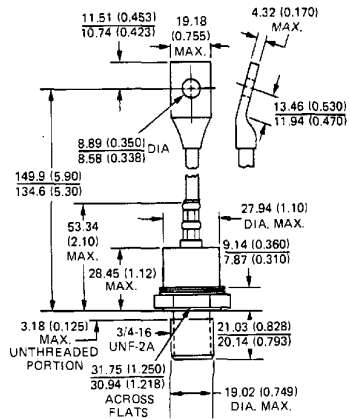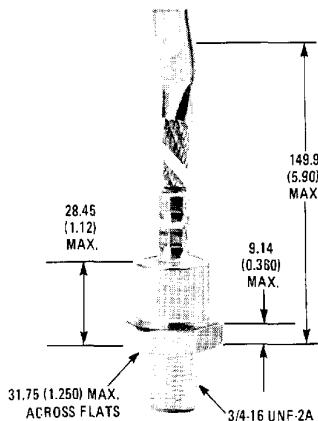

Conforms to JEDEC outline DO-205AB (DO-9) (IR B-13)  
 Dimensions in Millimeters and (Inches)  
 Refer to page B-78 for additional case style.

**VOLTAGE RATINGS**

Part Number		$V_{RRM}$ - Max. Repetitive Peak Reverse Voltage (V)	$V_{RSM}$ - Max. Non-repetitive Peak Reverse Voltage $t_p \leq 5$ ms (V)	$V_R$ - Max. Direct Reverse Voltage (V)	$I_{R(AV)}$ Max. Average Reverse Current @ Max. Rated $I_F(AV)$ and $V_{RRM}$ 1 Phase Operation (mA)
Cathode-to-Stud	Anode-to-Stud	$T_C = -65$ to $200^\circ\text{C}$		$T_C = -65$ to $200^\circ\text{C}$	$T_C = 135^\circ\text{C}$
1N2054	1N2054R	50*	—	40*	25*
1N2055	1N2055R	100*	—	80*	25*
1N2057	1N2057R	200*	—	160*	17*
1N2059	1N2059R	300*	—	240*	17*
1N2061	1N2061R	400*	—	320*	17*
1N2064	1N2064R	600*	—	480*	17*
1N2066	1N2066R	800*	—	640*	16*
1N2067	1N2067R	900*	—	720*	14*
1N2068	1N2068R	1000*	—	800*	12*
		$T_C = -40$ to $200^\circ\text{C}$	$T_C = 25$ to $200^\circ\text{C}$	$T_C = -40$ to $200^\circ\text{C}$	$T_C = 130^\circ\text{C}$
1N3735	1N3735R	100*	200*	100*	16*
1N3736	1N3736R	200*	300*	200*	16*
1N3737	1N3737R	300*	400*	300*	16*
1N3738	1N3738R	400*	525*	400*	16*
1N3739	1N3739R	500*	650*	500*	13*
1N3740	1N3740R	600*	800*	600*	12*
1N3741	1N3741R	800*	1050*	800*	9*
1N3742	1N3742R	1000*	1300*	1000*	7*
1N3743	1N3743R	1200*	1600*	1200*	7*

**ELECTRICAL SPECIFICATIONS**

	1N2054	1N3735	Units	Conditions
$I_F(AV)$ Max. average forward current	250*	250*	A	1 phase operation, $180^\circ$ conduction 1N2050 series: max. $T_C = 135^\circ\text{C}$ 1N3735 series: max. $T_C = 130^\circ\text{C}$
$I_{FSM}$ Max. peak one-cycle non-repetitive surge current	4300	4300	A	Half cycle 50 Hz sine wave or 6 ms rectangular pulse Following any rated load condition and with rated $V_{RRM}$ applied
	4500*	4500*		Half cycle 60 Hz sine wave or 5 ms rectangular pulse Following any rated load condition and with $V_{RRM}$ applied
	5100	5100		Half cycle 50 Hz sine wave or 6 ms rectangular pulse Following any rated load condition and with $V_{RRM}$ applied
	5350	5350		Half cycle 60 Hz sine wave or 5 ms rectangular pulse Following any rated load condition and with $V_{RRM}$ applied following surge = 0.
$I^2t$ Max. $I^2t$ for fusing	92,500	92,500	$A^2s$	$t = 10$ ms With rated $V_{RRM}$ applied following surge, initial $T_J = 200^\circ\text{C}$
	84,500	84,500		$t = 10$ ms With $V_{RRM} = 0$ following surge, initial $T_J = 200^\circ\text{C}$
	130,000	130,000		$t = 8.3$ ms
Max. $I^2t$ for individual device fusing	120,000	120,000		$t = 0.1$ to $10$ ms, $V_{RRM} = 0$ following surge.
$I^2 \sqrt{t}$ Max. $I^2 \sqrt{t}$ for individual device fusing	1,300,000	1,300,000	$A^2 \sqrt{s}$	
$V_{FM}$ Max. peak forward voltage	1.25*	—	V	$I_F(AV) = 250A$ (785A peak), $T_C = 135^\circ\text{C}$ *
	—	1.3*	V	$I_F(AV) = 250A$ (785A peak), $T_C = 130^\circ\text{C}$ *

**THERMAL-MECHANICAL SPECIFICATIONS**

$T_C$ Max. operating case temperature range	$-65^\circ$ to $200^\circ$	$-40^\circ$ to $200^\circ$	$^\circ\text{C}$	
$T_{stg}$ Max. storage temperature range	$-65^\circ$ to $200^\circ$	$-40^\circ$ to $200^\circ$	$^\circ\text{C}$	
$R_{thJC}$ Max. internal thermal resistance, junction-to-case	0.18*	0.18*	deg C/W	DC operation.
	—	0.24*		One- and three-phase operation.
	—	0.30*		Six-phase operation.
$R_{thCS}$ Thermal resistance, case-to-sink	0.08	0.08	deg C/W	Mounting surface flat, smooth and greased.
$T$ Mounting torque	31.1–36.7 (275–325)		N•m (lbf•in.)	
wt Approximate weight	213 (7.5)		g (oz)	
Case Style	DO-205AB (DO-8) (IR B-13)			JEDEC

\* JEDEC registered values.

① 1N3743,R may be furnished in DO-9 (IR B-6) package.

②  $I^2t$  for time  $t_x = I^2 \sqrt{t} \cdot \sqrt{t_x}$ .

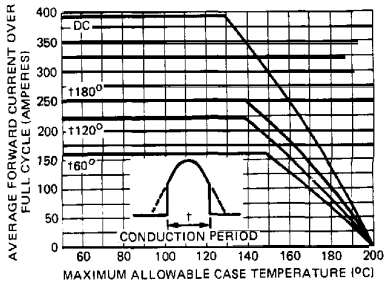


Fig. 1 – Average Forward Current Vs. Maximum Allowable Case Temperature (Sinusoidal Current Waveform)

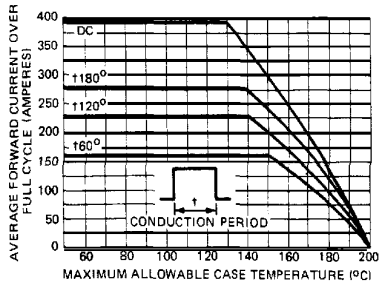


Fig. 2 – Average Forward Current Vs. Maximum Allowable Case Temperature (Rectangular Current Waveform)

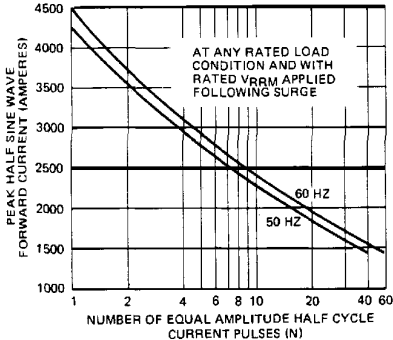


Fig. 3 – Maximum Non-Repetitive Surge Current Vs. Number of Current Pulses

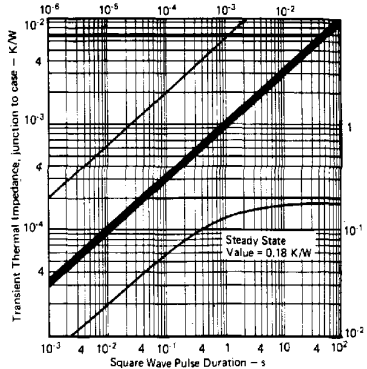


Fig. 4 – Maximum Transient Thermal Impedance, Junction-to-Case Vs. Pulse Duration

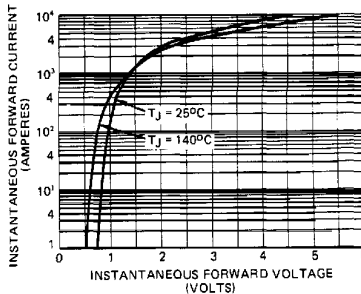


Fig. 5 – Maximum Forward Voltage Vs. Forward Current

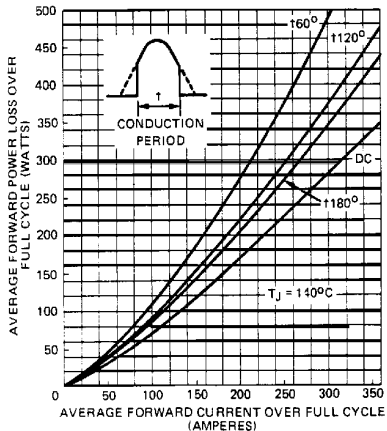


Fig. 6 – Maximum Low Level Forward Power Loss Vs. Average Forward Current (Sinusoidal Current Waveform)

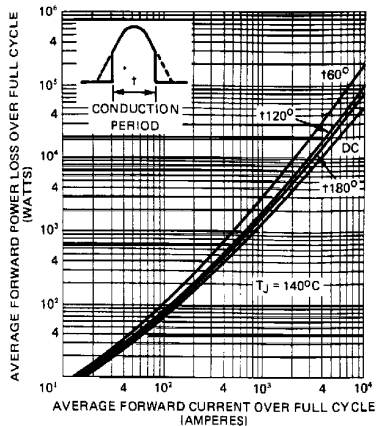


Fig. 7 – Maximum High Level Forward Power Loss Vs. Average Forward Current (Sinusoidal Current Waveform)

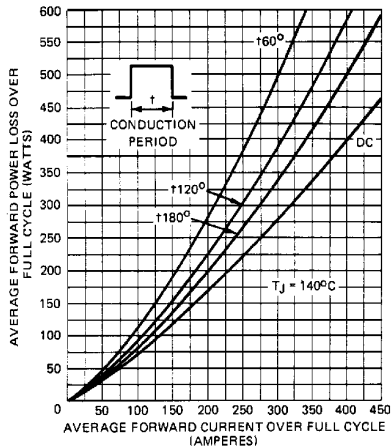


Fig. 8 – Maximum Low Level Forward Power Loss Vs. Average Forward Current (Rectangular Current Waveform)


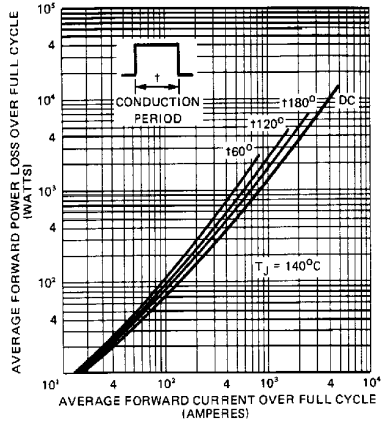


Fig. 9 – Maximum High Level Forward Power Loss Vs. Average Forward Current (Rectangular Current Waveform)

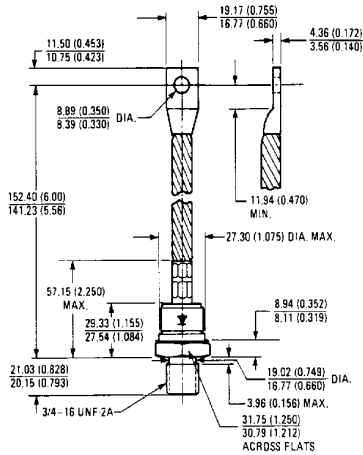

Conforms to JEDEC outline DO-205AB (DO-9) (IR B-6)  
All Dimensions in Millimeters and (Inches)