



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

**General Purpose  
Rectifier**  
100 Amperes Average  
1400 Volts

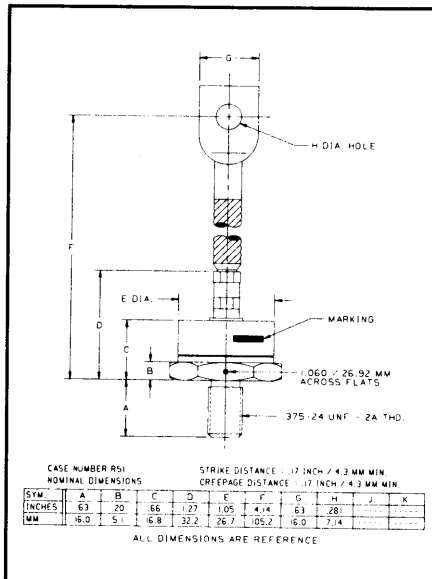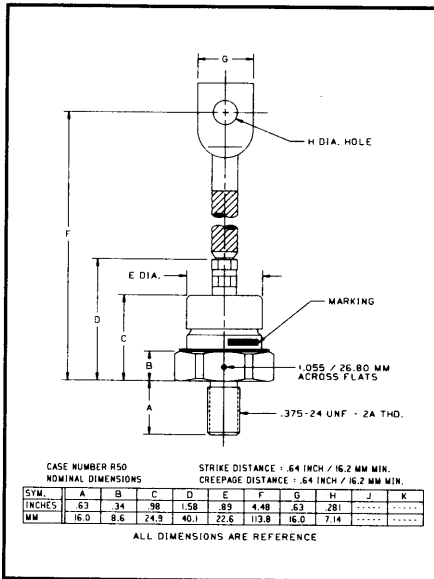

IN3288A, AR - IN3297A, AR (Outline Drawing)

### Ordering Information:

Select the complete part number you desire from the following table:

| Type    | Voltage  | Current                   |
|---------|--|---------------------------|
|         | V <sub>DRM</sub> & V <sub>RRM</sub><br>(Volts) | I <sub>F(av)</sub><br>(A) |
| IN3288A | 100  | 100                       |
| IN3289A | 200  |                           |
| IN3290A | 300  |                           |
| IN3291A | 400  |                           |
| IN3292A | 500  |                           |
| IN3293A | 600  |                           |
| IN3294A | 800  |                           |
| IN3295A | 1000   |                           |
| IN3296A | 1200   |                           |
| IN3297A | 1400   |                           |

### Features:

- Standard and Reverse Polarities with Color Coded Seals
- High Surge Current Ratings
- Electrical Selection for Parallel and Series Operation
- Compression Bonded Encapsulation

### Applications:

- Welders
- Battery Chargers
- Electrochemical Refining
- Metal Reduction
- General Industrial High Current Rectification

IN3288A, AR - IN3297A, AR  
General Purpose Rectifier  
100 Amperes Average, 1400 Volts



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

IN3288A, AR - IN3297A, AR  
 General Purpose Rectifier  
 100 Amperes Average, 1400 Volts

### Absolute Maximum Ratings

| Characteristics                                     | Symbol       | IN3288A,AR - IN3297A,AR | Units              |
|---|--------------|-------------------------|--------------------|
| RMS Forward Current                                 | $I_{F(rms)}$ | 160                     | Amperes            |
| Average Forward Current                             | $I_{F(av)}$  | 100                     | Amperes            |
| One-half Cycle Surge Current (at 60 Hz, Under Load) | $I_{FSM}$    | 2300                    | Amperes            |
| $i^2t$ (for Fusing) at 60 Hz Half-Wave              | $i^2t$       | 22000                   | A <sup>2</sup> sec |
| Storage Temperature                                 | $T_{stg}$    | -40 to +200             | °C                 |
| Operating Temperature                               | $T_j$        | -40 to +200             | °C                 |
| Mounting Torque (Lubricated)                        |              | 120                     | in-lb              |

### Electrical and Thermal Characteristics

| Characteristics   | Symbol            | IN3288A | IN3289A* | IN3290A | IN3291A* | IN3292A          | IN3293A | IN3294A* | IN3295A* | IN3296A | IN3297A | Units   |
|---|-------------------|---------|----------|---------|----------|------------------|---------|----------|----------|---------|---------|---------|
| <b>Current - Conducting State Maximums, <math>T_j = 200^\circ\text{C}</math></b>                    |                   |         |          |         |          |                  |         |          |          |         |         |         |
| Forward Voltage Drop at 100A Average, $T_C = 130^\circ\text{C}$ , Peak Volts                        | $V_{FM}$          |         |          |         |          | 1.5 (All Types)  |         |          |          |         |         | Volts   |
| <b>Voltage - Blocking State Maximums</b>  |                   |         |          |         |          |                  |         |          |          |         |         |         |
| Repetitive Peak Reverse Voltage   | $V_{RRM}$         | 100     | 200      | 300     | 400      | 500              | 600     | 800      | 1000     | 1200    | 1400    | Volts   |
| Non-rep. Trans. Peak Rev. Voltage   | $V_{RSM}$         | 200     | 300      | 400     | 525      | 650              | 800     | 1050     | 1300     | 1600    | 1800    | Volts   |
| Maximum Allowable DC Blocking Voltage   | $V_R$             | 100     | 200      | 300     | 400      | 500              | 600     | 800      | 1000     | 1200    | 1400    | Volts   |
| Reverse Leakage Current, at Rated $V_{RRM}$ , 100A Average, Single Phase, $T_C = 130^\circ\text{C}$ | $I_{RRM}$         | 24      | 24       | 24      | 24       | 21               | 17      | 13       | 11       | 9       | 7       | mA      |
| <b>Thermal</b>  |                   |         |          |         |          |                  |         |          |          |         |         |         |
| Maximum Resistance, Junction to Case  | $R_{\theta(j-c)}$ |         |          |         |          | 0.40 (All Types) |         |          |          |         |         | °C/Watt |
| Maximum Resistance, Case to Sink (Lubricated)   | $R_{\theta(c-s)}$ |         |          |         |          | 0.15 (All Types) |         |          |          |         |         | °C/Watt |

\*Available as JAN types

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

IN3288A, AR - IN3297A, AR  
 General Purpose Rectifier  
 100 Amperes Average, 1400 Volts

### Electrical Characteristics

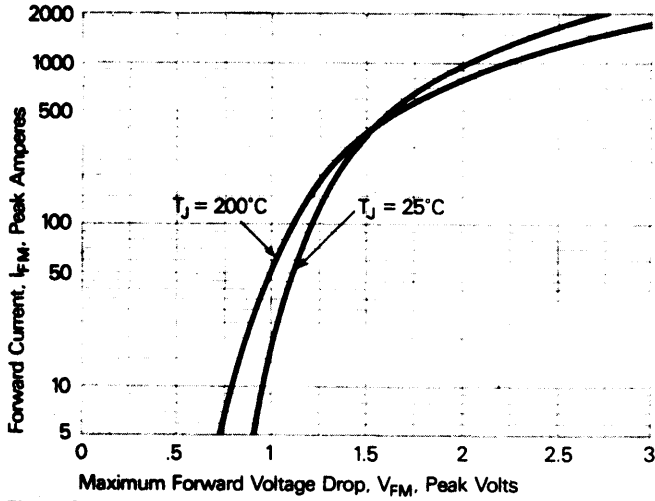


Figure 1. Forward Current vs. Forward Voltage.

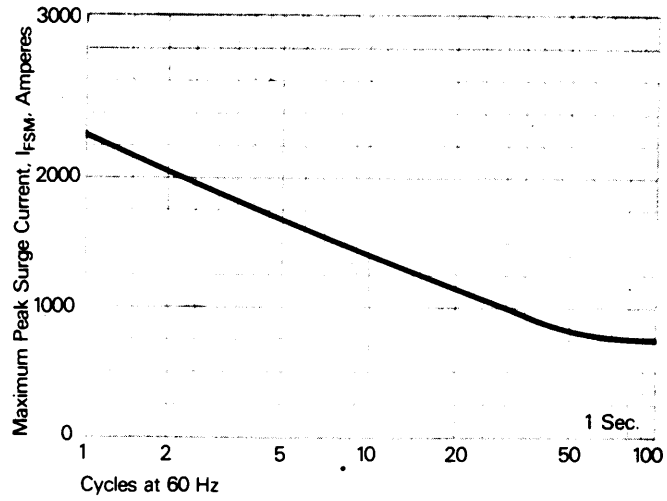


Figure 2. Maximum allowable surge current at rated load conditions.

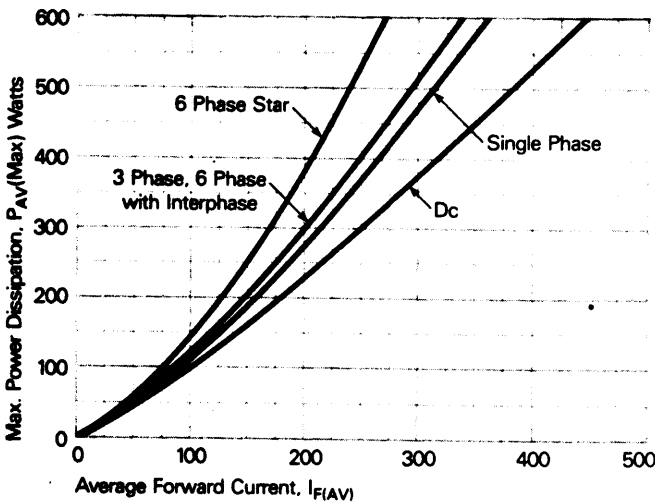


Figure 3. Power dissipation vs. Average forward current.

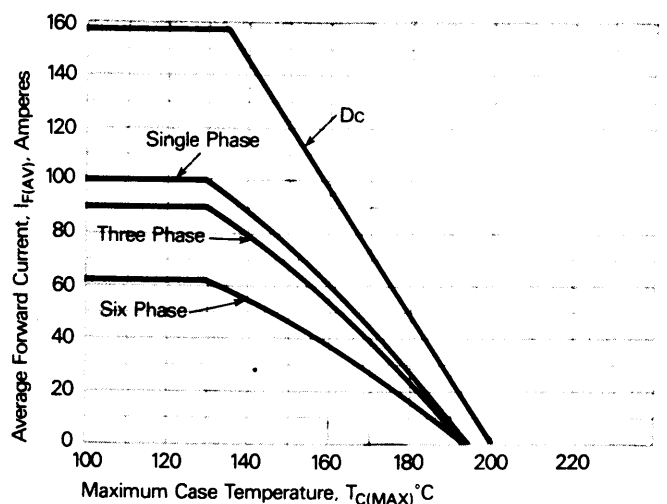


Figure 4. Forward Current vs. Case Temperature.

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272  
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

IN3288A, AR - IN3297A, AR  
General Purpose Rectifier  
100 Amperes Average, 1400 Volts

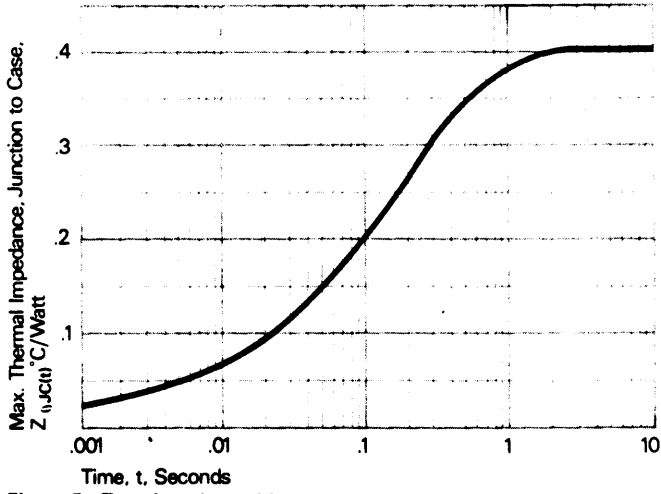


Figure 5. Transient thermal impedance vs. time.