



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

## AXIAL LEADED HERMETICALLY SEALED HIGH VOLTAGE STANDARD RECOVERY RECTIFIER DIODE

## QUICK REFERENCE DATA


- High thermal shock resistance
- Hermetically sealed with Metoxillite fused metal oxide
- Multi-junction construction
- Low reverse leakage currents
- Subminiature body size

- $V_R = 2kV - 3kV$
- $I_F = 600mA$
- $t_{rr} = 2.5\mu S$
- $I_R = 1.0\mu A$

### ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	1N3645 SM20	1N3646 SM25	1N3647 SM30	Unit
Working reverse voltage	$V_{RWM}$	2000	2500	3000	V
Repetitive reverse voltage	$V_{RRM}$	2000	2500	3000	V
Average forward current (@ 55°C in oil)	$I_{F(AV)}$	← 600 →			mA
Repetitive surge current (@ 55°C in oil, lead length 0.375")	$I_{FRM}$	← 2.5 →			A
Non-repetitive surge current ( $t_p = 8.3ms$ , @ $V_R$ & $T_{jmax}$ )	$I_{FSM}$	← 14 →			A
Storage temperature range	$T_{STG}$	← -65 to +175 →			°C
Operating temperature range	$T_{OP}$	← -65 to +175 →			°C

### MECHANICAL

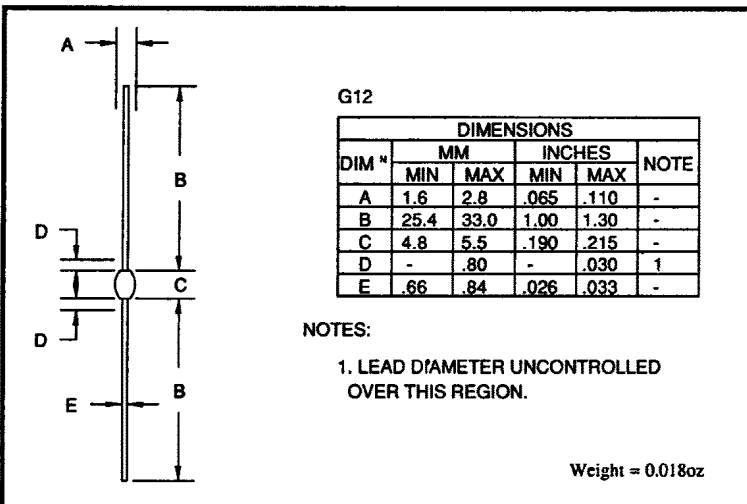

These products are qualified to MIL-S-19500/279 and are preferred parts as listed in MIL-STD-701. They can be supplied fully released as JAN and JANTX versions.

These products are available in Europe to DEF STAN 59-61 (PART 80)/034.

January 7, 1998

**CHARACTERISTICS** (@ 25°C unless otherwise specified)

	Symbol	1N3645 SM20	1N3646 SM25	1N3647 SM30	Unit
Average forward current for sine wave - max. pcb mounted	$I_{F(AV)}$	← 260 →			mA
- max. in unstirred oil	$I_{F(AV)}$	← 600 →			mA
$I^2t$ for fusing (t = 8.3ms) max.	$I^2t$	← 0.026 →			A <sup>2</sup> S
Forward voltage drop max. @ $I_F = 250mA$ , $T_j = 25^\circ C$	$V_F$	← 5.00 →			V
Reverse current max. @ $V_{RWM}$ , $T_j = 25^\circ C$	$I_R$	← 1.00 →			μA
@ $V_{RWM}$ , $T_j = 100^\circ C$	$I_R$	← 20.0 →			μA
Reverse recovery time max. 50mA $I_F$ to 100mA $I_R$ . Recover to 25mA $I_{RR}$ .	$t_{rr}$	← 2.5 →			μS
Junction capacitance typ. @ $V_R = 5V$ , $f = 1MHz$	$C_j$	← 8.0 →			pF
Thermal resistance - junction to oil Unstirred @ 55°C	$R_{\theta JO}$	← 30.0 →			°C/W
Stirred @ 55°C	$R_{\theta JO}$	← 18.0 →			°C/W
Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper.	$R_{\theta JA}$	← 90.0 →			°C/W

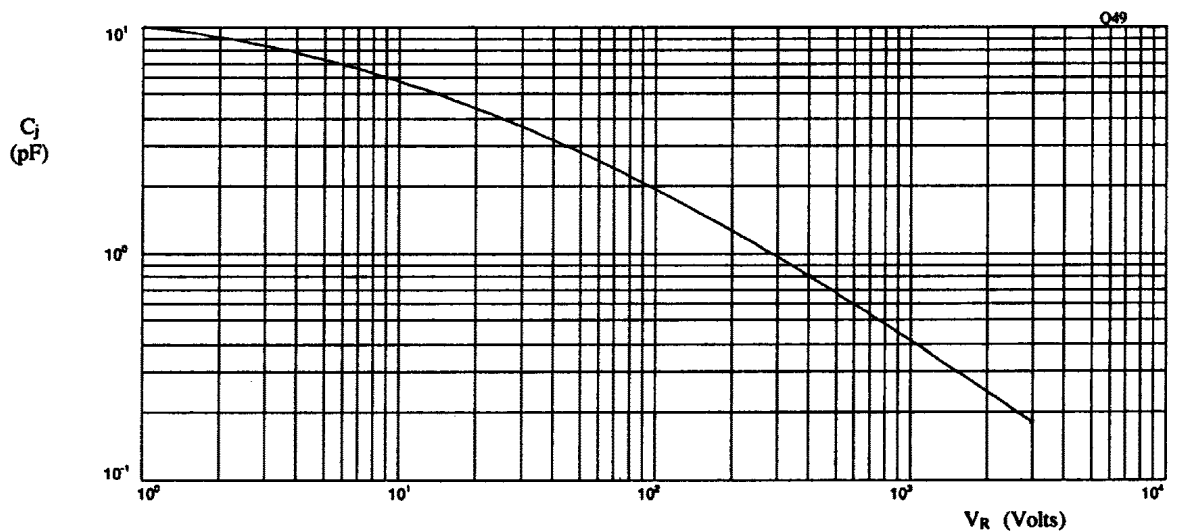


Fig 1. Typical junction capacitance as a function of reverse voltage.



January 7, 1998

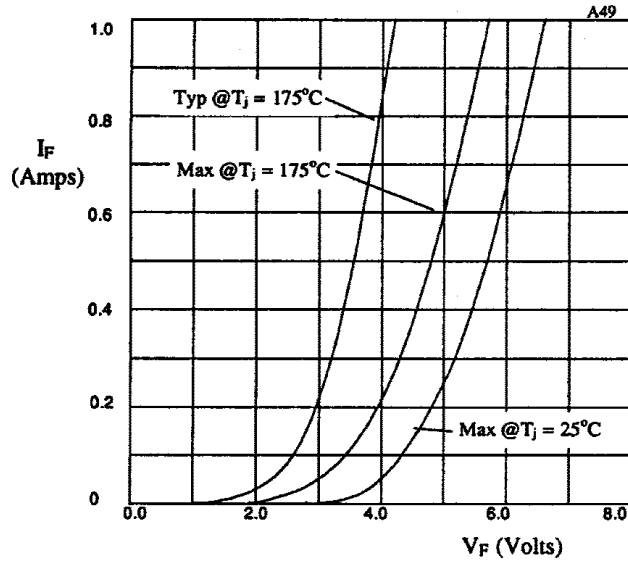


Fig 2. Forward voltage drop as a function of forward current.

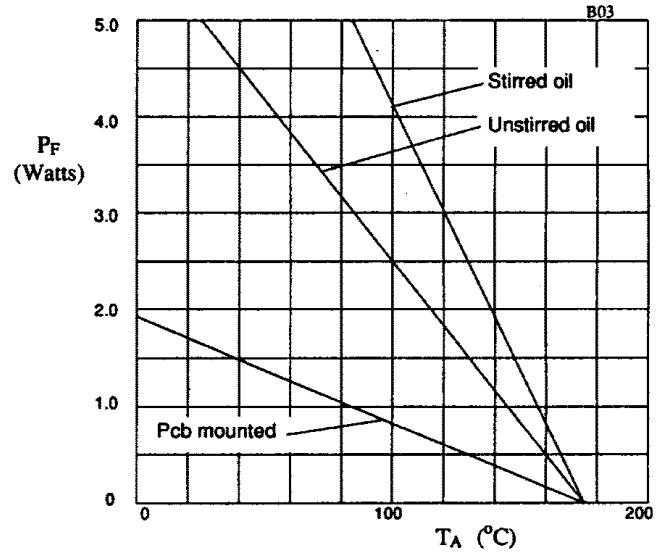


Fig 3. Power derating in oil and air.

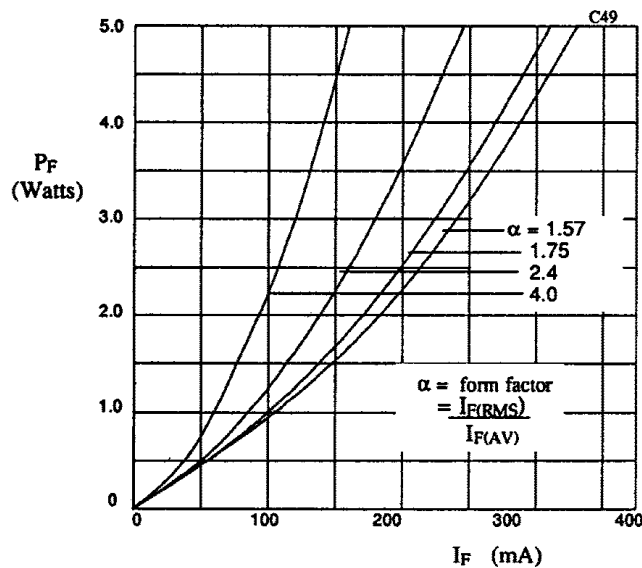


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

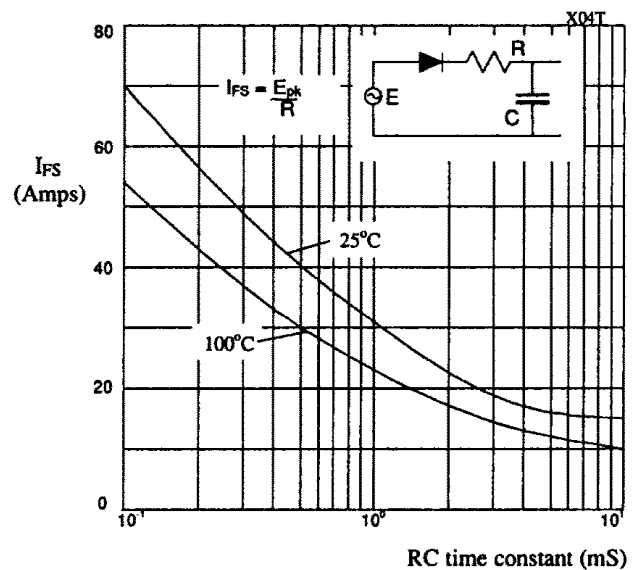


Fig 5. Maximum ratings for capacitive loads.