# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





#### 1N4942, 1N4944, 1N4946, 1N4947, 1N4948 Axial Leaded Hermetically Sealed Fast Recovery Rectifier Diodes

# POWER DISCRETES

#### Description

Quick reference data

 $V_{R} = 200 - 1000 V$   $I_{0} = 1.0A$   $t_{rr} = 150 \text{ to } 500 \text{ nS}$  $V_{F} = 1.2V$ 

#### Features

- Low reverse leakage current
- Hermetically sealed in Metoxilite fused metal oxide
- Low forward voltage drop

These products are qualified to MIL-PRF-19500/359

#### **Electrical Specifications**

Electrical specifications @  $T_{A} = 25 \,^{\circ}C$  unless otherwise specified.

Types	V <sub>RWM</sub>	l <sub>⊧</sub> (AV) @ 55°C		I <sub>fsm</sub>	I <sub>FRM</sub> @ tp=8.3ms	T <sub>RR</sub>	V <sub>F</sub> (	@ I <sub>F</sub>	I <sub>R</sub> @ V <sub>RWM</sub>		C <sub>,</sub> @ 5V 1MHz	Т <sub>stg</sub>	RθjL	
		-pcb mid	L = 3/8"						25°C	100°C			3/8"	0"
	V(pk)	A	А	А	A	ns	V	Α	μA	μA	pF	°C	C/W°C	C/W°C
1N4942	200	1.0	2.0	25	6.0	150	1.2	1.0	0.5	25	27	-65 to +175	3	7
1N4944	400	1.0	2.0	25	6.0	150	1.2	1.0	0.5	25	27	-65 to +175	3	7
1N4946	600	1.0	2.0	25	6.0	250	1.2	1.0	0.5	25	27	-65 to +175	3	7
1N4947	800	1.0	2.0	25	6.0	250	1.2	1.0	0.5	25	18	-65 to +175	3	7
1N4948	1000	1.0	2.0	25	6.0	500	1.2	1.0	0.5	25	18	-65 to +175	3	7



# POWER DISCRETES


# Ordering Information

Part Number	Description
1N4942	
1N4944	
1N4946	Axial leaded hermetically sealed <sup>(1)</sup>
1N4947	
1N4948	

Note:

(1) Available in bulk or tape and reel packaging. Please consult factory for quantities.

#### **Outline Drawing**

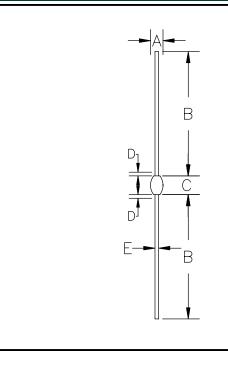

G2									
DIMENSIONS									
	М	Μ	INC	NOTE					
	MIN	MAX	MIN	MAX	NOIL				
A	1.6	2.8	.065	.110	—				
В	25.4	33.0	1.00	1.30	—				
С	3.5	4.2	.140	.165	—				
D	_	.80	—	.030	1				
E	.66	.84	.026	.033	—				

#### NOTE:

1. LEAD DIAMETER UNCONTROLLED OVER THIS REGION.

# **Contact Information**

Semtech Corporation Power Discretes Products Division 200 Flynn Road, Camarillo, CA 93012 Phone: (805)498-2111 FAX (805)498-3804