



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





6 Lake Street, Lawrence, MA 01841
1-800-446-1158 / (978) 620-2600 / Fax: (978) 689-0803
Website: <http://www.microsemi.com>

TECHNICAL DATA SHEET

HIGH RELIABILITY ULTRA FAST RECOVERY RECTIFIER

Qualified per MIL-PRF-19500/550

- 800 Amps Surge Rating
- VRRM 50 to 150 Volts
- 70 Amps Current Rating

DEVICES

1N6304 **1N6304R**
1N6305 **1N6305R**
1N6306 **1N6306R**

LEVELS
JAN
JANTX
JANTXV


ABSOLUTE MAXIMUM RATINGS ($T_C = +25^\circ\text{C}$ unless otherwise noted)

Parameters / Test Conditions	Symbol	Value	Unit
Peak Repetitive Reverse Voltage 1N6304 / R 1N6305 / R 1N6306 / R	V_{RWM}	50 100 150	V
Peak Working Reverse Voltage 1N6304 / R 1N6305 / R 1N6306 / R	V_{RRM}	50 100 150	V
Average Forward Current, $T_C = 100^\circ$	I_F	70	A
Peak Surge Forward Current @ $t_p = 8.3\text{ms}$, half sinewave, $T_C = 55^\circ\text{C}$	I_{FSM}	800	A
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.8	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-65°C to 175°C	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-65°C to 175°C	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, unless otherwise noted)

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Forward Voltage $I_{FM} = 70\text{A}$, $T_C = 25^\circ\text{C}^*$	V_{FM}		0.975	V
Forward Voltage $I_{FM} = 150\text{A}$, $T_C = 25^\circ\text{C}^*$	V_{FM}		1.18	V
Forward Voltage $I_{FM} = 70\text{A}$, $T_C = 150^\circ\text{C}^*$	V_{FM}		0.84	V
Reverse Current $V_{RM} = 50\text{V}$, $T_C = 25^\circ\text{C}$ $V_{RM} = 100\text{V}$, $T_C = 25^\circ\text{C}$ $V_{RM} = 150\text{V}$, $T_C = 25^\circ\text{C}$ 1N6304 / R 1N6305 / R 1N6306 / R	I_{RM}		25	μA
Reverse Current $V_{RM} = 50\text{V}$, $T_C = 150^\circ\text{C}$ $V_{RM} = 100\text{V}$, $T_C = 150^\circ\text{C}$ $V_{RM} = 150\text{V}$, $T_C = 150^\circ\text{C}$ 1N6304 / R 1N6305 / R 1N6306 / R	I_{RM}		30	mA
Reverse Recovery Time $I_F = 0.5\text{A}$, $I_R = 1\text{A}$	T_{rr}		50	ns
Reverse Recovery Time $I_F = 70\text{A}$	T_{rr}		60	ns
Capacitance Junction $V_R = 10\text{V}$, $f = 1\text{MHz}$, $T_J = 25^\circ\text{C}$	C_J		600	pF

* Pulse test: Pulse width 300 μsec , Duty cycle 2%



DO-203AB (DO-5)

HIGH RELIABILITY ULTRA FAST RECOVERY RECTIFIER

GRAPHS

FIGURE 1
TYPICAL FORWARD CHARACTERISTICS

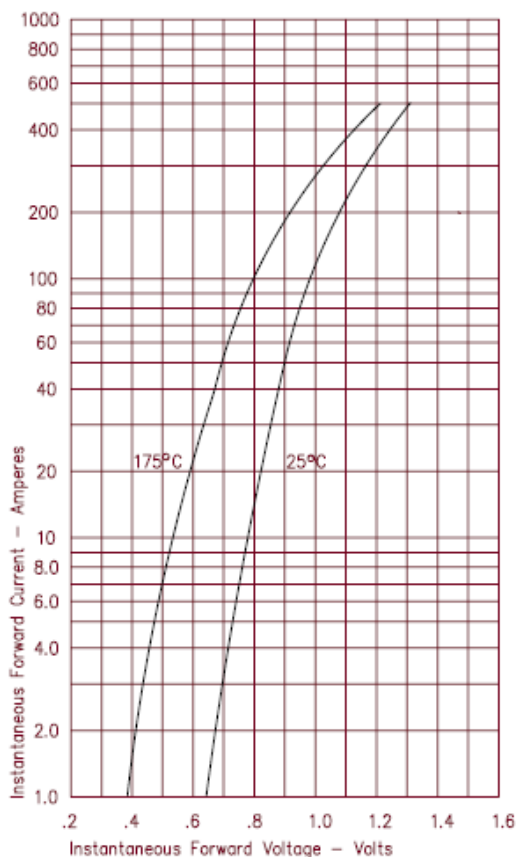


FIGURE 3
TYPICAL JUNCTION CAPACITANCE

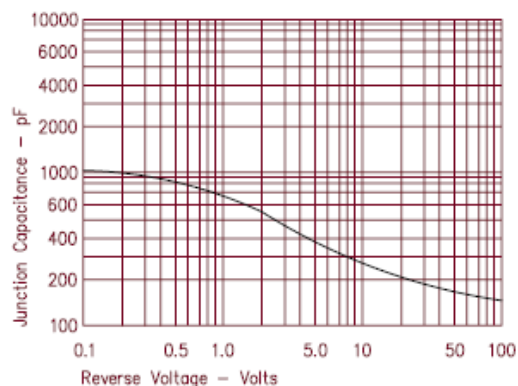


FIGURE 4
FORWARD CURRENT DERATING



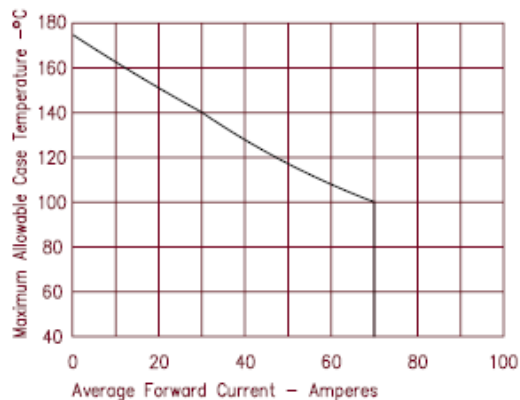


FIGURE 2
TYPICAL REVERSE CHARACTERISTICS

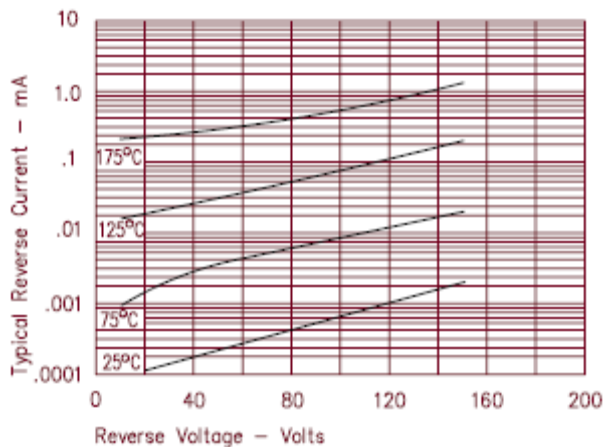

HIGH RELIABILITY ULTRA FAST RECOVERY RECTIFIER

PACKAGE DIMENSIONS

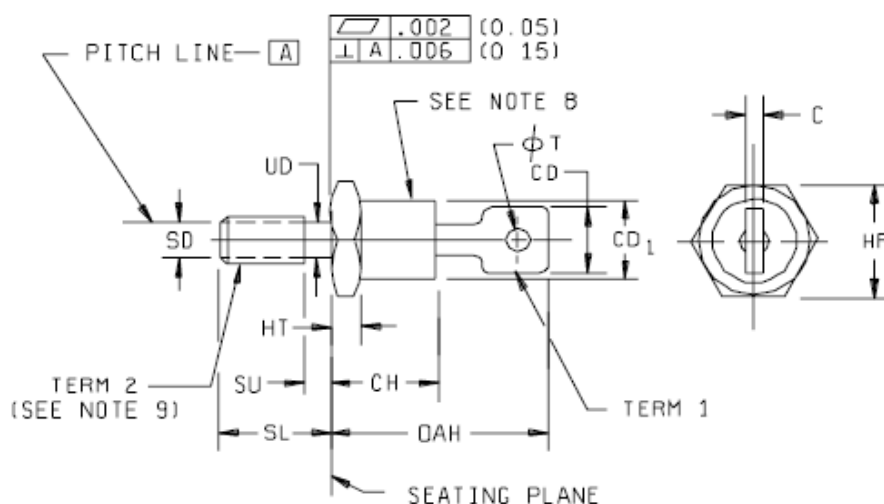

NOTES:

- 1 Dimensions are in inches.
- 2 Millimeter equivalents are given for information only.
- 3 Units must not be damaged by torque of 30 inch-pound applied to .25-28 UNF-2B nut assembled on thread.
- 4 Length of incomplete or undercut threads of UD.
- 5 Maximum pitch diameter of plated threads shall be basic pitch diameter .2268 inch (5.761 mm).
- 6 A chamfer or undercut on one or both ends of the hex portion is optional; minimum base diameter at seating plane .60 inch (15.2 mm).
- 7 The angular orientation and peripheral configuration of terminal 1 is undefined.
- 8 Standard types shall have cathode connected to stud. Reverse types shall have anode connected to stud.
- 9 Term 2 threads in accordance with FED-STD-H28.
- 10 In accordance with ASME Y14.5M, diameters are equivalent to ϕ x symbology.

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD		.375		9.53	7
C		.080		2.03	
HF	.669	.688	16.99	17.48	
HT	.115	.200	2.92	5.08	
CH		.450		11.43	
OAH	.750	1.00 0	19.05	25.40	
SL	.422	.453	10.72	11.51	
SU		.090		2.29	4
CD ₁		.667		16.94	
SD					5
UD	.220	.249	5.59	6.32	
θT	.140	.175	3.56	4.45	

Physical dimensions (DO-203AB)