



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




**VOIDLESS-HERMETICALLY-SEALED
ULTRA FAST RECOVERY GLASS
RECTIFIERS**

ALSO
AVAILABLE IN
SURFACE
MOUNT

DESCRIPTION

This "Ultrafast Recovery" rectifier diode series is military qualified to MIL-PRF-19500/590 and is ideal for high-reliability applications where a failure cannot be tolerated. These industry-recognized 2.0 to 4.0 Amp rated rectifiers for working peak reverse voltages from 200 to 1000 volts are hermetically sealed with voidless-glass construction using an internal "Category I" metallurgical bond. These devices are also available in surface mount MELF package configurations by adding a "US" suffix (see separate data sheet for 1N6626US thru 1N6631US). Microsemi also offers numerous other rectifier products to meet higher and lower current ratings with various recovery time speed requirements including standard, fast and ultrafast device types in both through-hole and surface mount packages.

APPEARANCE



IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

FEATURES

- Popular JEDEC registered 1N6626 to 1N6631 series
- Voidless hermetically sealed glass package
- Extremely robust construction
- Triple-layer passivation
- Internal "Category I" Metallurgical bonds
- JAN, JANTX, and JANTXV available per MIL-PRF-19500/590
- Further options for screening in accordance with MIL-PRF-19500 for JANS by using a "SP" prefix, e.g. SP6626, SP6629, etc.
- Surface mount equivalents also available in a square end-cap MELF configuration with "US" suffix (see separate data sheet for 1N6626US thru 1N6631US)

APPLICATIONS / BENEFITS

- Ultrafast recovery rectifier series 200 to 1000 V
- Military and other high-reliability applications
- Switching power supplies or other applications requiring extremely fast switching & low forward loss
- High forward surge current capability
- Low thermal resistance
- Controlled avalanche with peak reverse power capability
- Inherently radiation hard as described in Microsemi MicroNote 050

MAXIMUM RATINGS

- Junction Temperature: -65°C to +150°C
- Storage Temperature: -65°C to +175°C
- Peak Forward Surge Current @ 25°C: 75A (except 1N6631 which is 60A)
Note: Test pulse = 8.3ms, half-sine wave.
- Average Rectified Forward Current (I_O) at $T_L = +75^\circ\text{C}$ ($L = .375$ inch from body):

1N6626 thru 1N6628	2.3 A
1N6629 thru 1N6631	1.8 A

 (Derate I_O linearly at 1.0%/°C for $T_L > +75^\circ\text{C}$)
- Average Rectified Forward Current (I_O) at $T_A = 25^\circ\text{C}$:

1N6626 thru 1N6628	1.75 A
1N6629 thru 1N6631	1.40 A

 (Derate I_O linearly at 0.80%/°C for $T_A > +25^\circ\text{C}$. This I_O rating is typical for PC boards where thermal resistance from mounting point to ambient is sufficiently controlled where $T_{J(\text{max})}$ is not exceeded. See MIL-PRF-19500/590)
- Thermal Resistance $L = 0.375$ inch ($R_{\theta JL}$): 22°C/W
- Capacitance at $V_R = 10$ V: 40 pF
- Solder temperature: 260°C for 10 s (maximum)

MECHANICAL AND PACKAGING

- CASE: Hermetically sealed voidless hard glass with Tungsten slugs
- TERMINATIONS: Axial-leads are Tin/Lead (Sn/Pb) over Copper.
- MARKING: Body painted and part number, etc.
- POLARITY: Cathode indicated by band
- Tape & Reel option: Standard per EIA-296
- Weight: 750 mg
- See package dimensions on last page

ELECTRICAL CHARACTERISTICS @25°C

TYPE NUMBER	MINIMUM BREAK-DOWN VOLTAGE V_R $I_R = 50 \mu A$	MAXIMUM FORWARD VOLTAGE $V_F @ I_F$		WORKING PEAK REVERSE VOLTAGE V_{RWM}	MAXIMUM REVERSE CURRENT $I_R @ V_{RWM}$		MAXIMUM REVERSE RECOVERY TIME (LOW CURRENT) t_{rr} Note 1	MAXIMUM REVERSE RECOVERY TIME (HIGH CURRENT) t_{rr} Note 2	PEAK RECOVERY CURRENT $I_{RM} (rec)$ $I_F = 2 A$, $100 A/\mu s$ Note 2	FORWARD RECOVERY VOLTAGE $V_{FRM} Max$ $I_F = 0.5 A$ $t_r = 12 ns$
		$V @ A$	$V @ A$		$T_A=25^\circ C$	$T_A=150^\circ C$				
	V	V @ A	V @ A	V	μA	μA	ns	ns	A	V
1N6626	220	1.35V @ 2.0 A	1.50V @ 4.0A	200	2.0	500	30	45	3.5	8
1N6627	440	1.35V @ 2.0 A	1.50V @ 4.0A	400	2.0	500	30	45	3.5	8
1N6628	660	1.35V @ 2.0 A	1.50V @ 4.0A	600	2.0	500	30	45	3.5	8
1N6629	880	1.40V @ 1.4 A	1.70V @ 3.0A	800	2.0	500	50	60	4.2	12
1N6630	990	1.40V @ 1.4 A	1.70V @ 3.0A	900	2.0	500	50	60	4.2	12
1N6631	1100	1.60V @ 1.4 A	1.95V @ 2.0A	1000	4.0	600	60	80	5.0	20

NOTE 1: Low Current Reverse Recovery Time Test Conditions: $I_F=0.5A$, $I_{RM}=1.0A$, $I_{R(REC)} = 0.25A$ per MIL-STD-750, Method 4031, Condition B.

NOTE 2: High Current Reverse Recovery Time Test Conditions: $I_F = 2 A$, $100 A/\mu s$ MIL-STD-750, Method 4031, Condition D.

SYMBOLS & DEFINITIONS

Symbol	Definition
V_{BR}	Minimum Breakdown Voltage: The minimum voltage the device will exhibit at a specified current.
V_{RWM}	Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range.
V_F	Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current.
I_R	Maximum Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature.
C	Capacitance: The capacitance in pF at a frequency of 1 MHz and specified voltage.
t_{rr}	Reverse Recovery Time: The time interval between the instant the current passes through zero when changing from the forward direction to the reverse direction and a specified recovery decay point after a peak reverse current is reached.

CHARTS AND GRAPHS

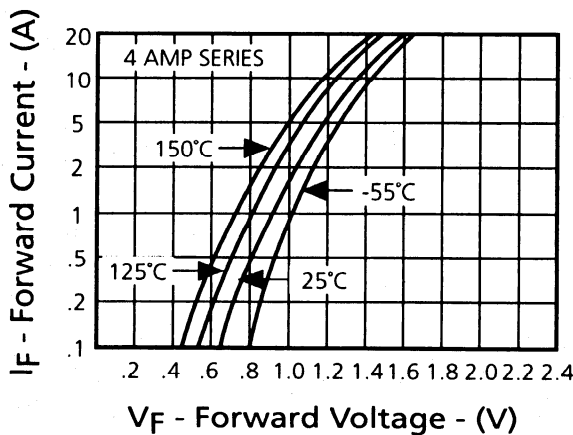


FIGURE 1
Typical Forward Current
vs
Forward Voltage

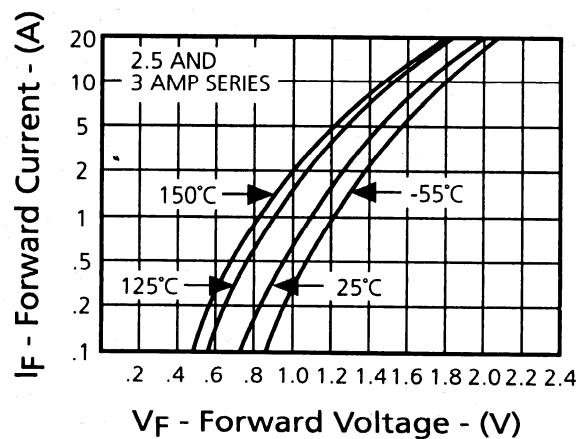


FIGURE 2
Typical Forward Current
vs
Forward Voltage

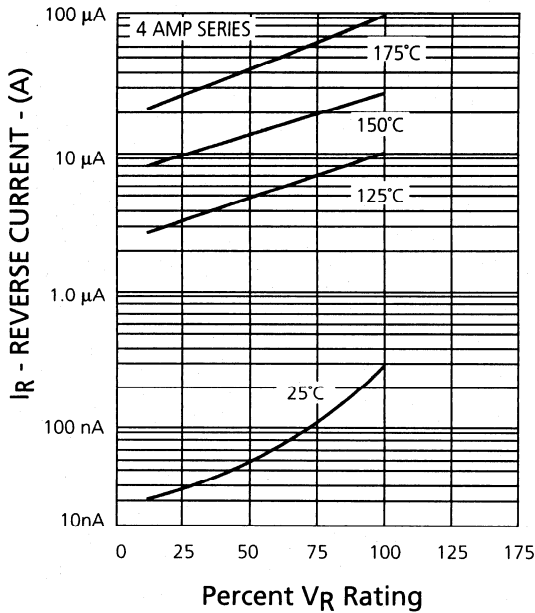


FIGURE 3
Typical Reverse Current vs.
Applied Reverse Voltage

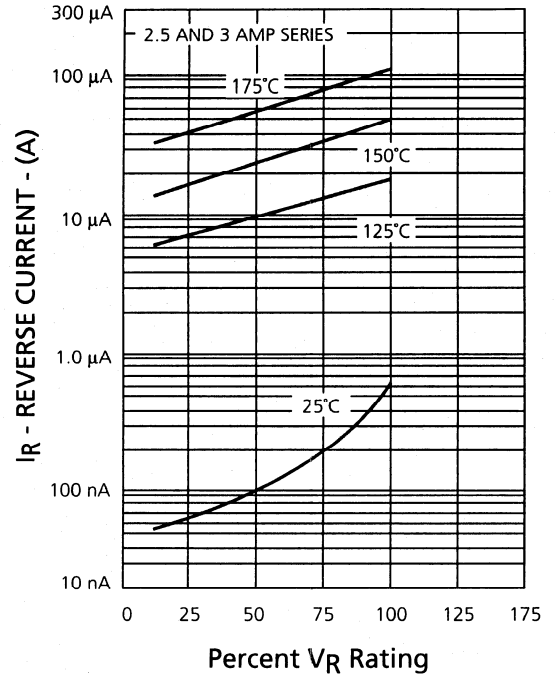


FIGURE 4
Typical Reverse Current vs.
Applied Reverse Voltage

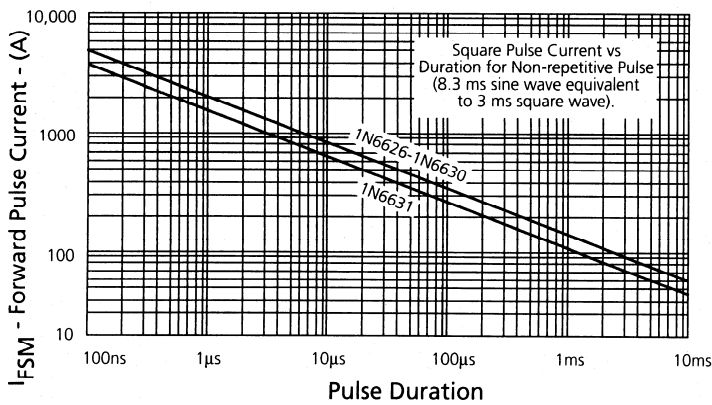


FIGURE 5
Forward Pulse Current vs.
Pulse Duration


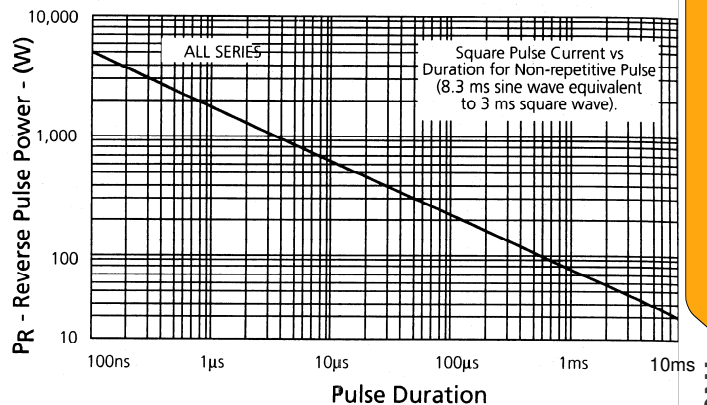


FIGURE 6
Reverse Pulse Power vs.
Pulse Duration

PACKAGE DIMENSIONS

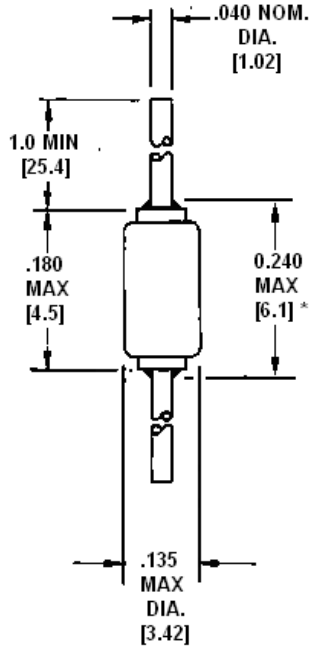

Lead Tolerance = + .002 - .003 in

*Includes sections of the lead or fillet over which the lead diameter is uncontrolled.