

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# 1SV234

#### ON Semiconductor®

http://onsemi.com

### **PIN Diode**

# Dual series PIN Diode for VHF, UHF and AGC 50V, 50mA, $r_s$ =typ 5 $\Omega$ , CP

#### **Features**

- Series connection of 2 elements in an ultrasmall package facilitates high-density mounting and permits 1SV234-applied equipment to be made smaller
- Small interterminal capacitance (C=0.23pF typ)
- Small forward series resistance (rs= $5\Omega$  typ)

#### **Specifications**


#### Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Reverse Voltage	VR		50	V
Forward Current	IF		50	mA
Allowable Power Dissipation	Р		150	mW
Junction Temperature	Tj		125	°C
Storage Temperature	Tstg		-55 to +125	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

#### **Package Dimensions**

unit : mm (typ) 7013A-008

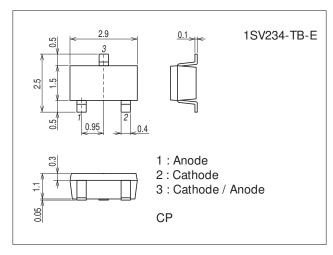


#### **Product & Package Information**

• Package : CP

• JEITA, JEDEC : SC-59, TO-236, SOT-23, TO-236AB

• Minimum Packing Quantity: 3,000 pcs./reel


#### **Packing Type: TB**



# CV LOIN

Marking

#### **Electrical Connection**



#### 1SV234


#### **Electrical Characteristics** at Ta=25°C

Parameter	Symbol	Conditions	Ratings			Unit
Farameter	Symbol		min	typ	max	Uill
Reverse Voltage	VR	I <sub>R</sub> =10μA	50			V
Reverse Current	IR	V <sub>R</sub> =50V			0.1	μΑ
Forward Voltage	VF	I <sub>F</sub> =50mA		0.95		٧
Interterminal Capacitance	С	V <sub>R</sub> =50V, f=1MHz		0.23		pF
Series Resistance	rs	IF=10mA, f=100MHz		5		Ω

Note: The specifications shown above are for each individual diode.

### **Ordering Information**

Device	Package	Shipping	memo	
1SV234-TB-E	СР	3,000pcs./reel	Pb Free	

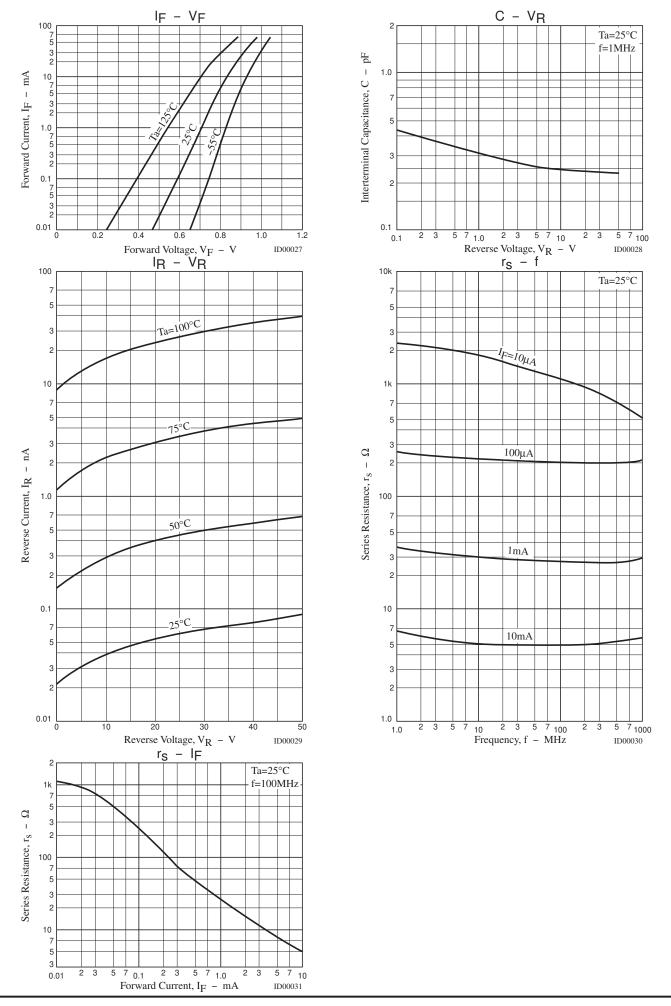


#### **Embossed Taping Specification**

#### 1SV234-TB-E


#### 1. Packing Format

Package Name	Carrier Tape	Maximum Number of devices contained (pcs)			Packing format		
	Туре	Reel	Inner box	Outer box	Inner $BOX(C-1)$	Outer BOX (A-7)	
СР	СР	3, 000	15, 000	90,000	5 reels contained	6 inner boxes contained	
					Dimensions:mm (external)	Dimensions:mm (external)	
					183×72×185	440×195×210	

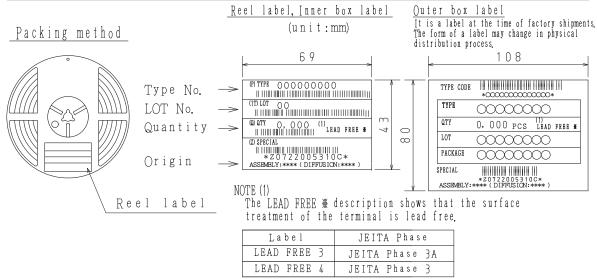


#### 7. Taping configuration

2-1. Carrier tape size (unit:mm)

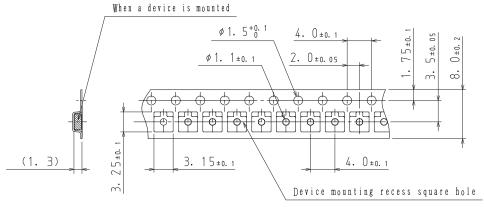

2-2. Device placement direction

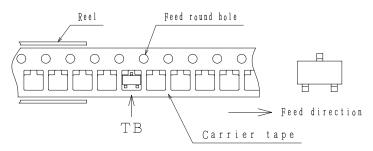


Those with one electrode terminal on the feed hole side·····TB

#### **Outline Drawing**

1SV234-TB-E

# Mass (g) Unit 0.013 \*For reference mm 0. 1+0. 1 0. 5+0. 25 2. 9±0.15 A 3 1. 5±0. 15 2. 5±0. 2 0. 5-0. 15 0. 95 0. 3±0.1 1, 1±0, 15 0. 05±0.05 \*1:Lot indication

#### **Land Pattern Example**

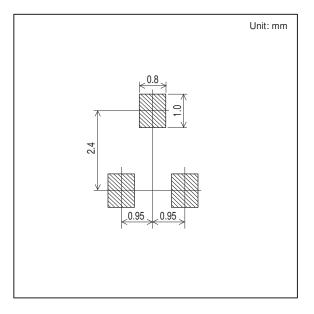

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equa