



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CUSTOMER DRAWING

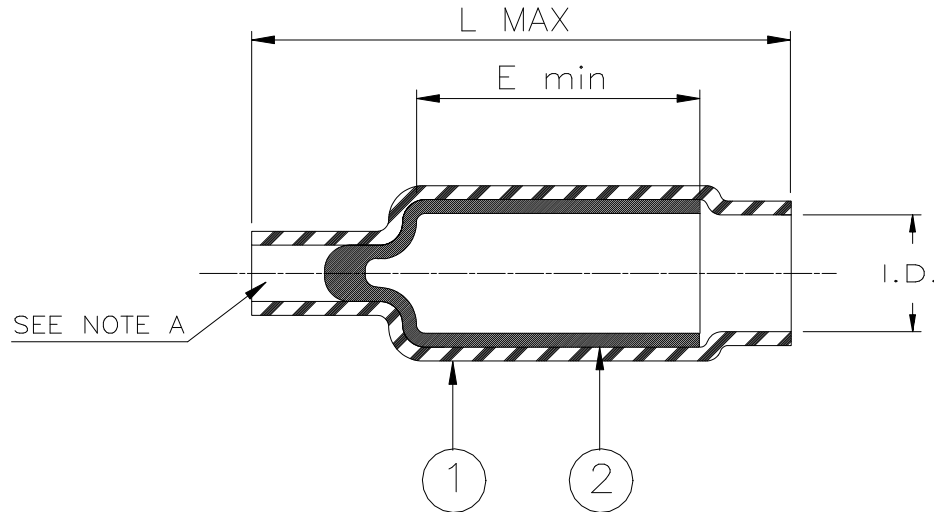

Product Name	I.D. of Liner		Weight Grams Max	Insulation Sleeve		Product Dimensions	
	Received Min	Recovered Max		Recovered I.D. Max	Recovered Wall Min	L max	E min
D-436-0184	2.15 (0.085)	0.0 (0.00)	0.3	1.37 (0.055)	0.30 (0.012)	21.3 (0.840)	13.0 (0.510)
D-436-0185	4.8 (0.188)	0.0 (0.00)	0.5	2.41 (0.095)	0.33 (0.013)	21.7 (0.855)	13.0 (0.510)
D-436-0186 (Note B)	3.05 (0.120)	0.0 (0.00)	0.4	1.37 (0.055)	0.30 (0.012)	21.3 (0.8.40)	15.25 (0.600)

Note A: This end of sleeve may have a 1.20mm (0.50) opening as received. Upon heating, sealing material will flow sufficiently to close end.


Note B: D-436-0186 has a blue color code dot

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SEALING LINER: Fluorocarbon-based thermoplastic. Color: clear.

APPLICATION

1. These parts are designed for use with Raychem parallel crimp splices to make environment-resistant stub splices in two wires having a combined insulation diameter less than the "as received" I.D. of the sleeve, and rated for at least +125°C.
2. Temperature range: -55°C to +150°C.
Parts may be installed by convection heating.

 TE Connectivity			TITLE: SEALING CAPS		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices	DOCUMENT NO.: D-436-0184/-0186		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV: D	DATE: September 20, 2011	
PREPARED BY: UNGUYEN	CAGE CODE: 06090	ECO NUMBER: ECO-11-019172	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 1998-2011 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.