



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D1	ECR-13-005975		15APR2013	RC	AH

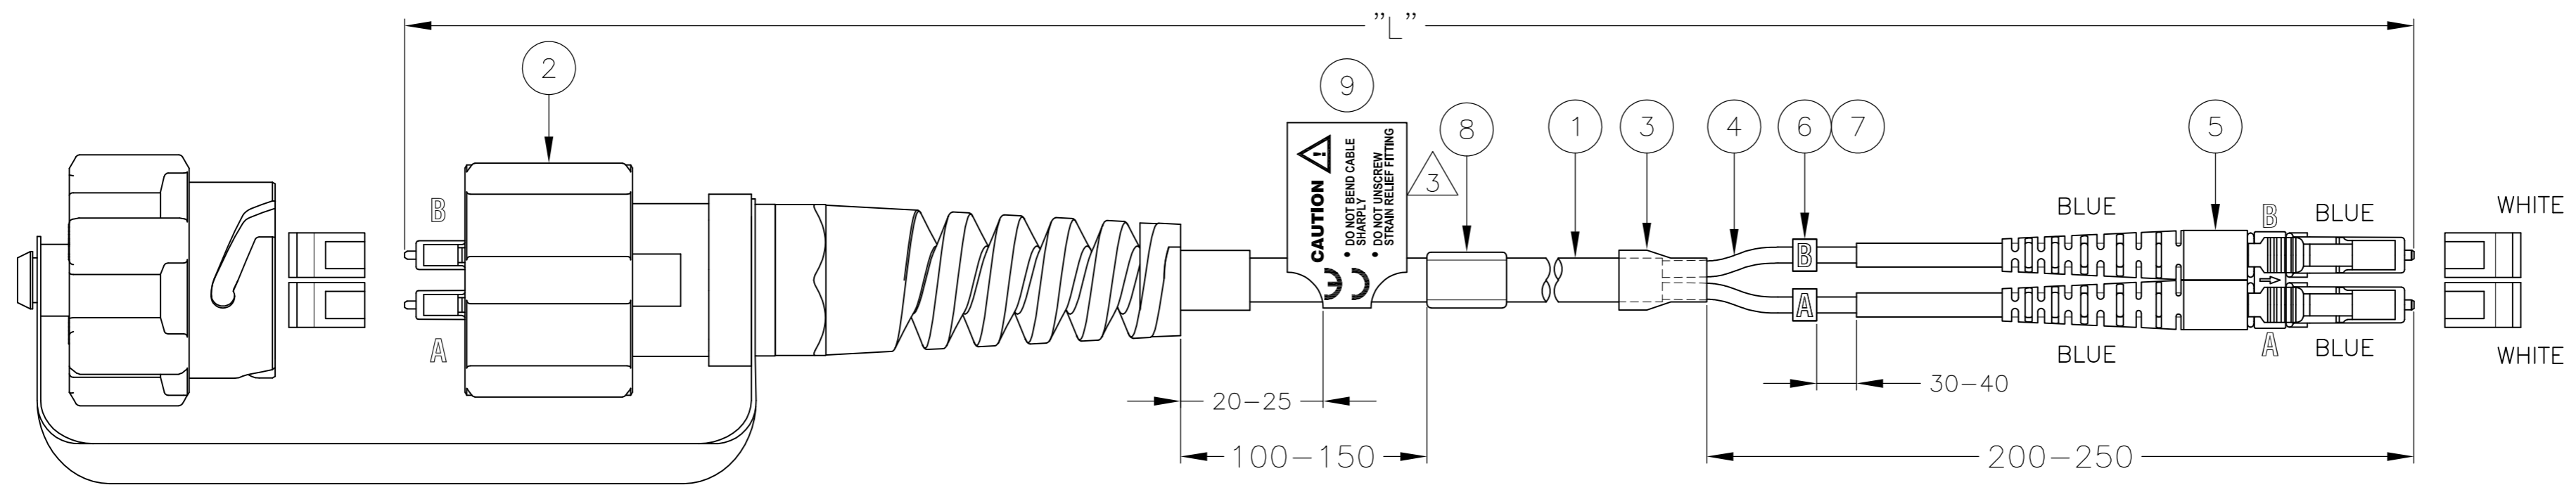

FIBER CONNECTIVITY	
ODVA	LC/DPX
A	A
B	B

PART NUMBER	"L" (METER)		MAXIMUM ATTENUATION (dB)
	MIN	MAX	
2061348-2	1.85	2.15	0.30
2061348-5	4.85	5.15	0.30
1-2061348-0	9.85	10.15	0.30
1-2061348-5	14.80	15.20	0.31
2-2061348-0	19.80	20.20	0.31
3-2061348-5	34.50	35.50	0.32
4-2061348-5	44.50	45.50	0.33
5-2061348-0	49.50	50.50	0.33
6-2061348-0	59.00	61.00	0.34
7-2061348-0	69.00	71.00	0.34
7-2061348-5	74.00	76.00	0.34
8-2061348-0	79.00	81.00	0.35
8-2061348-5	84.00	86.00	0.35
9-2061348-0	89.00	91.00	0.35
9-2061348-9	99.00	101.00	0.35
8-2061348-1	118.8	121.2	0.36
8-2061348-3	178.0	182.0	0.40
8-2061348-4	247.0	253.0	0.44
8-2061348-2	297.0	303.0	0.45

- NOTES:
- 1 MAXIMUM CONNECTOR ATTENUATION IS 0.3 dB PLUS CABLE ATTENUATION OF 0.5 dB/km AT 1310 nm (SEE TABLE)
 - 2 FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
 - 3 INFORMATION ON LABEL SEE DETAIL:
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER
 - TE CONNECTIVITY ORDER NUMBER
 - 4 CABLE INFORMATION:
 - FIBER CORE DIAMETER: 9/125 μm
 - OUTER JACKET DIAMETER: 5.5 mm
 - OUTER JACKET COLOUR: BLACK
 - OUTER JACKET MATERIAL: FLAME RETARDANT TPU
 - 5 ENVIRONMENTAL PERFORMANCE -40°C TO +85°C
 - 6 IP67 RATED
 - 7 CABLE, EXTERNAL PLUG COMPONENTS AND CAP ARE UV STABLE



Qty	Description	Item
1	FOAC ODVA WARNING LABEL WITH CE-MARKING	9
1	FOAC INFORMATION LABEL	8
1	LABEL "B"	7
1	LABEL "A"	6
1	LC DUPLEX CONNECTOR ASSEMBLY, SINGLE MODE, BLUE	5
2	FOAC PROTECTIVE TUBING, BLACK	4
1	FOAC HEAT SHRINK TUBING, BLACK	3
1	PLUG SUBASSY, LC ODVA INDUSTRIAL CONNECTOR, WITH CAP	2
L	FOCAB 5.5 mm 2FOLD, SINGLE MODE 9/125, BLACK	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R. COOLEN 11DEC2009		FIBER OPTIC LEAD 5.5 mm LC/DPX WITH ODVA ADAPTER - LC/DPX SINGLE MODE 9/125
CHK M. JANSEN 26AUG2010		
APVD J. VERHOEVEN 26AUG2010		
PRODUCT SPEC		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APPLICATION SPEC
1 PLC ± -	0 PLC ± -	1 PLC ± -
2 PLC ± -	2 PLC ± -	2 PLC ± -
3 PLC ± -	3 PLC ± -	3 PLC ± -
4 PLC ± -	4 PLC ± -	4 PLC ± -
ANGLES ± -	FINISH	WEIGHT
MATERIAL		

SCALE: A2 00779 C=2061348

CUSTOMER DRAWING

DATE: 15APR2013

SCALE: NTS

SHEET: 1 OF 1

REV: D1

2061348

A