



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-				
B		ECR-11-004693	01APR2011	RC	AH

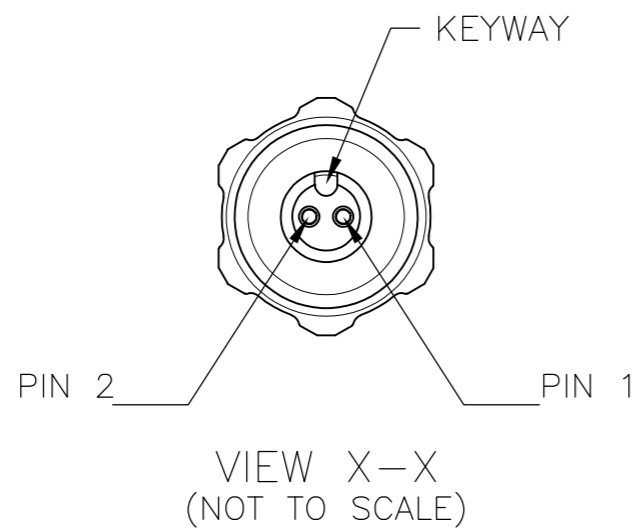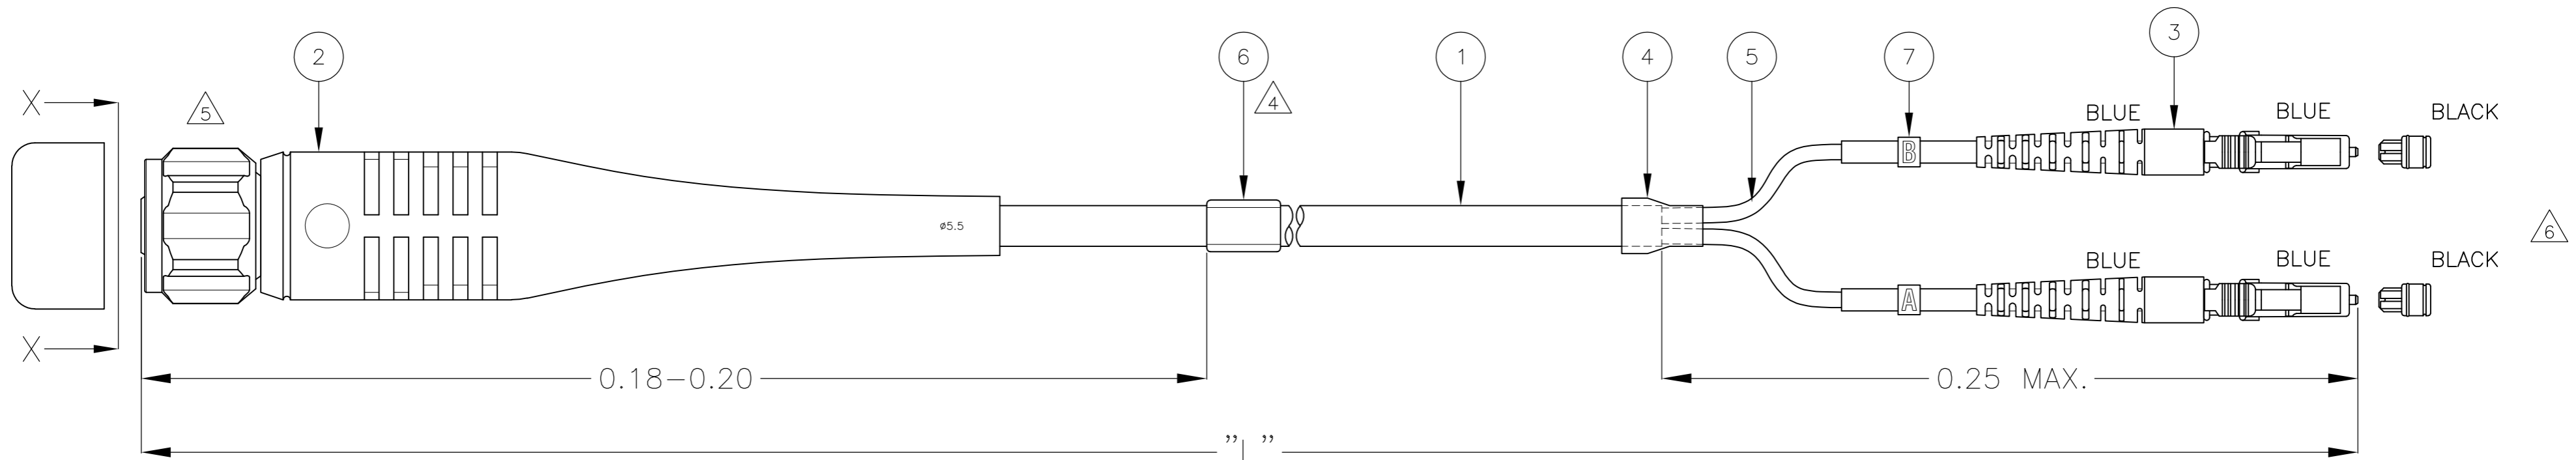

FIBER CONNECTIVITY	
ODC PLUG	LC CONN.
PIN 1	A
PIN 2	B



STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1920950	
PART NUMBER	"L" (meter) ³
X-2064140-Y	XY.0

NOTES:

- 1 REFER TO TE CONNECTIVITY CUSTOMER DRAWING 2064160 FOR CABLE ASSEMBLY LOSS AND WAVELENGTHS THAT CABLE ASSEMBLY LOSS WILL BE TESTED TO
- 2 MINIMUM RETURN LOSS: 45 dB FOR BOTH ODC AND LC CONNECTORS
RETURN LOSS WILL BE TESTED AT 1310 nm AND 1550 nm WAVELENGTHS
- ³ STANDARD LENGTHS AND LENGTH TOLERANCE ACC. TO TE CONNECTIVITY CUSTOMER DRAWING 1920950
- ⁴ INFORMATION ON LABEL SEE DETAIL:
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER
 - TE CONNECTIVITY ORDER NUMBER
- ⁵ ALLOWABLE TORQUE: 1 Nm TO 2 Nm WHEN TIGHTENING PLUG NUT
- ⁶ LENGTH DIFFERENCE BETWEEN LC CONNECTORS < 5 mm

Qty	Description	Item
2	LABEL "A" OR "B"	7
1	FOAC INFORMATION LABEL	6
2	FOAC ODC PROTECTIVE TUBING, BLACK	5
1	FOAC HEAT SHRINK TUBING, BLACK	4
2	LC CONNECTOR ASSEMBLY, SINGLE MODE, BLUE	3
1	FOKIT ODC PLUG ASSEMBLY, 2 FIBER, SINGLE MODE, VINYL CAP	2
L	FOCAB ODC 5.5 mm 2FOLD, SINGLE MODE 9/125, BLACK	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 07APR2009																
DIMENSIONS: METERS		CHK A. HENGELMOLEN 07APR2009																
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. HENGELMOLEN 07APR2009	NAME FIBER OPTIC ODC LEAD 2 FOLD PLUG - LC/PC DUAL SINGLE MODE 9/125															
<table border="1"> <tr> <td>0 PLC</td><td>± -</td></tr> <tr> <td>1 PLC</td><td>± -</td></tr> <tr> <td>2 PLC</td><td>± -</td></tr> <tr> <td>3 PLC</td><td>± -</td></tr> <tr> <td>4 PLC</td><td>± -</td></tr> <tr> <td>ANGLES</td><td>± -</td></tr> <tr> <td>FINISH</td><td>-</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	FINISH	-	PRODUCT SPEC -	SIZE A2	CAGE CODE 00779
0 PLC	± -																	
1 PLC	± -																	
2 PLC	± -																	
3 PLC	± -																	
4 PLC	± -																	
ANGLES	± -																	
FINISH	-																	
MATERIAL -		WEIGHT -	DRAWING NO. C-2064140	RESTRICTED TO -														
		CUSTOMER DRAWING	SCALE NTS	SHEET 1 of 1														
			REV B															

ODC IS A TRADEMARK OF HUBER & SUHNER AG CORPORATION