



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
CE	16					
	C	ECR-14-011637	14AUG2014	HZ	RZ	

1. MAXIMUM CONNECTOR INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION OF 3.5dB/km AT 850nm. MEASURE AGAINST A REFERENCE LEAD
2. TEST DATA PROVIDED WITH EACH ASSEMBLY.
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

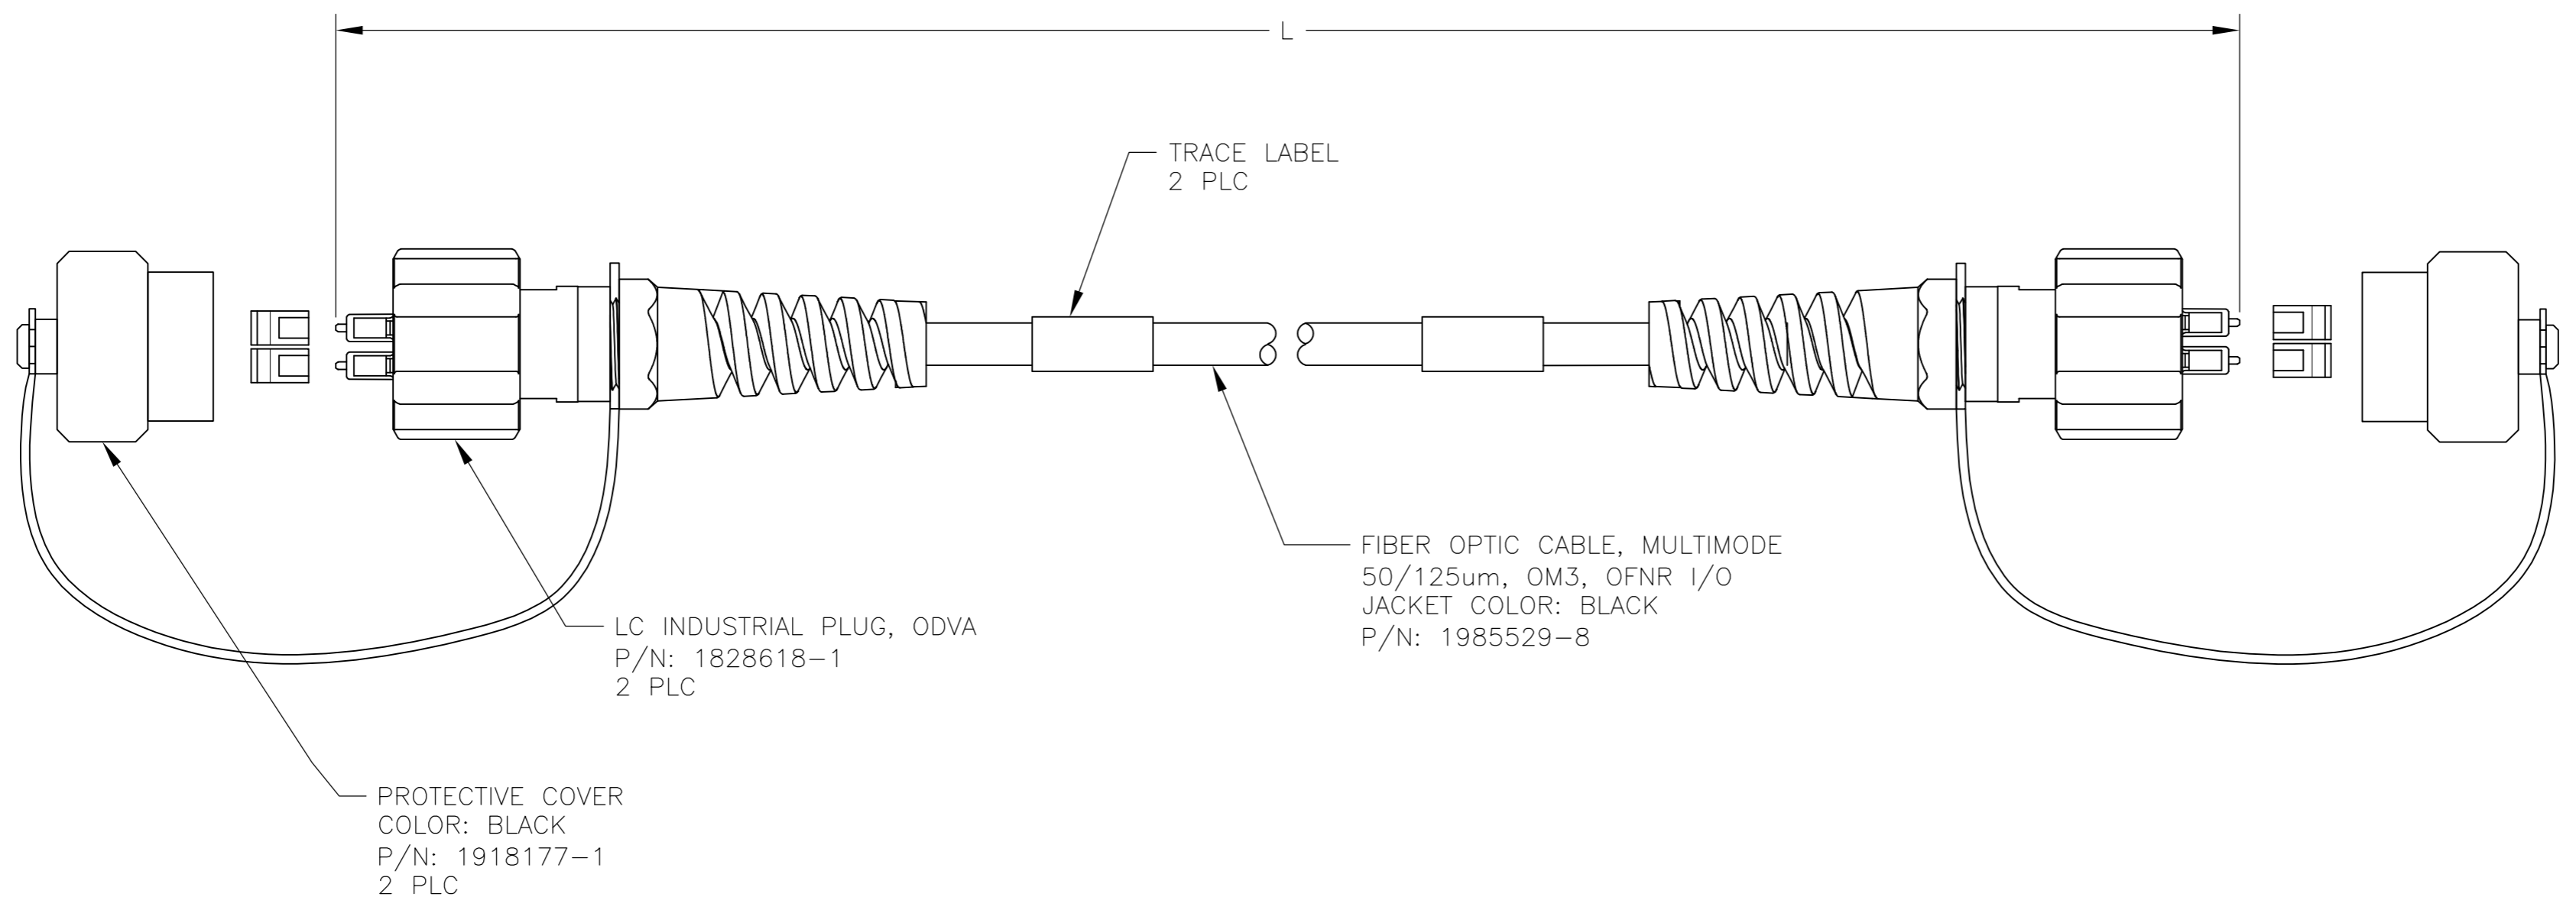

FIBER PATH DETAIL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LG EBY 23MAR09	STE TE Connectivity															
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 23MAR09																
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BAECHTLE 23MAR09	NAME CABLE ASSEMBLY, FIBER OPTIC, 50/125, OM3, 2 FIBER BREAKOUT CABLE, SEALED CIRCULAR LC DUPLEX (ODVA), BOTH ENDS															
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> <tr><td>FINISH</td><td>-</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	FINISH	-	PRODUCT SPEC -	APPLICATION SPEC -	RESTRICTED TO
0 PLC	± -																	
1 PLC	± -																	
2 PLC	± -																	
3 PLC	± -																	
4 PLC	± -																	
ANGLES	± -																	
FINISH	-																	
MATERIAL -	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO 2064915														
CUSTOMER DRAWING		SCALE NTS	SHEET 1 of 2	REV C														

2064915

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	-	-	SEE SHEET 1	-	-	-

1.38	250.0±2.50	[9842.5±98.4]	8-2064915-2
0.85	100.0±1.00	[3937.0±39.4]	8-2064915-1
1.03	152.40±1.50	[6000.0±60.0]	8-2064915-0
0.77	76.00±0.76	[2992.1±29.9]	7-2064915-6
0.76	75.00±0.75	[2953.0±30.0]	7-2064915-5
0.71	61.00±0.61	[2400.0±24.0]	6-2064915-1
0.68	50.00±0.50	[1969.0±20.0]	5-2064915-0
0.64	40.00±0.40	[1574.80±15.75]	4-2064915-0
0.64	39.00±0.35	[1535.43±13.78]	3-2064915-9
0.63	38.00±0.35	[1496.06±13.78]	3-2064915-8
0.63	37.00±0.35	[1456.69±13.78]	3-2064915-7
0.63	36.00±0.35	[1417.32±13.78]	3-2064915-6
0.62	35.00±0.35	[1377.95±13.78]	3-2064915-5
0.62	34.00±0.30	[1338.58±11.81]	3-2064915-4
0.62	33.00±0.30	[1299.21±11.81]	3-2064915-3
0.61	32.00±0.30	[1259.84±11.81]	3-2064915-2
0.61	31.00±0.30	[1220.47±11.81]	3-2064915-1
0.61	30.00±0.30	[1181.10±11.81]	3-2064915-0
0.60	29.00±0.30	[1141.73±11.81]	2-2064915-9
0.60	28.00±0.30	[1102.36±11.81]	2-2064915-8
0.59	27.00±0.30	[1062.99±11.81]	2-2064915-7
0.59	26.00±0.30	[1023.62±11.81]	2-2064915-6
0.59	25.00±0.30	[984.25±11.81]	2-2064915-5
0.58	24.00±0.30	[944.88±11.81]	2-2064915-4
0.58	23.00±0.30	[905.51±11.81]	2-2064915-3
0.58	22.00±0.30	[866.14±11.81]	2-2064915-2
0.57	21.00±0.30	[826.77±11.81]	2-2064915-1
0.57	20.00±0.30	[787.40±11.81]	2-2064915-0
0.57	19.00±0.30	[748.03±11.81]	1-2064915-9
0.56	18.00±0.30	[708.66±11.81]	1-2064915-8
0.56	17.00±0.30	[669.29±11.81]	1-2064915-7
0.56	16.00±0.30	[629.92±11.81]	1-2064915-6
0.55	15.00±0.15	[590.55±5.91]	1-2064915-5
0.55	14.00±0.15	[551.18±5.91]	1-2064915-4
0.55	13.00±0.15	[511.81±5.91]	1-2064915-3
0.54	12.00±0.15	[472.44±5.91]	1-2064915-2
0.54	11.00±0.15	[433.07±5.91]	1-2064915-1
0.54	10.00±0.15	[393.70±5.91]	1-2064915-0
0.53	9.00±0.15	[354.33±5.91]	2064915-9
0.53	8.00±0.15	[314.96±5.91]	2064915-8
0.52	7.00±0.08	[275.59±3.15]	2064915-7
0.52	6.00±0.08	[236.22±3.15]	2064915-6
0.52	5.00±0.08	[196.85±3.15]	2064915-5
0.51	4.00±0.08	[157.48±3.15]	2064915-4
0.51	3.00±0.05	[118.11±1.97]	2064915-3
0.51	2.00±0.05	[78.74±1.97]	2064915-2
0.50	1.00±0.05	[39.37±1.97]	2064915-1

MAX IL (dB) 1 L METERS [INCHES] PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	23MAR09		TE Connectivity		
DIMENSIONS: METERS [INCHES]		CHK	23MAR09		NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		J. DUNCAN			CABLE ASSEMBLY, FIBER OPTIC,		
0 PLC ± -		D. BAECHTLE			50/125, OM3, 2 FIBER BREAKOUT CABLE,		
1 PLC ± -		APVD		SEALED CIRCULAR LC DUPLEX (ODVA), BOTH ENDS			
2 PLC ± -		23MAR09		PRODUCT SPEC			
3 PLC ± -		-		APPLICATION SPEC			
4 PLC ± -		-		SIZE			
ANGLES ± -		-		CAGE CODE			
MATERIAL		WEIGHT		DRAWING NO			
FINISH		-		RESTRICTED TO			
-		-		A2 00779 C=2064915			
-		CUSTOMER DRAWING		SCALE NTS SHEET 2 OF 2 REV C			