



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC
H




DIST
-

REVISIONS


P LTR
A

DESCRIPTION
INITIAL DRAWING

DATE
04FEB2015
DWN
GSK
APVD
BvH

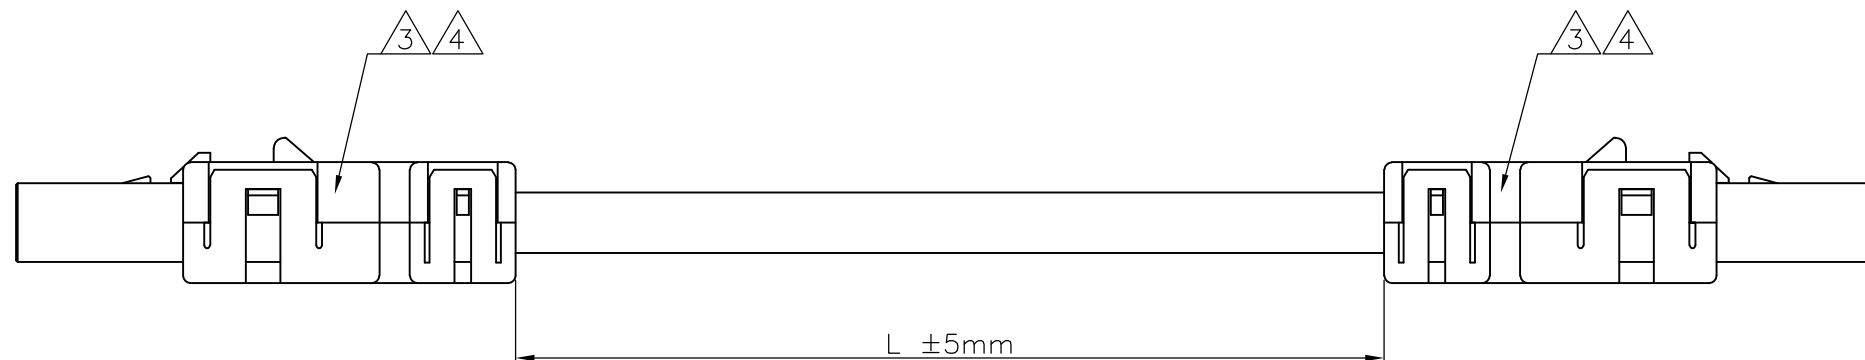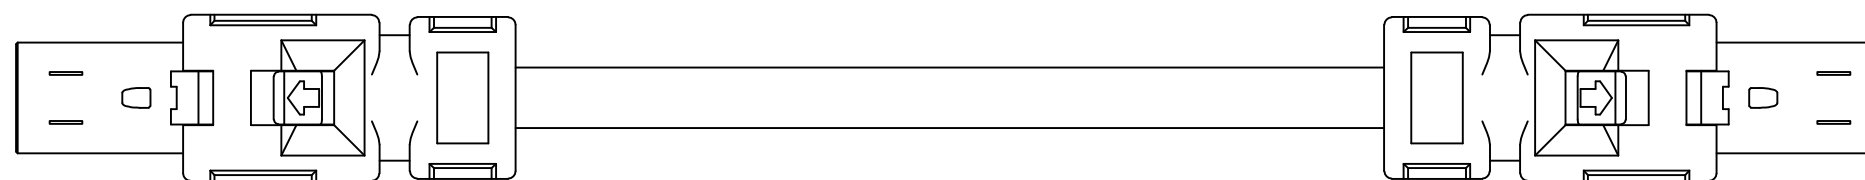

VIEW A



VIEW B

NOTES:

- 1 PACKAGING: ACC. TO TE SPEC. 107-18032
- 2 ELECTRICAL TEST ACCORDING TE SPECIFICATION 108-18857.
SHORT-CIRCUIT AND CONTINUITY TEST AT 500V DC, 0.1s
- 3 KEEP THE DIRECTION OF CONNECTOR TO THE CABLE ON BOTH SIDE THE SAME
- 4 WIRING SCHEMA ACC. TO TIA/EIA-568-B AS SHOWN IN WIRING SCHEDULE

WIRING SCHEDULE

CAVITY SIDE A	COLOR	CAVITY SIDE B
1	WH/OG	1
2	OG	2
3	WH/GN	3
4	BU	4
5	WH/BU	5
6	GN	6
7	WH/BN	7
8	BN	8

10	HiFlex MultiPurpose 70°C PUR	2-2205132-6
5	HiFlex MultiPurpose 70°C PUR	2-2205132-5
3	HiFlex MultiPurpose 70°C PUR	2-2205132-4
2	HiFlex MultiPurpose 70°C PUR	2-2205132-3
1	HiFlex MultiPurpose 70°C PUR	2-2205132-2
0.5	HiFlex MultiPurpose 70°C PUR	2-2205132-1
10	HI 125°C TPE	1-2205132-6
5	HI 125°C TPE	1-2205132-5
3	HI 125°C TPE	1-2205132-4
2	HI 125°C TPE	1-2205132-3
1	HI 125°C TPE	1-2205132-2
0.5	HI 125°C TPE	1-2205132-1
10	STD 110°C PVC	2205132-6
5	STD 110°C PVC	2205132-5
3	STD 110°C PVC	2205132-4
2	STD 110°C PVC	2205132-3
1	STD 110°C PVC	2205132-2
0.5	STD 110°C PVC	2205132-1
Length/m	Cable version	TE PN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 04FEB2015 SATHISH KUMAR .G
CHK 04FEB2015 B.VELDHOVEN
APVD 04FEB2015 A.VAN ZANDVOORT

PRODUCT SPEC 108-78955
APPLICATION SPEC 114-5506
WEIGHT -

STE TE Connectivity
CA MINI IO MINI IO TYPE II

SIZE A3 CAGE CODE 00779 DRAWING NO C-2205132 RESTRICTED TO -
SCALE NTS SHEET 1 OF 1 REV A

CUSTOMER DRAWING

PRODUCT CHARACTERISTIC ACC. OMP EMEA_12
BESONDERE MERKMALE NACH OMP EMEA_12