



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com





Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REVISIONS				
P.	LTN	DESCRIPTION	DATE	APVD
F1		ADD NEW DASH NUMBER 2-4	05JAN2014	CZ SZ
F2		ADD NEW DASH NUMBER 2-5	09MAR2015	CZ SZ
F3		ADD NEW DASH NUMBER 2-6	24MAR2015	CZ SZ

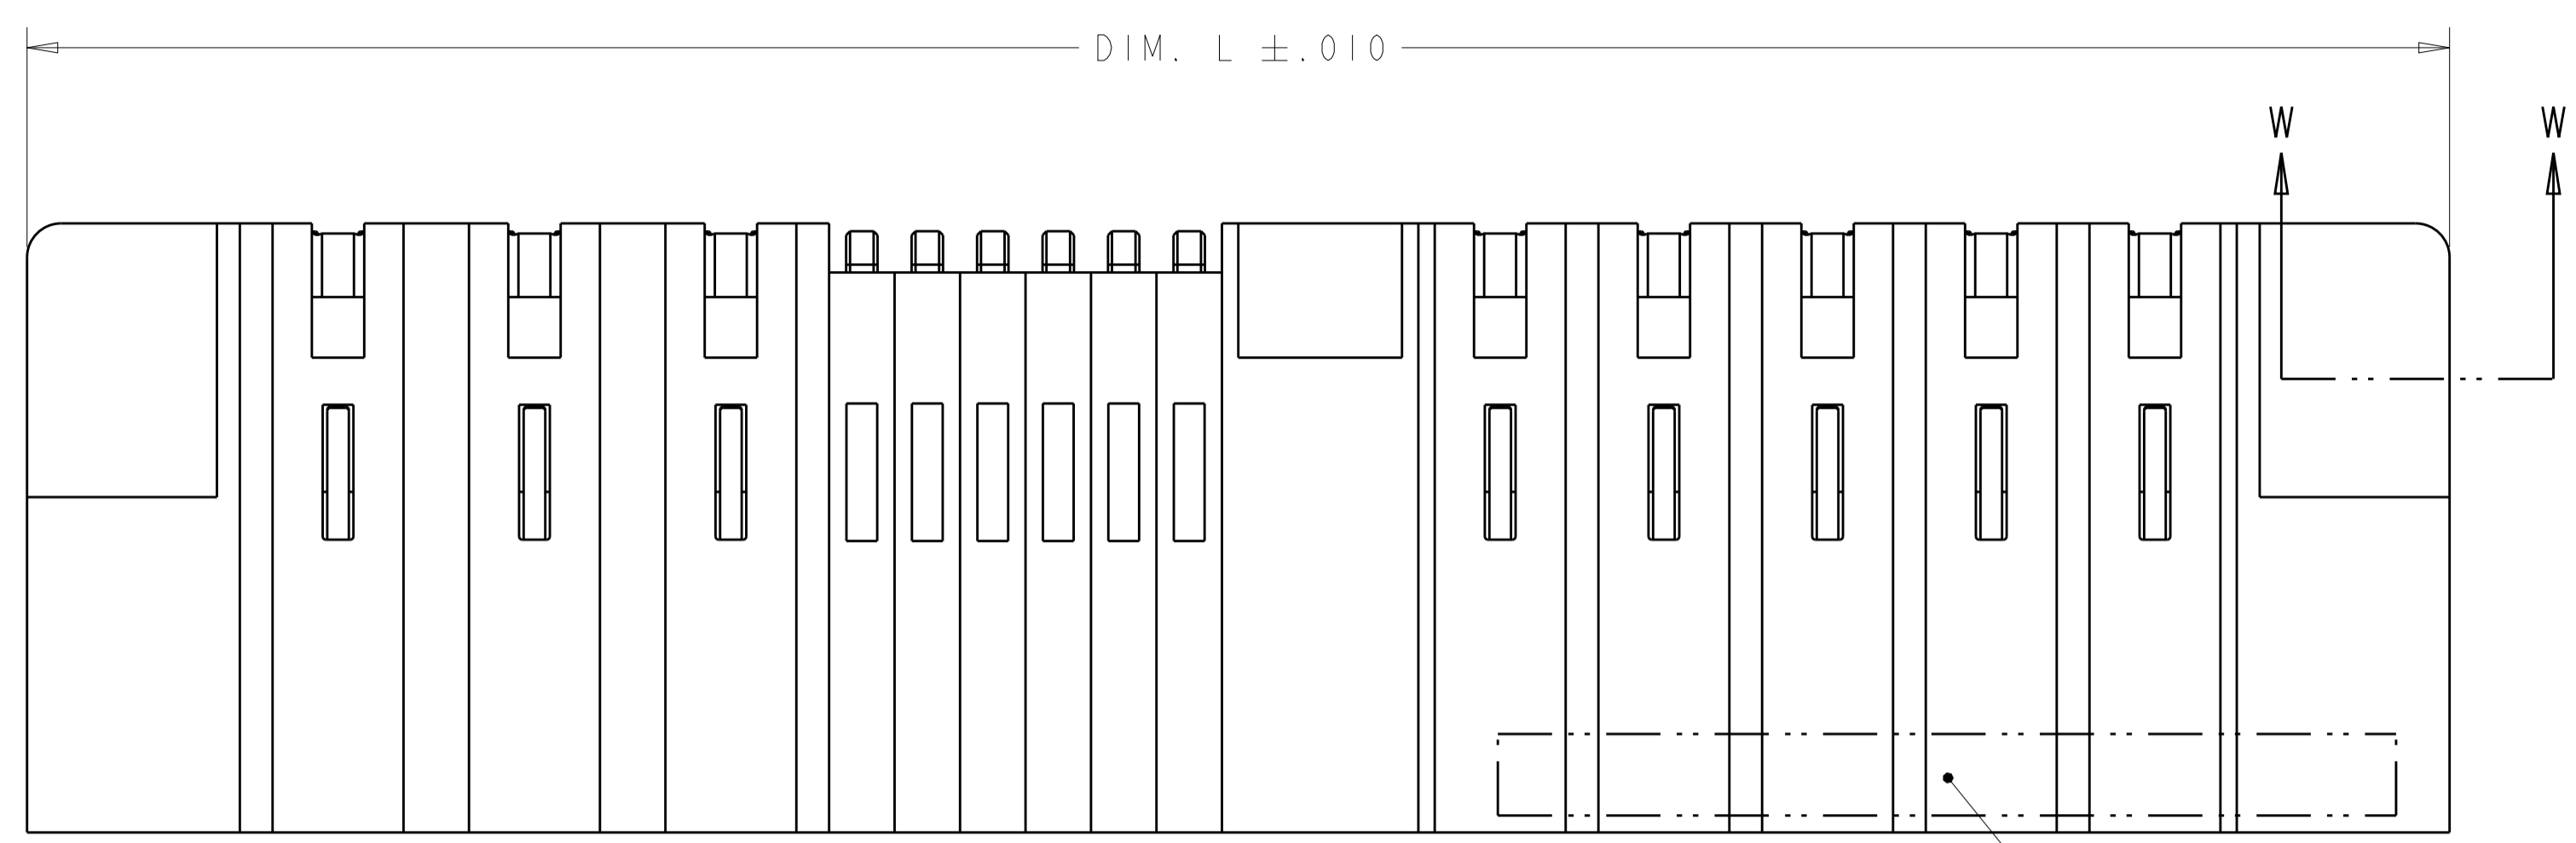

- △ OPTIONAL CENTER MODULE WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE.
- △ "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- △ MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0  
 SIGNAL CONTACT - COPPER ALLOY  
 POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- △ CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
- △ MECHANICAL CONNECTOR KEEP OUT ZONE.
- △ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △ HOLD DOWN SEATING DEPTH DIMENSION FOR 1450130-4 IS .185 TYP
- △ PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- △ PCB - .0453 +/- .0010 DRILLED HOLES PLATES WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040±.003 DIA HOLE.
- △ VARIABLE DIMENSIONS SHOWN ON VIEW ( SHEET 4).

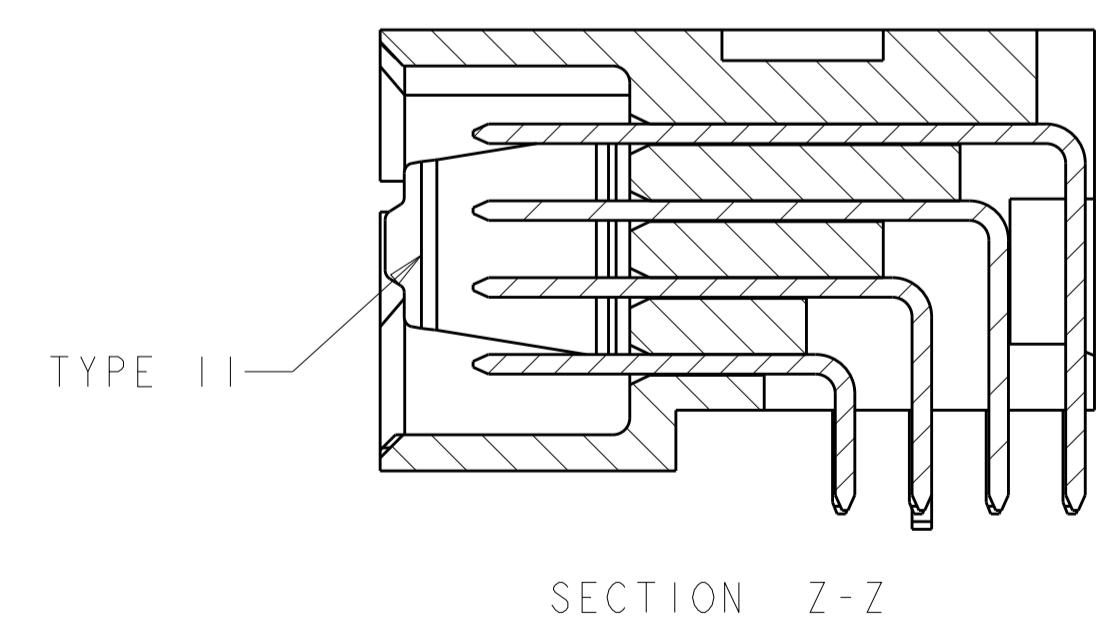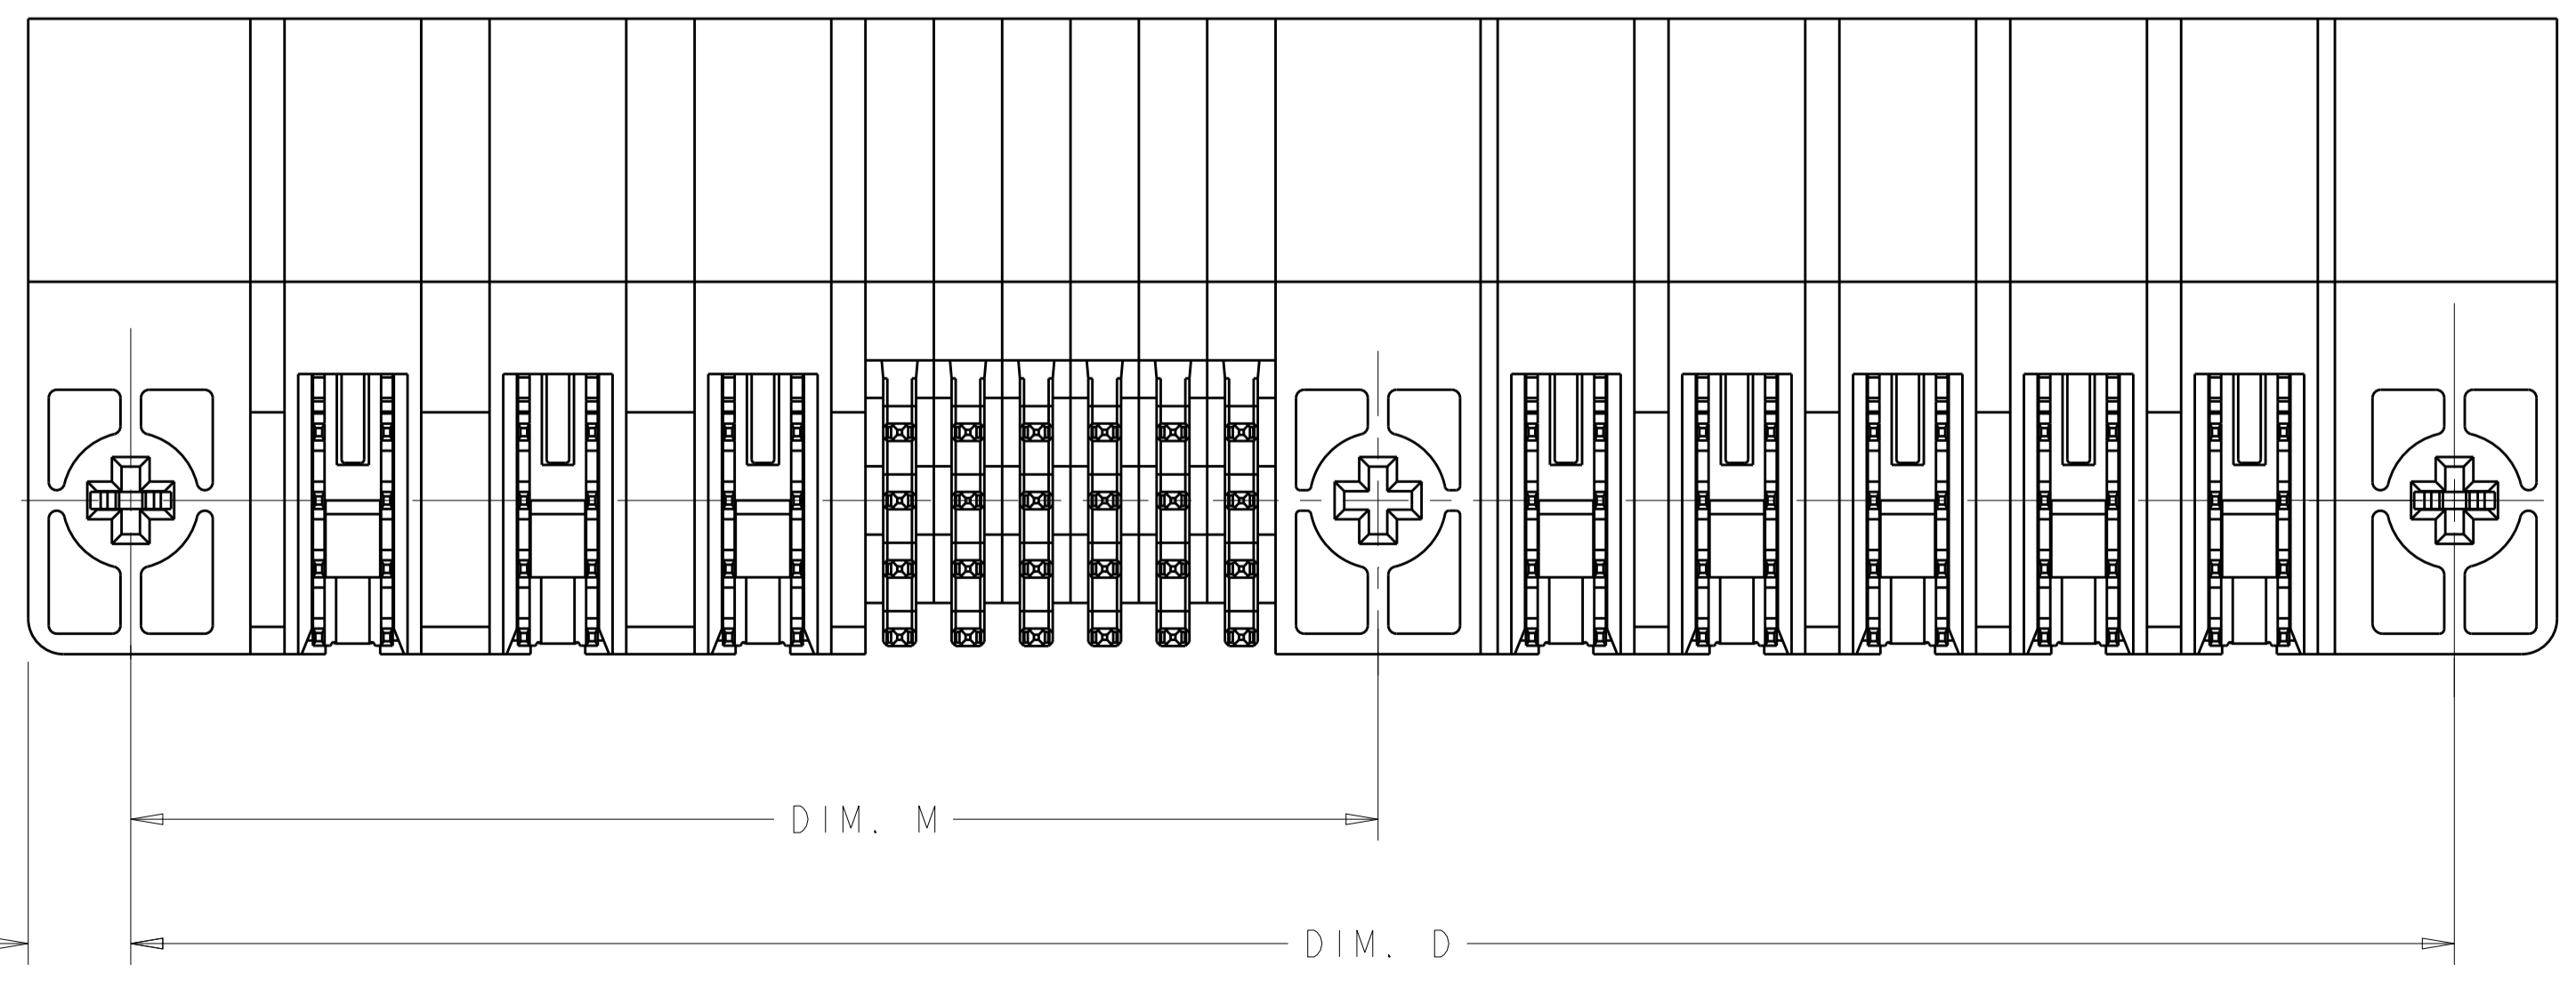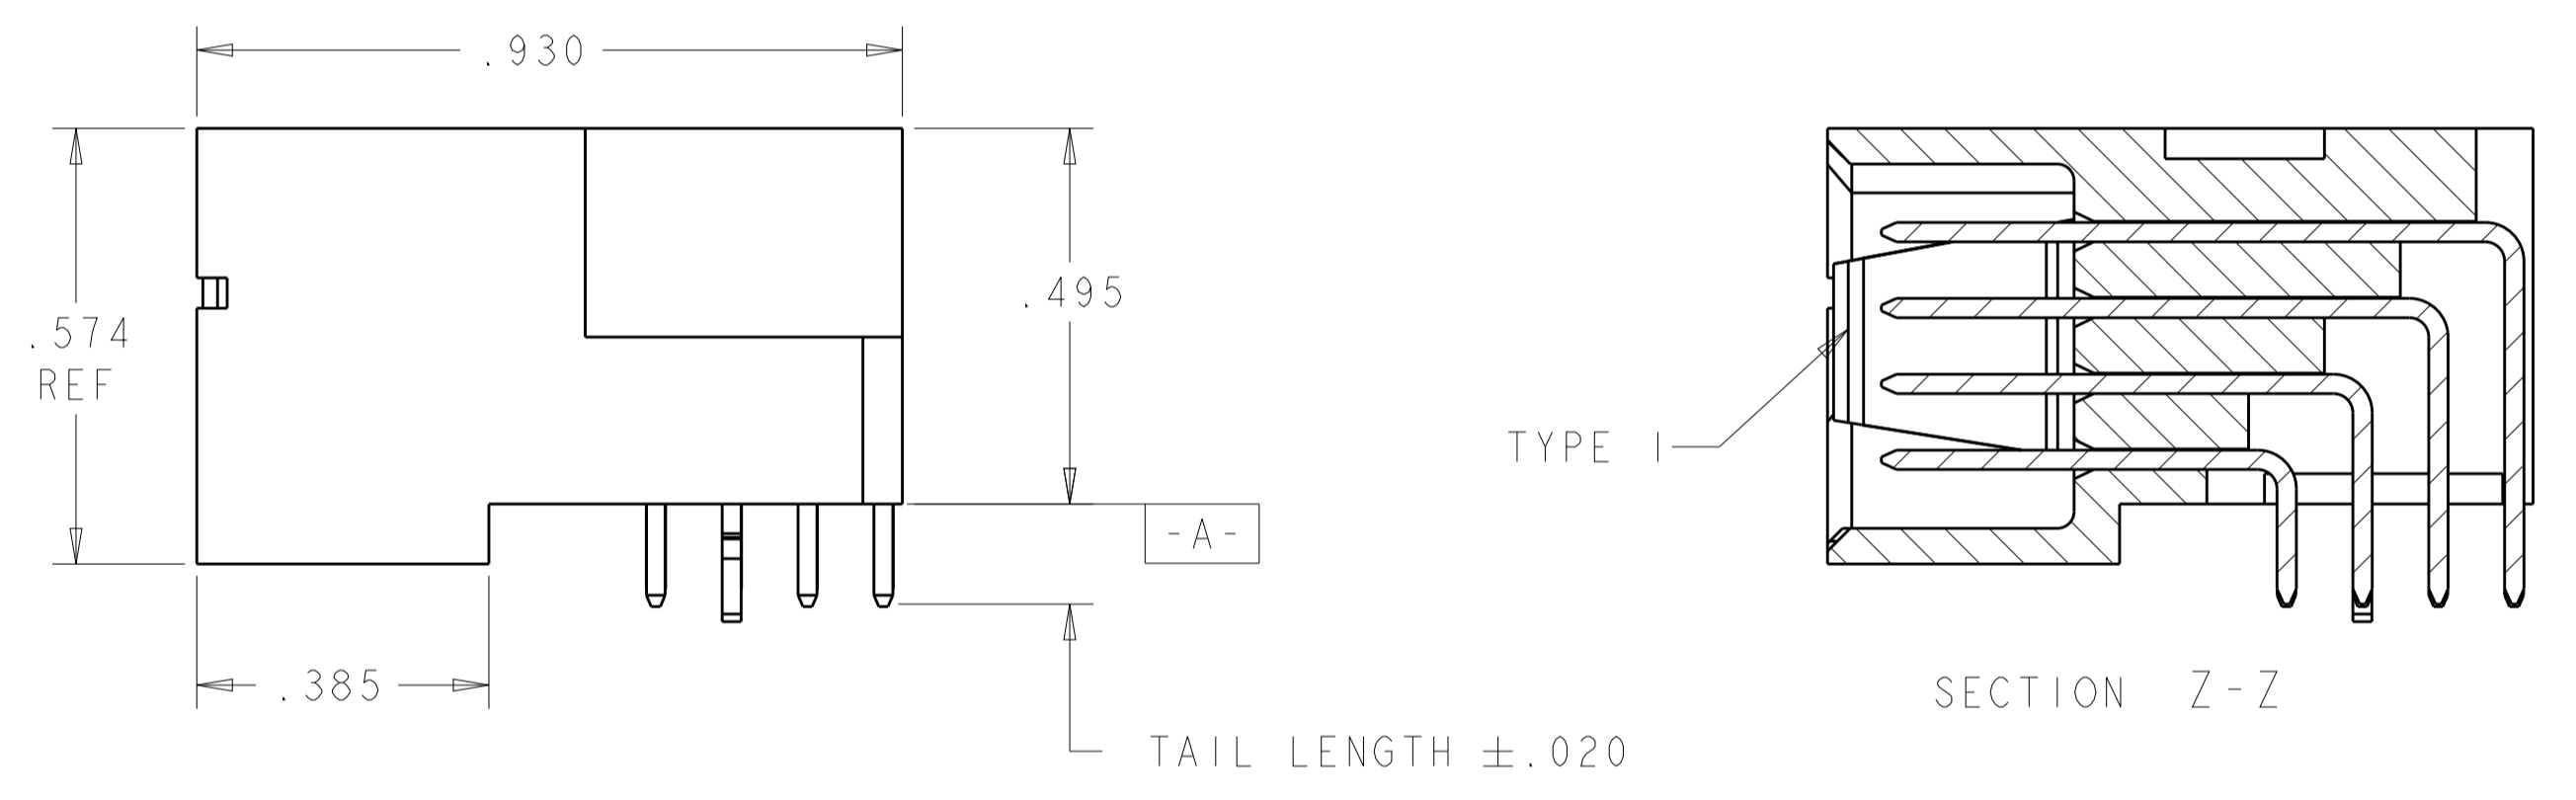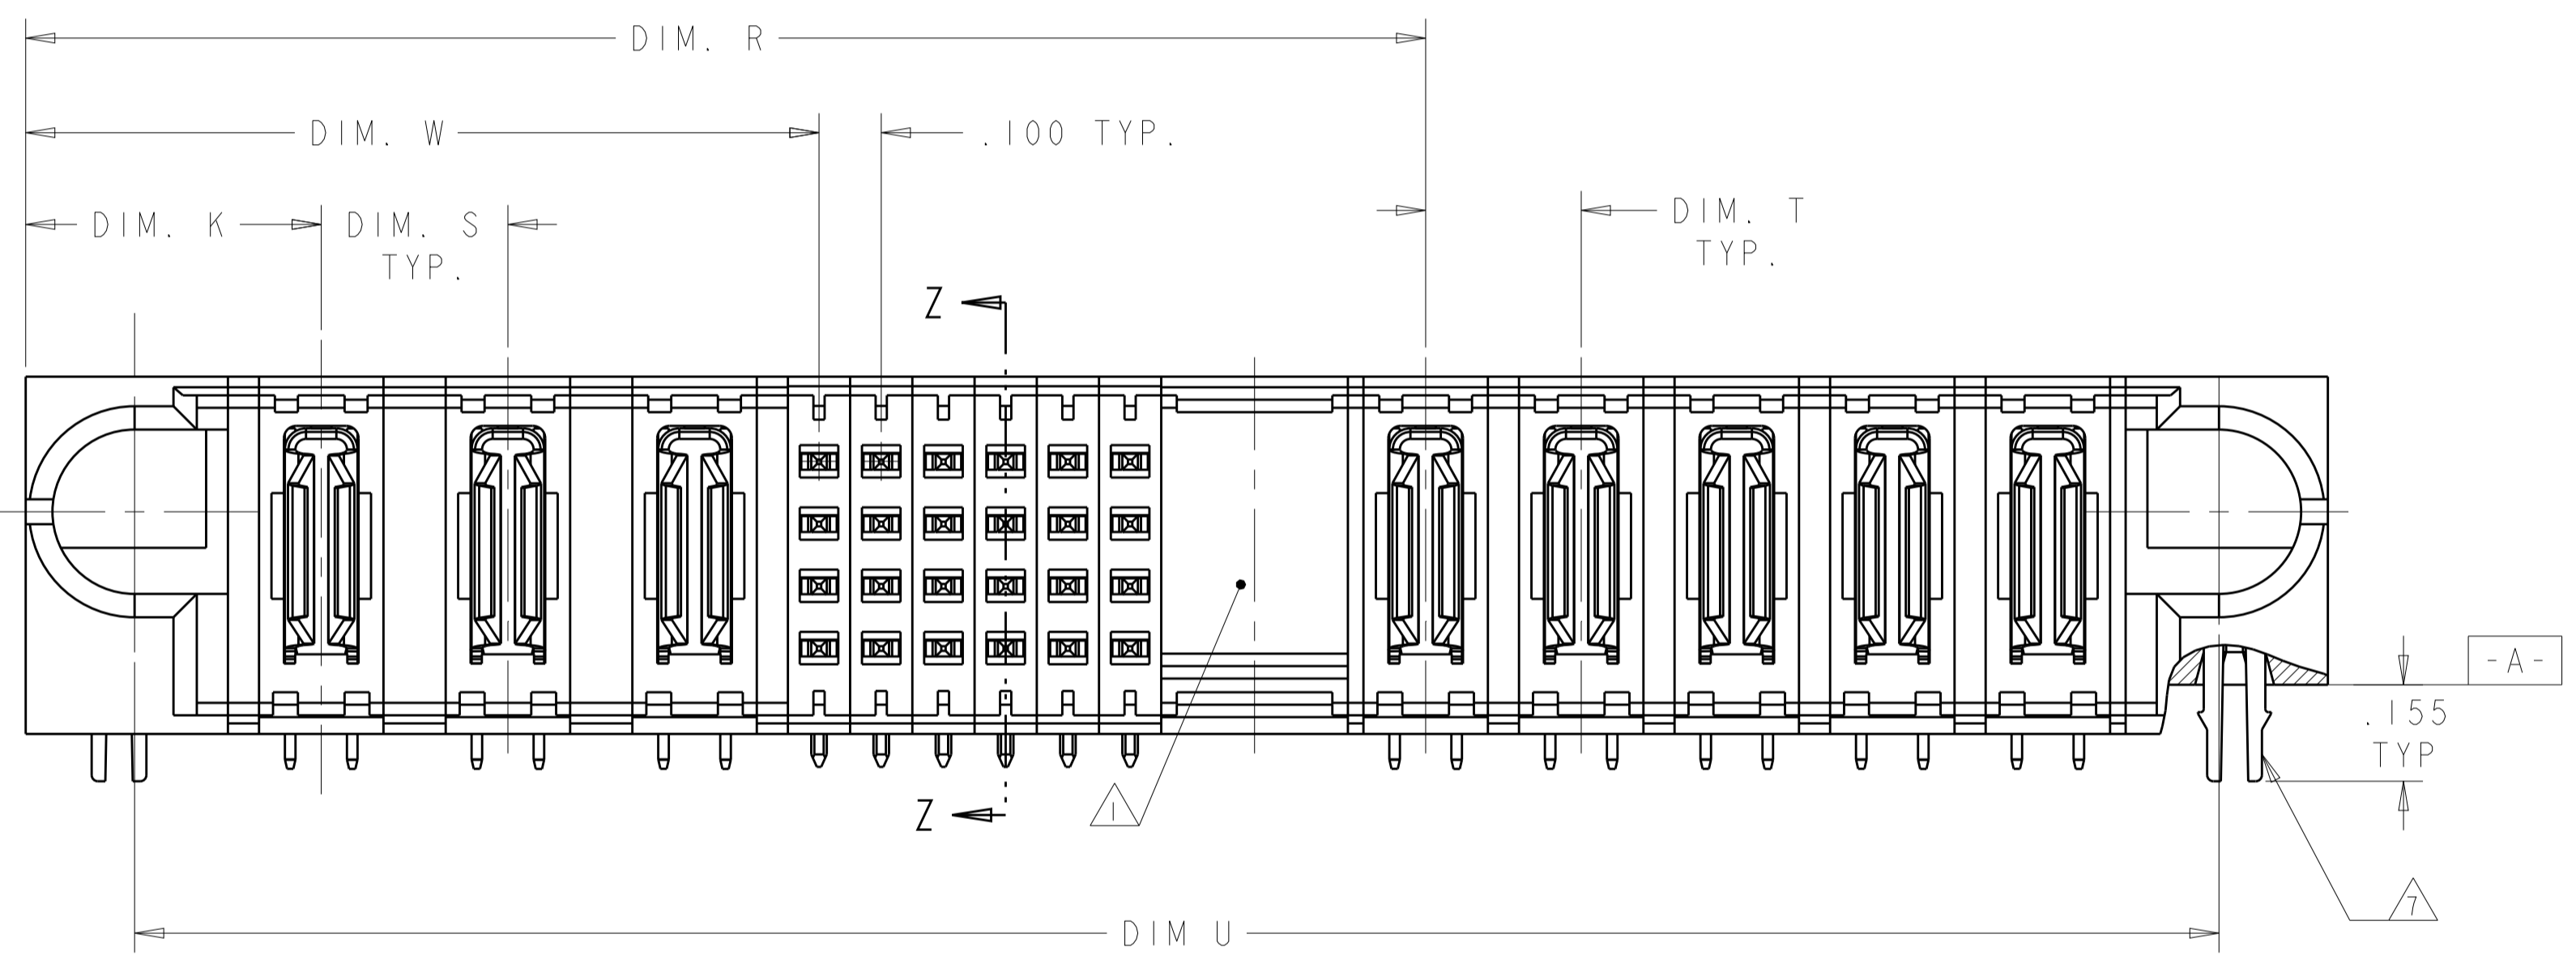

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. GRZYBOWSKI CHK: M. PERCZERKE APVD: M. PERCZERKE	DIMAROS DIMAROS DIMAROS	TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.005 3 PLC ±.0020 ANGLES ±.2°	NAME: PRODUCT SPEC: APPLICATION SPEC: SIZE: CAGE CODE DRAWING NO: WEIGHT:	NAME: PRODUCT SPEC: APPLICATION SPEC: SIZE: CAGE CODE DRAWING NO: WEIGHT:	
MATERIAL: 3	FINISH: 4	CUSTOMER DRAWING	SCALE: 4:1 SHEET 1 OF 12 REV: F3	


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P.	LTN	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

PWR CON TYPE	DIM U	DIM S	DIM T	DIM R	DIM W	DIM D	DIM M	DIM L	DIM K	DESCRIPTION	PART NUMBER
I	1.900	.300	.250	1.550	1.275	1.950	-	2.250	.475	3ACP + 8S + 2P	2-6600130-6
I	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	2-6600130-5
I	1.800	.300	.300	1.375	1.025	1.850	-	2.150	.475	2ACP + 8S + 2ACP	2-6600130-4
I	2.400	.250	.250	1.550	.875	2.450	-	2.750	.450	2P + 24S + 4P	2-6600130-2
I	2.300	.200	.200	1.650	1.225	2.350	-	2.650	.450	4P + 12S + 4P	2-6600130-1
I	2.200	.250	.250	1.350	.875	2.250	-	2.550	.450	2P + 16S + 4P	2-6600130-0
I	2.325	.300	.250	1.975	1.600	2.375	-	2.675	.450	4ACP + 12S + 2P	1-6600130-9
I	2.900	.250	.250	2.050	1.375	2.950	-	3.250	.450	4P + 24S + 4P	1-6600130-8
I	4.400	.250	.250	2.800	2.125	4.450	-	4.750	.450	7P + 24S + 7P	1-6600130-7
I	5.400	.250	.250	3.300	2.625	5.450	-	5.750	.450	9P + 24S + 9P	1-6600130-6
I	2.200	.250	.250	1.350	.875	2.250	-	2.550	.450	2P + 16S + 4P	1-6600130-5
I	2.500	.250	.250	2.150	1.425	2.550	-	2.850	.450	4P + 24S + 2P	1-6600130-4
I	2.800	$\Delta$	.250	2.450	1.975	2.850	-	3.150	.450	6P + 16S + 2P	1-6600130-3
II	3.200	.200	.200	2.125	1.575	3.250	-	3.550	.425	6P + 20S + 6P	1-6600130-1
I	5.450	$\Delta$	$\Delta$	3.075	2.425	5.500	-	5.800	.425	10P + 24S + 12P	6600130-8
I	3.650	.250	.250	2.550	1.875	3.700	-	4.000	.450	6P + 24S + 5P	6600130-6
I	4.350	.250	.250	3.000	2.125	4.400	-	4.700	.450	7P + 32S + 6P	6600130-5
I	5.100	.250	.250	3.250	2.375	5.150	-	5.450	.450	8P + 32S + 8P	6600130-4
I	7.400	.250	.250	5.050	2.875	7.450	-	7.750	.450	10P + 84S + 10P	6600130-3
I	3.300	.300	.250	1.950	1.275	3.350	-	3.650	.475	3ACP + 24S + 6P	6600130-2
I	3.050	.300	.250	1.950	1.275	3.100	-	3.400	.475	3ACP + 24S + 5P	6600130-1

F3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.02°	DWN: R. GRZYBOWSKI CHK: M. PERCHERKE APVD: M. PERCHERKE DIMAROS DIMAROS NAME: M. PERCHERKE	<b>STE</b> TE Connectivity NAME: RIGHT ANGLE HEADER ASSEMBLY PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT: - CUSTOMER DRAWING	SIZE: A1 CAGE CODE: - DRAWING NO: 6600130 SCALE: 4:1 SHEET: 2 OF 12 REV: F3
--	---	---	---	--



REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS	POWER			SIGNAL						POWER				
		P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	P7	P8
6600130-1	D C B A	PS	PS	PS	J	J	J	J	E	J	PS	PS	PS	PS	PS
					K	K	F	K	K	K					
					N	N	N	N	N	G					
					S	S	H	S	S	S					

3ACP + 24S + 5P

PART NUMBER	ROWS	POWER			SIGNAL						POWER					
		P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	P7	P8	P9
6600130-2	D C B A	PS	PS	PS	J	J	J	J	J	J	PS	PS	PS	PS	PS	PS
					K	K	K	K	K	K						
					N	N	N	N	N	N						
					H	S	S	S	S	S						

3ACP + 24S + 6P

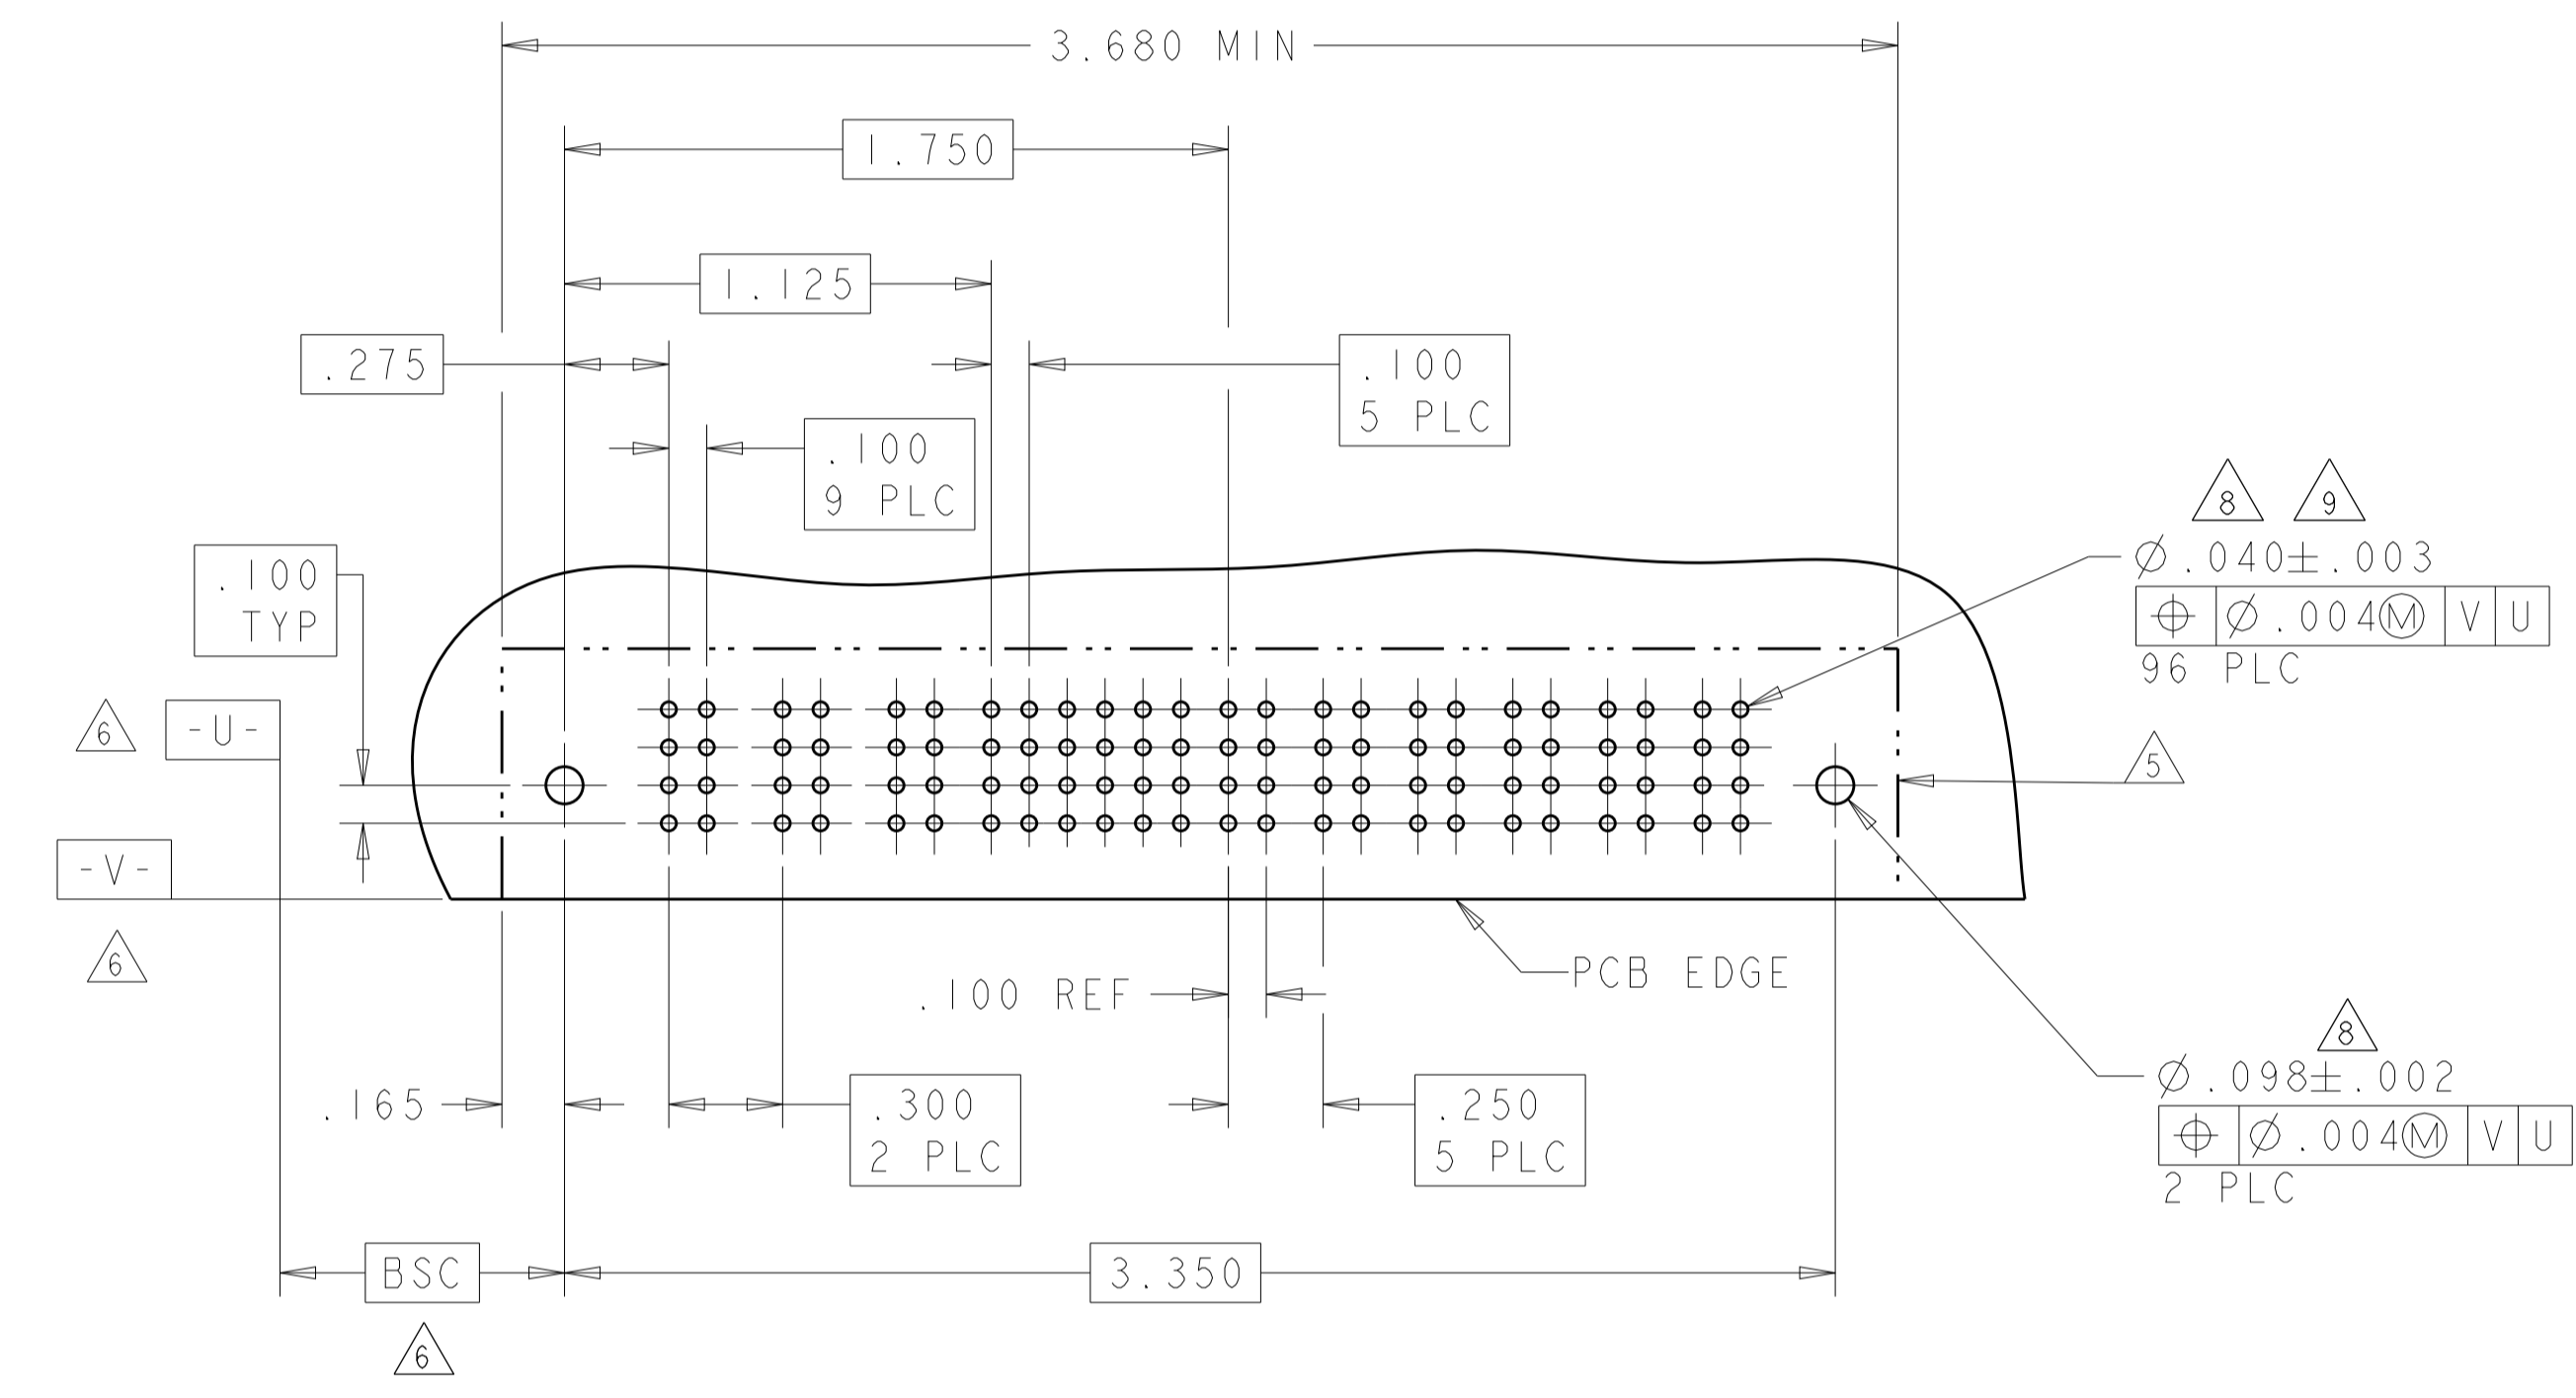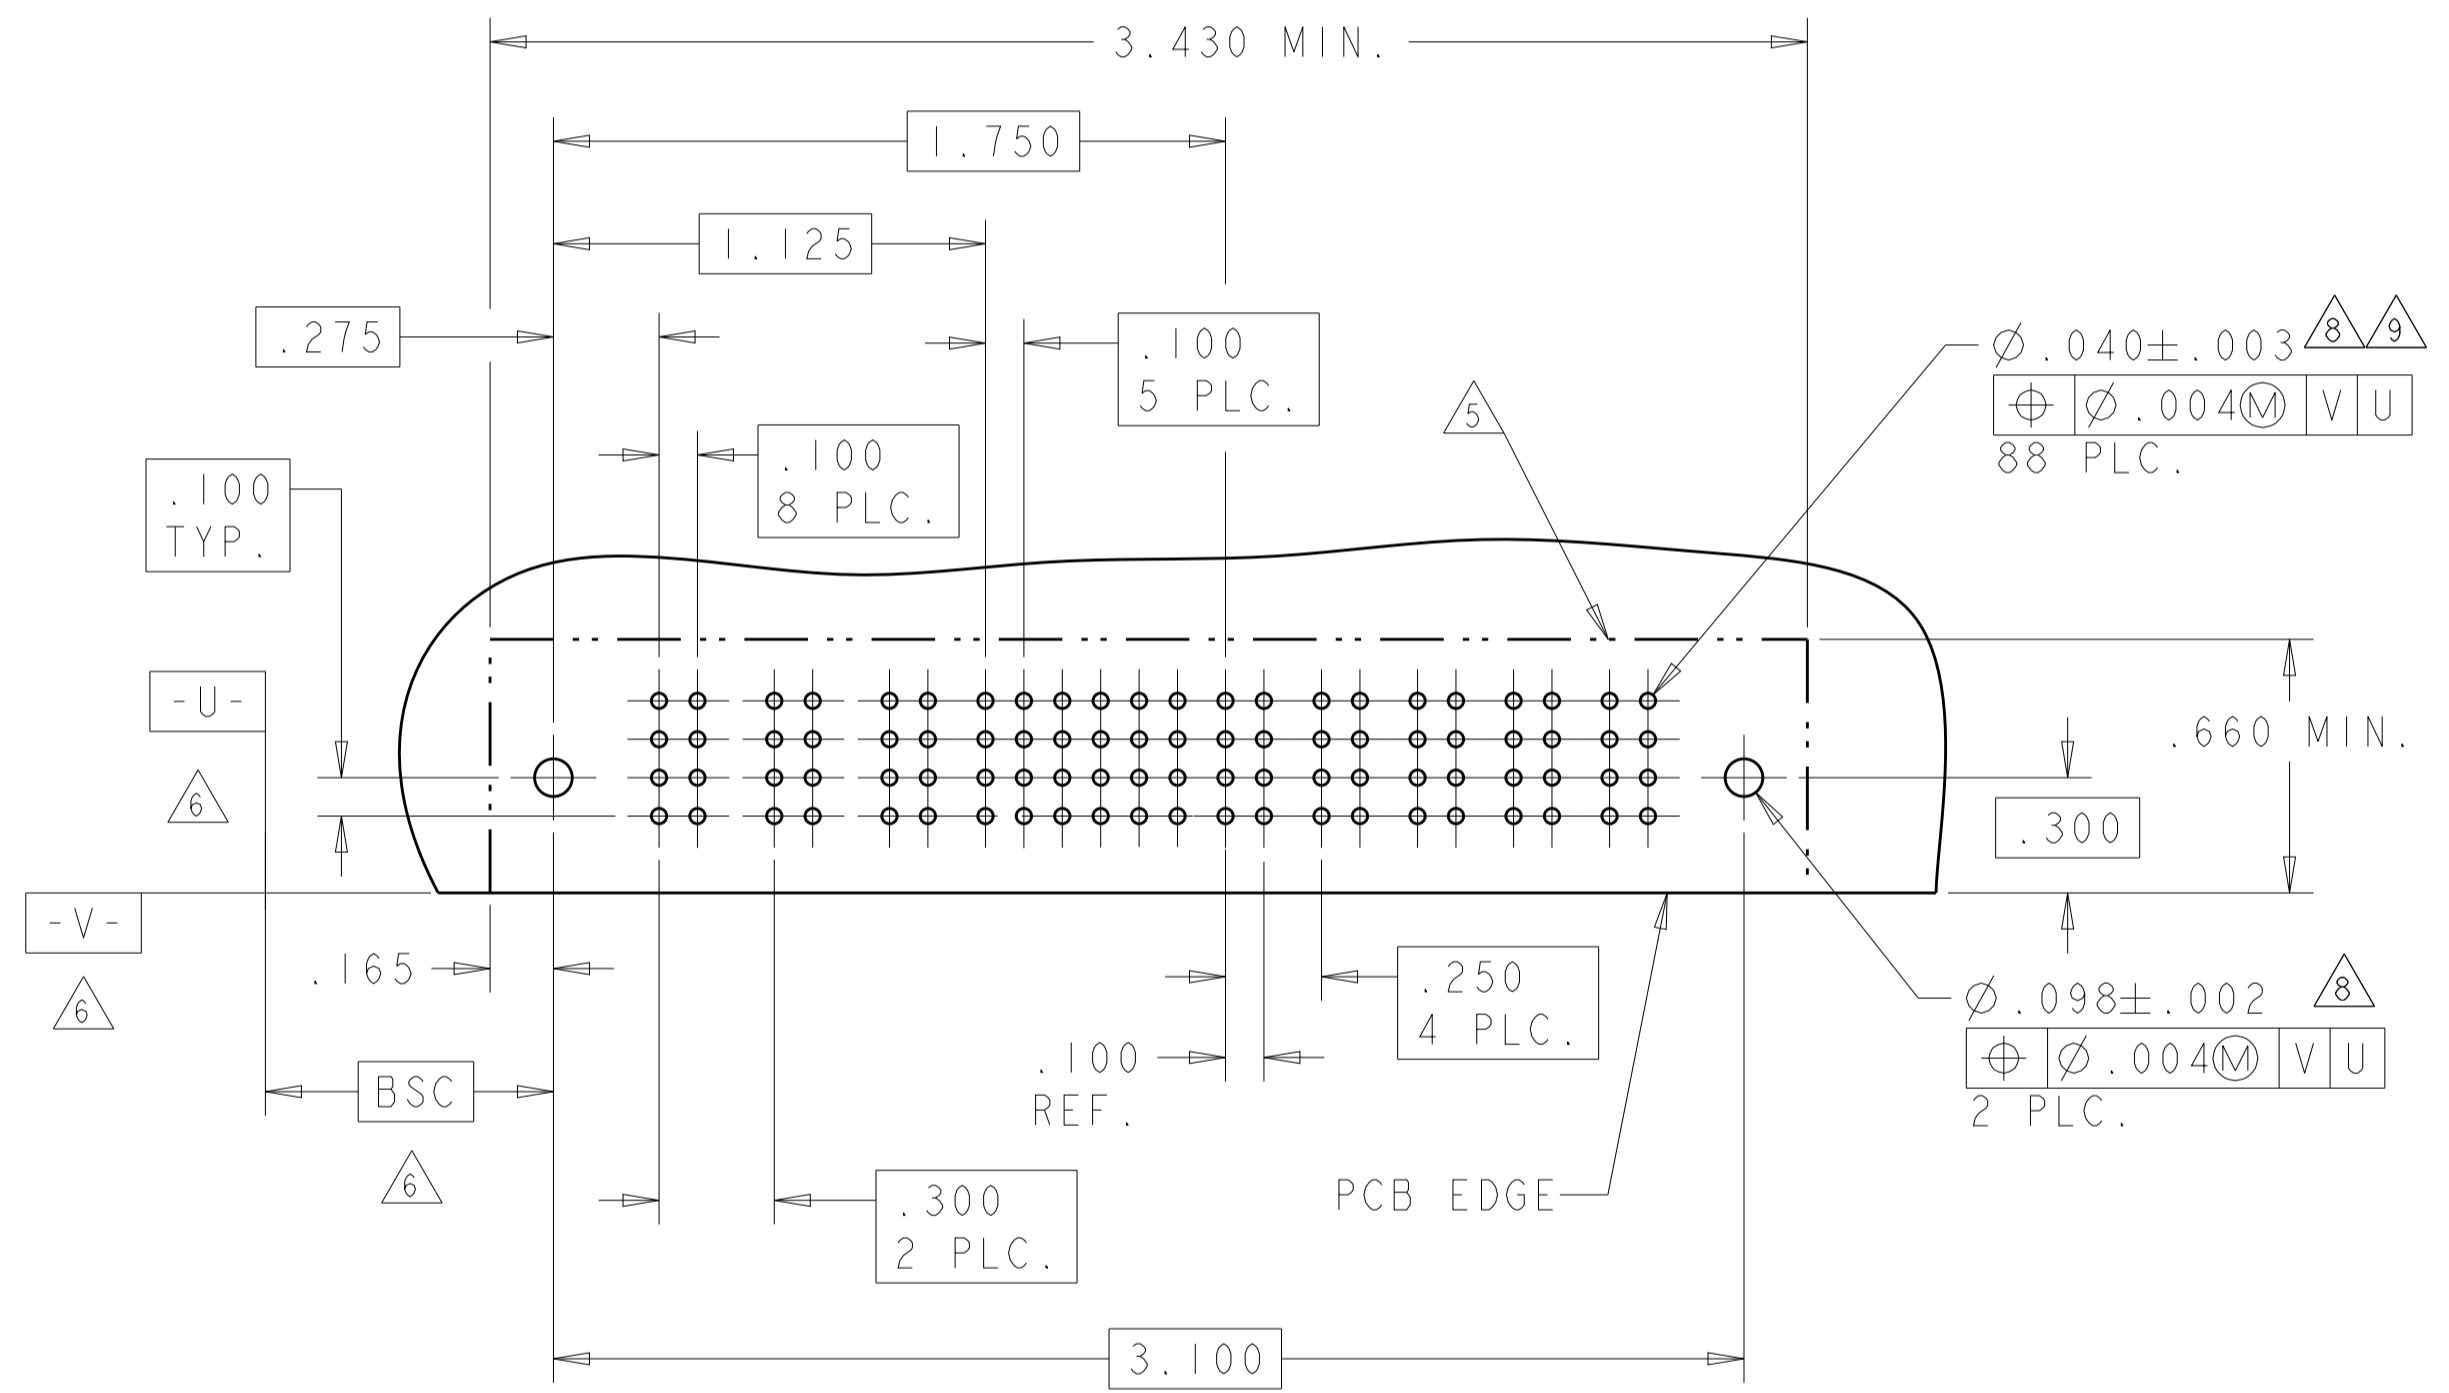

FN	MFBL	.135	B
E	MLBF	.135	D
F	MLBF	.135	C
G	MLBF	.135	B
H	MLBF	.135	A
J	STD	.135	D
K	STD	.135	C
N	STD	.135	B
S	STD	.135	A
CODE	MATING SEQUENCE	TAIL LENGTH	ROW

SIGNAL CONTACT

TS	.135	DUAL-BEAM(11)
PS	.135	DUAL-BEAM(1)
CODE	TAIL LENGTH	DESCRIPTION
POWER CONTACT		


DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	±	1 PLC	±.01
2 PLC	±.01	3 PLC	±.005
4 PLC	±.0020	ANGLES	±.0020
FINISH		MATERIAL	
-		-	

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: R. GRZYBOWSKI	OTIMAROS
		CHK: M. PERCHERKE	OTIMAROS
		APVD: M. PERCHERKE	-
		PRODUCT SPEC	108-1973
		APPLICATION SPEC	114-13038
		WEIGHT	-
		CUSTOMER DRAWING	-


NAME: RIGHT ANGLE HEADER ASSEMBLY		RESTRICTED TO	
DUAL BEAM POWER CONTACT		-	
MULTI-BEAM XL		-	
SIZE: A1	CAGE CODE: -	DRAWING NO: C=6600130	REV: F3
SCALE: 4:1		SHEET 3 OF 12	

REVISIONS				
REV	DATE	BY	CHK	APP
-	-	-	-	-
-	-	-	-	-

PART NUMBER	ROWS	POWER										SIGNAL												POWER																			
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	
6600130-3	D C B A	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS
		HD																					HD																				
		10P + 84S + 10P																																									

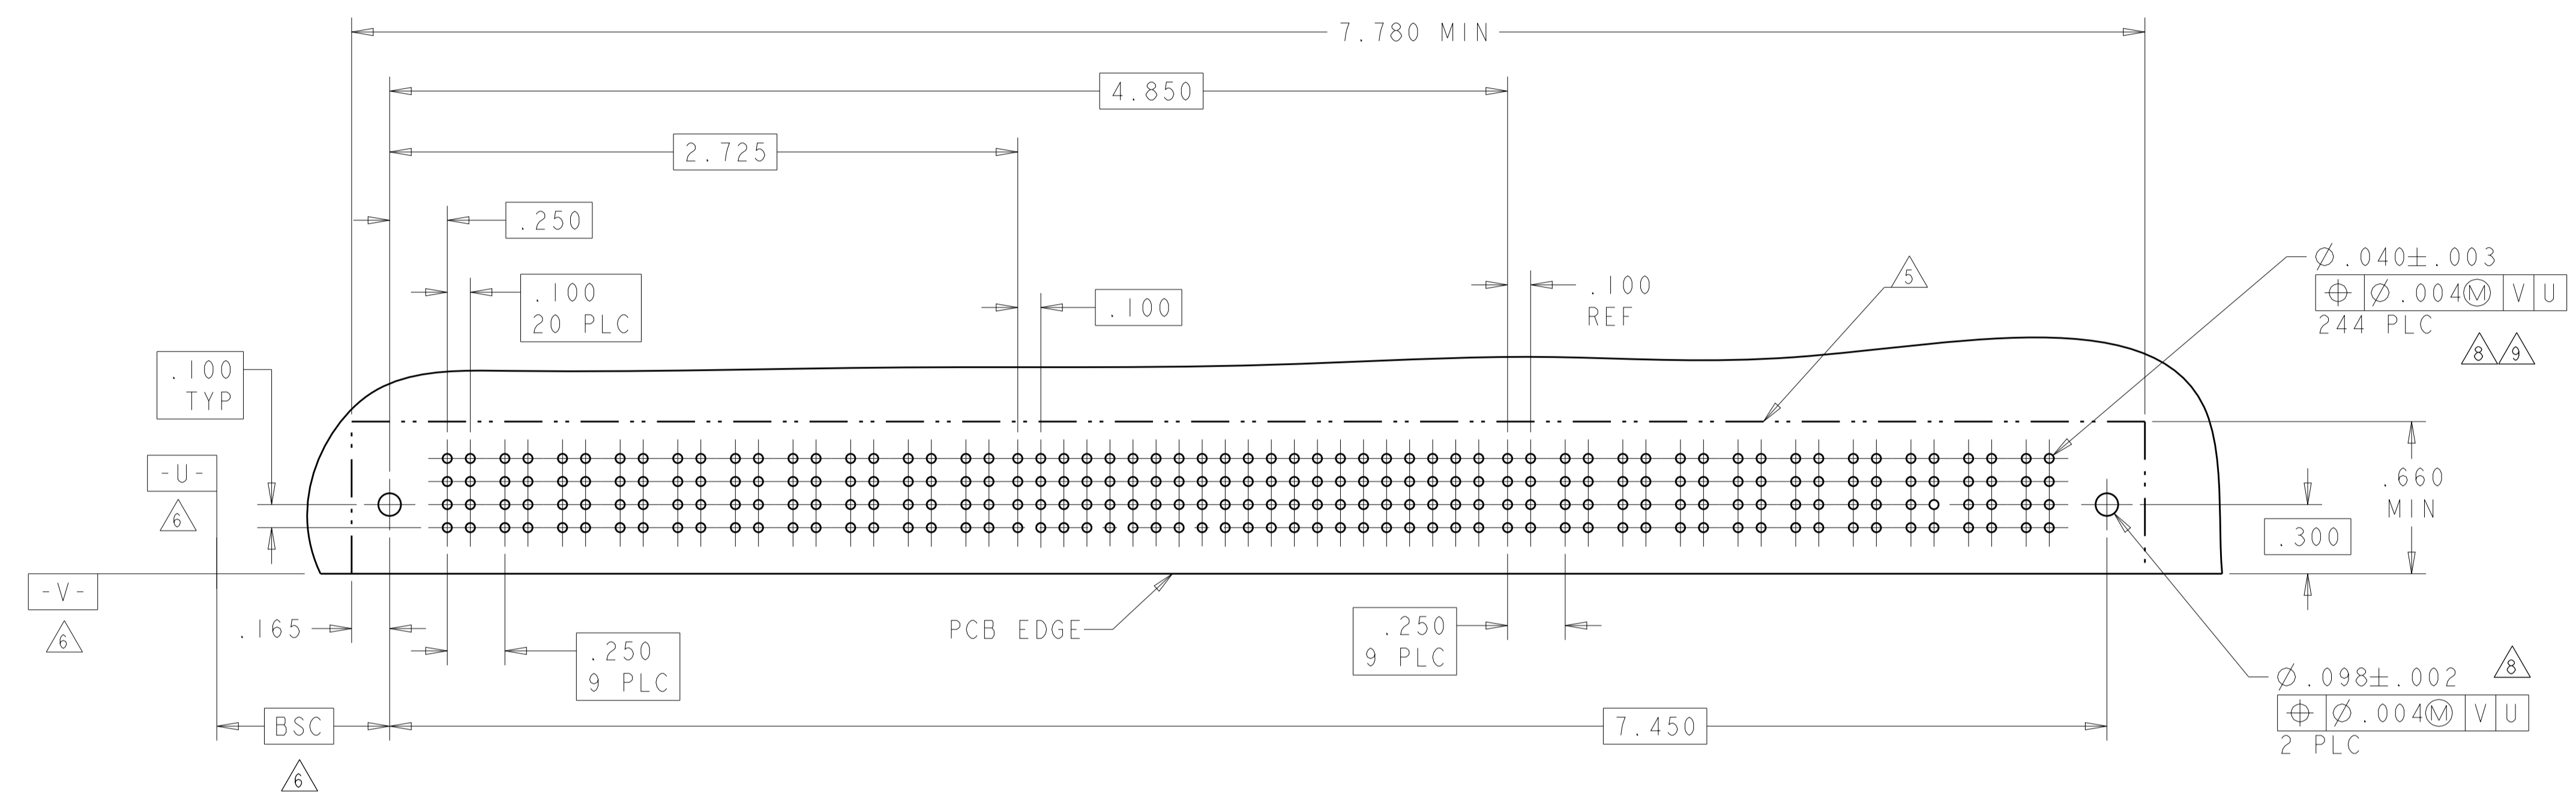

PART NUMBER	ROWS	POWER								SIGNAL								POWER									
		P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	P9	P10	P11	P12	P13	P14	P15	P16		
6600130-4	D C B A	PS	PS	PS	PS	PS	PS	PS	PS	J	J	J	J	J	J	J	J	PS	PS	PS	PS	PS	PS	PS	PS		
		HD																									HD
		8P + 32S + 8P																									


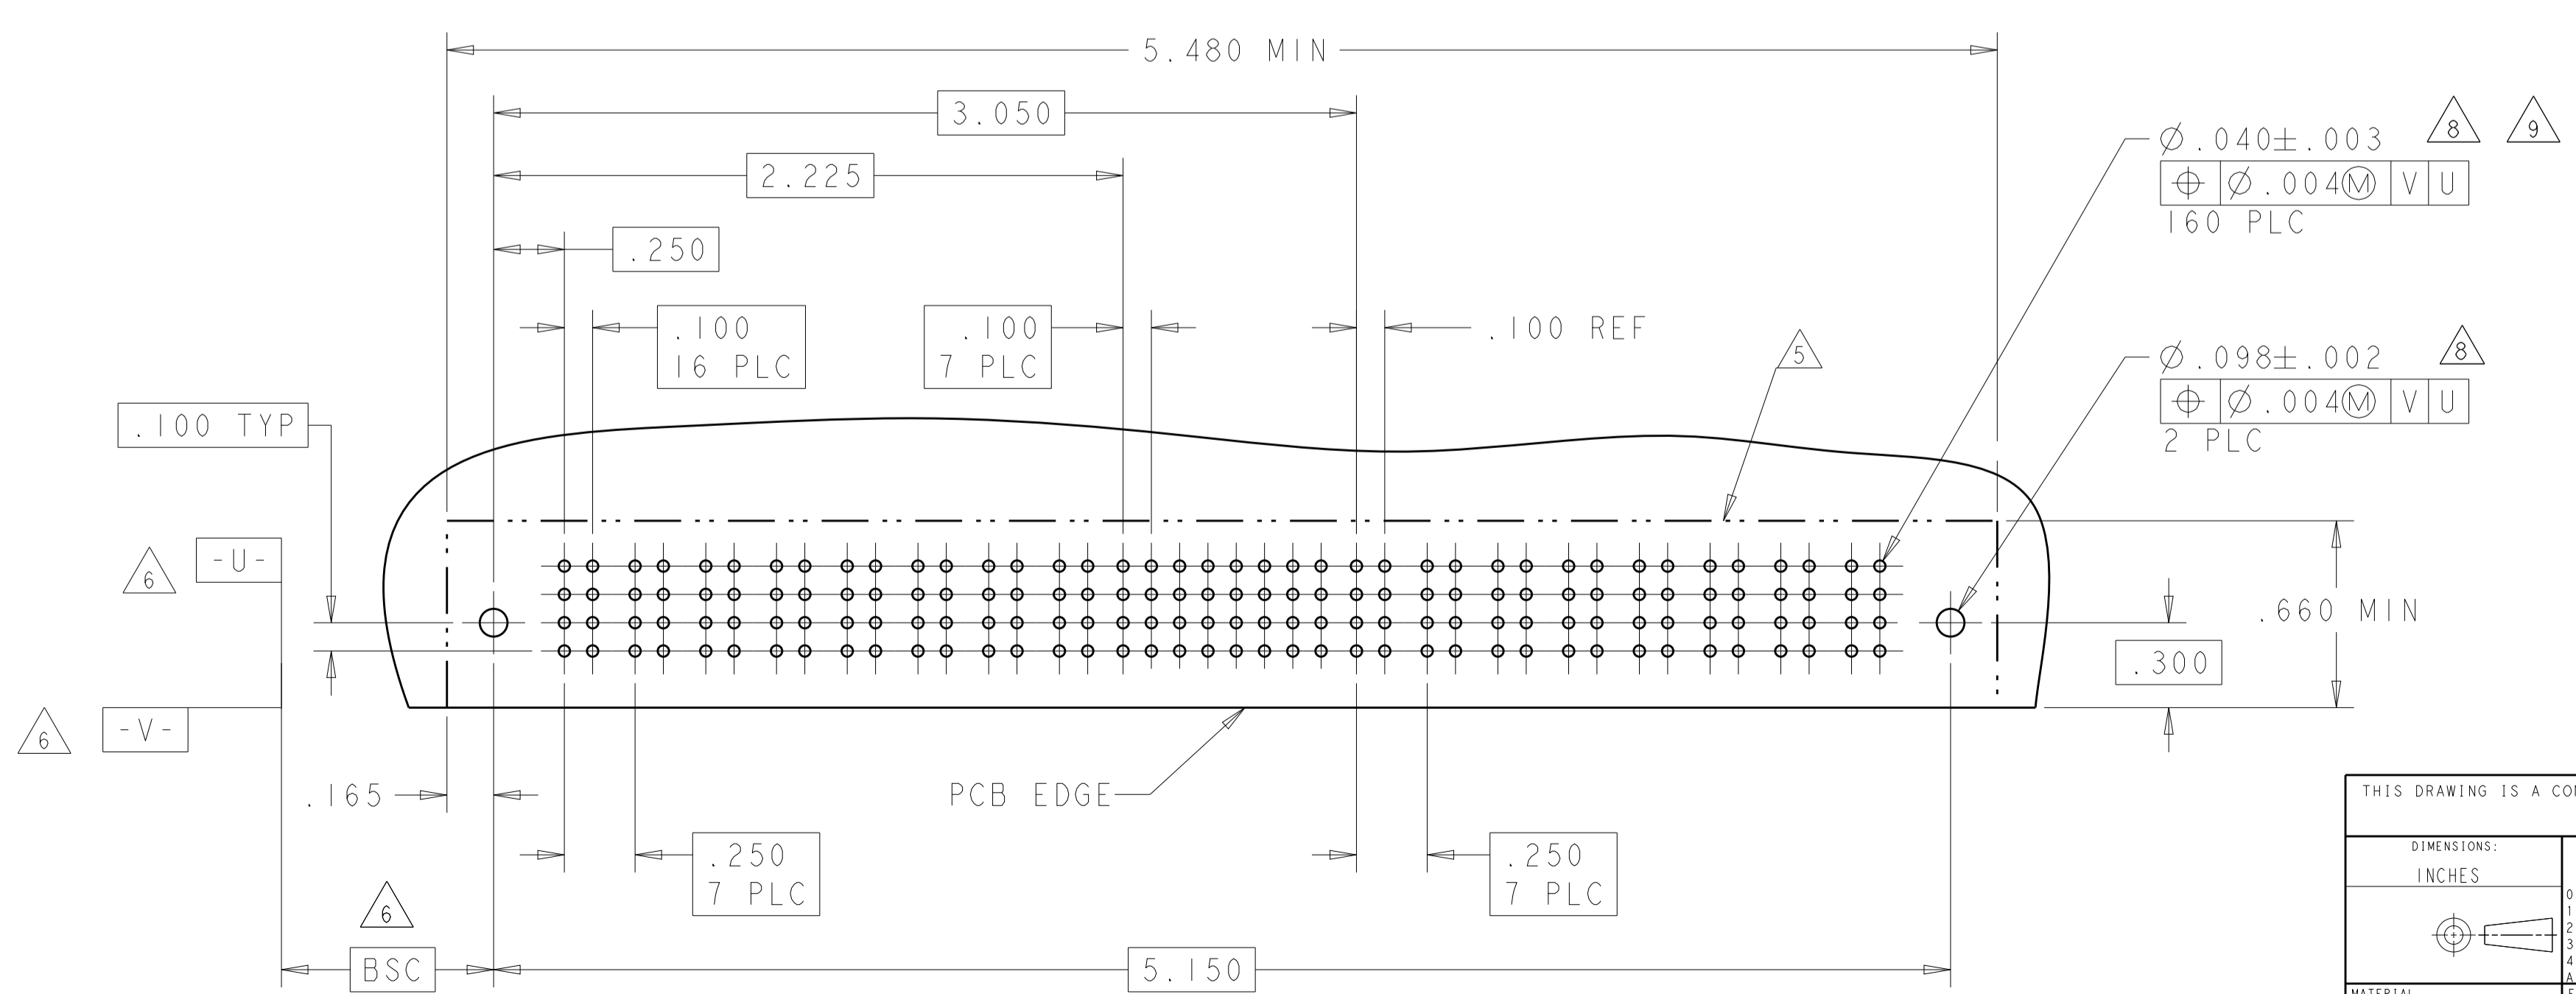


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. GRZYBOWSKI CHK M. PERCHERKE APP'D	OTMAROS OTMAROS	TE Connectivity RIGHT ANGLE HEADER ASSEMBLY DUAL BEAM POWER CONTACT MULTI-BEAM XL
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002 ANGLES ±.2°	PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	NAME	
MATERIAL	FINISH	WEIGHT	SIZE A1	
CUSTOMER DRAWING		SCALE 4:1 SHEET 4 OF 12 REV F3		


REVISIONS				
P. LTM	DESCRIPTION	DATE	OWN	APVD
-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER							SIGNAL								POWER								
		P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6	7	8	P8	P9	P10	P11	P12	P13			
6600130-5	D C B A	PS	PS	PS	PS	PS	PS	PS	J	J	J	J	E	J	J	J	PS	PS	PS	PS	PS	PS			
		PS	PS	PS	PS	PS	PS	PS	K	K	F	K	K	K	K	PS	PS	PS	PS	PS	PS				
		PS	PS	PS	PS	PS	PS	PS	N	N	N	N	N	G	N	N	PS	PS	PS	PS	PS	PS			
		HD								S	S	H	S	S	S	S									HD
7P + 32S + 6P																									

PART NUMBER	ROWS	POWER						SIGNAL						POWER						
		P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11		
6600130-6	D C B A	PS	PS	PS	PS	PS	PS	J	J	J	J	E	J	PS	PS	PS	PS	PS		
		PS	PS	PS	PS	PS	PS	K	K	F	K	K	K	PS	PS	PS	PS	PS		
		PS	PS	PS	PS	PS	PS	N	N	N	N	N	G	PS	PS	PS	PS	PS		
		HD							S	S	H	S	S	S						HD
6P + 24S + 5P																				

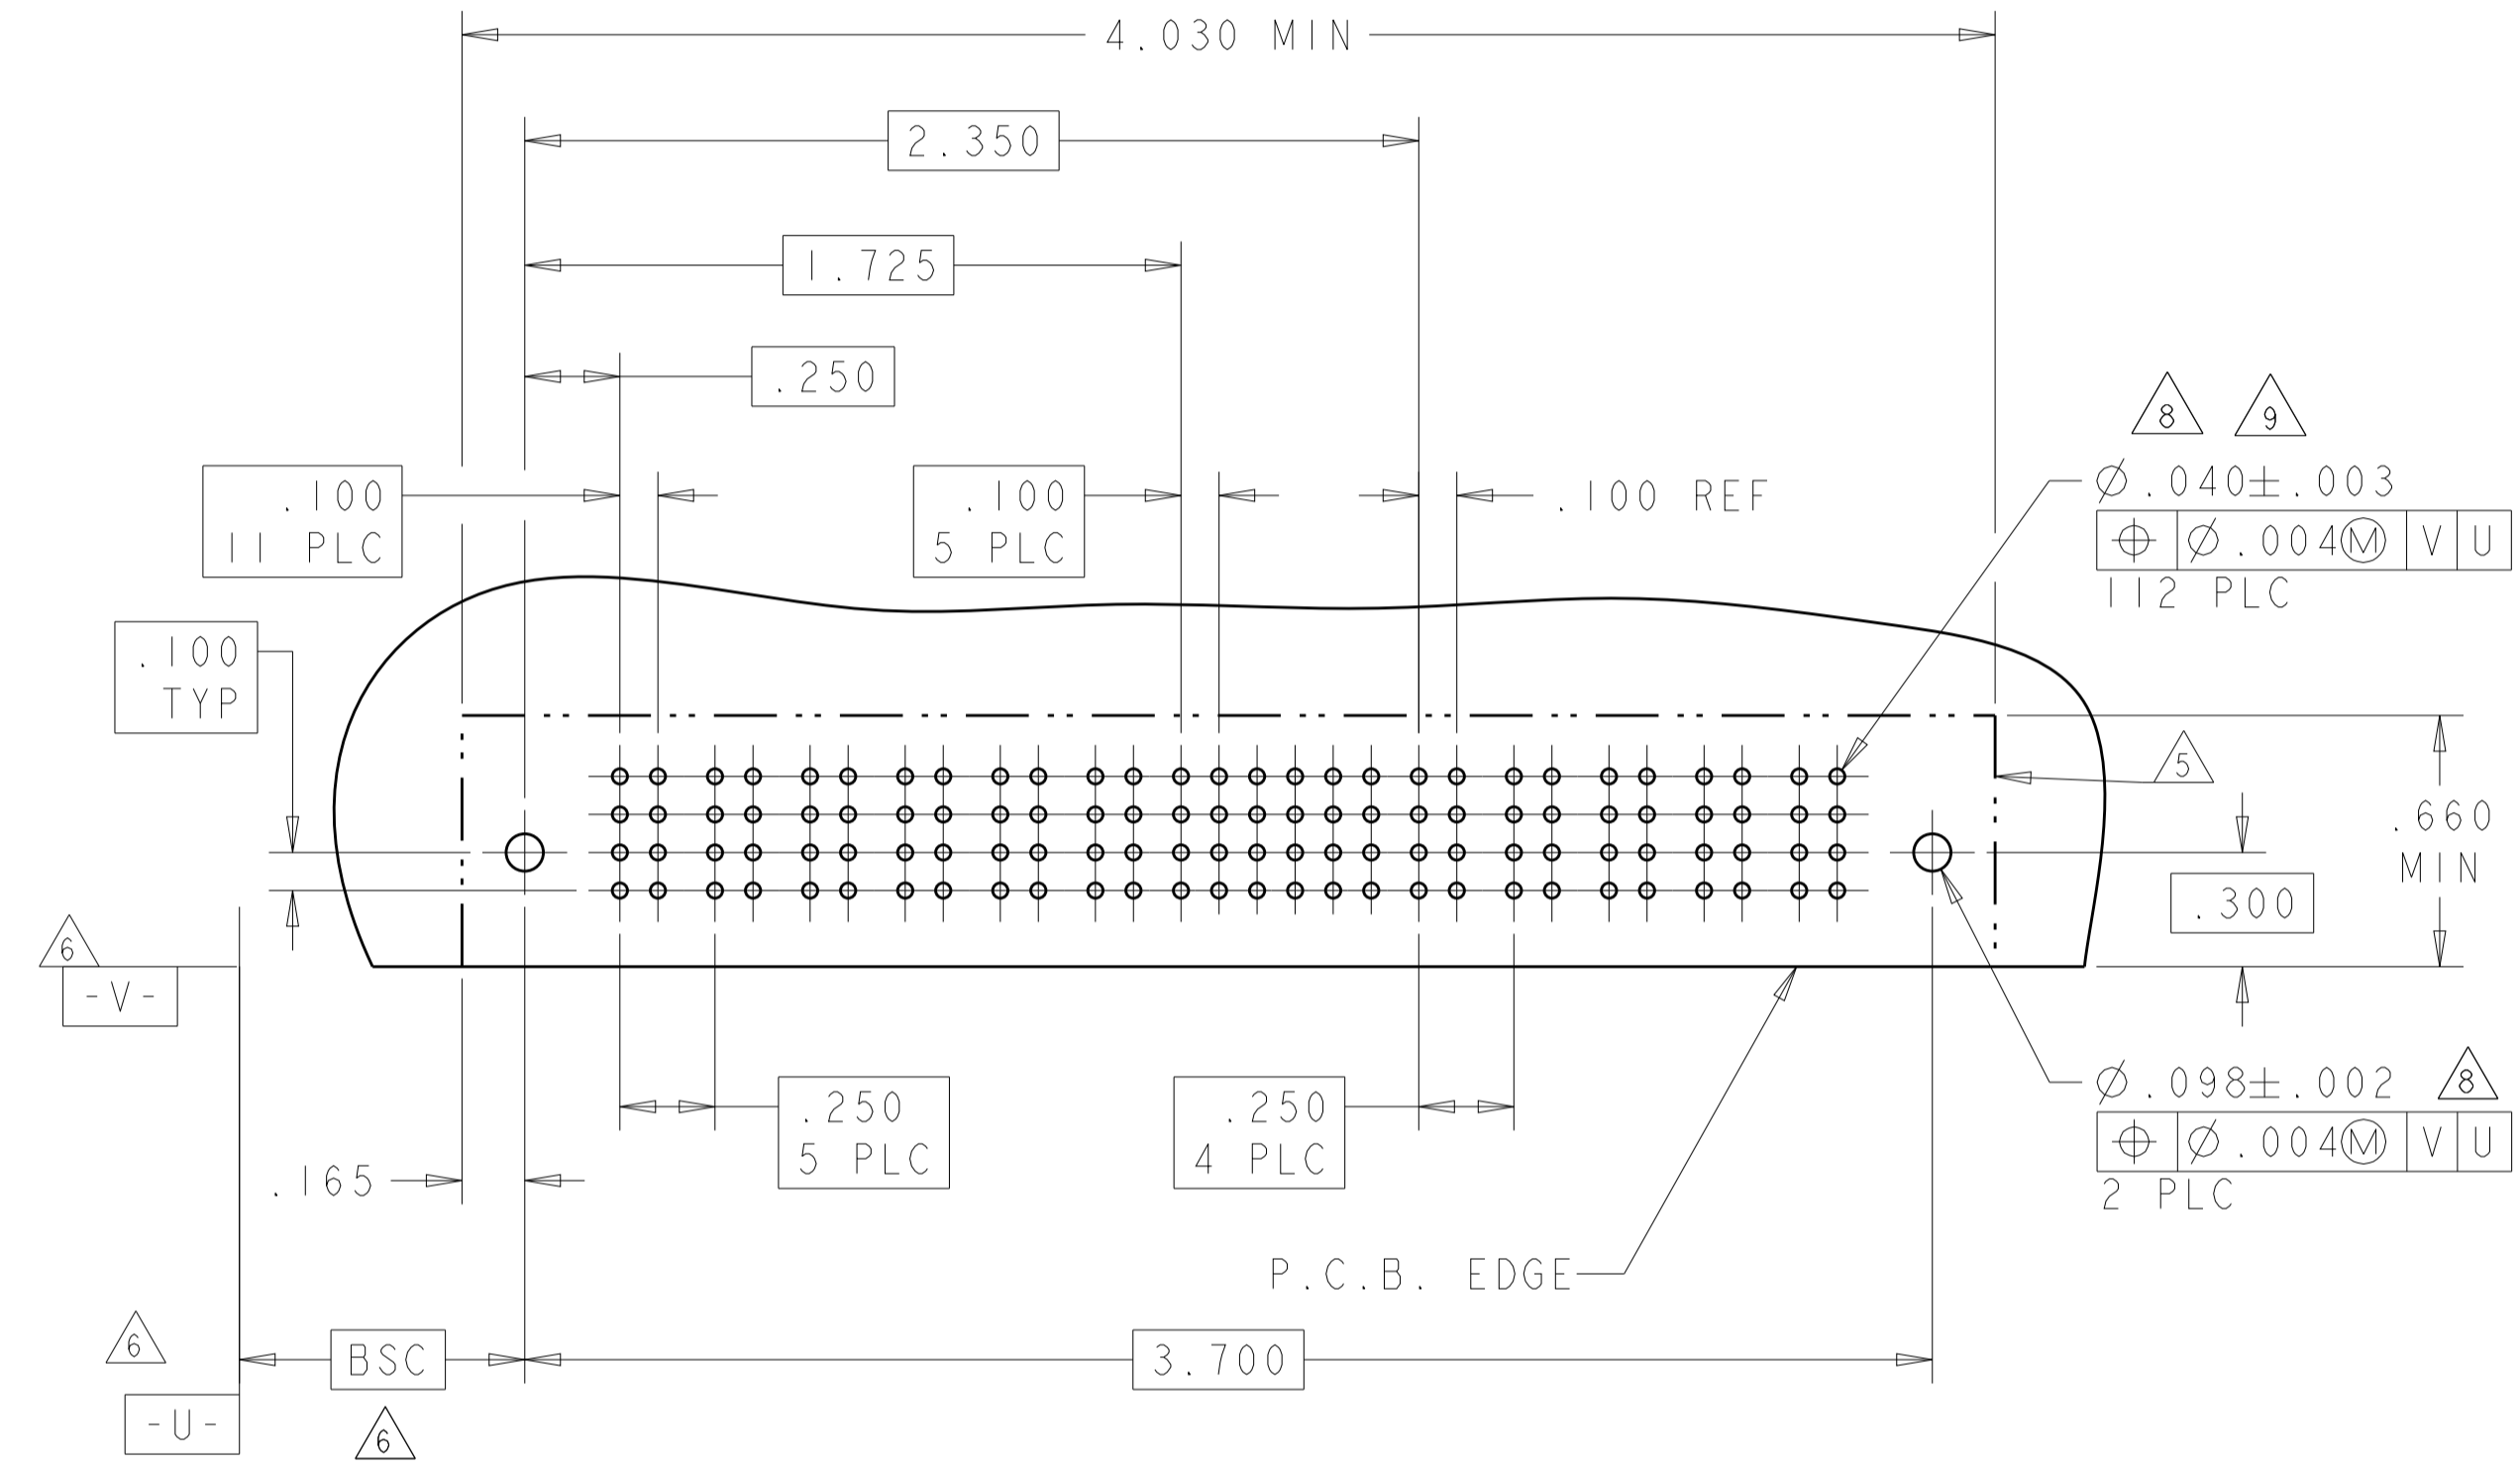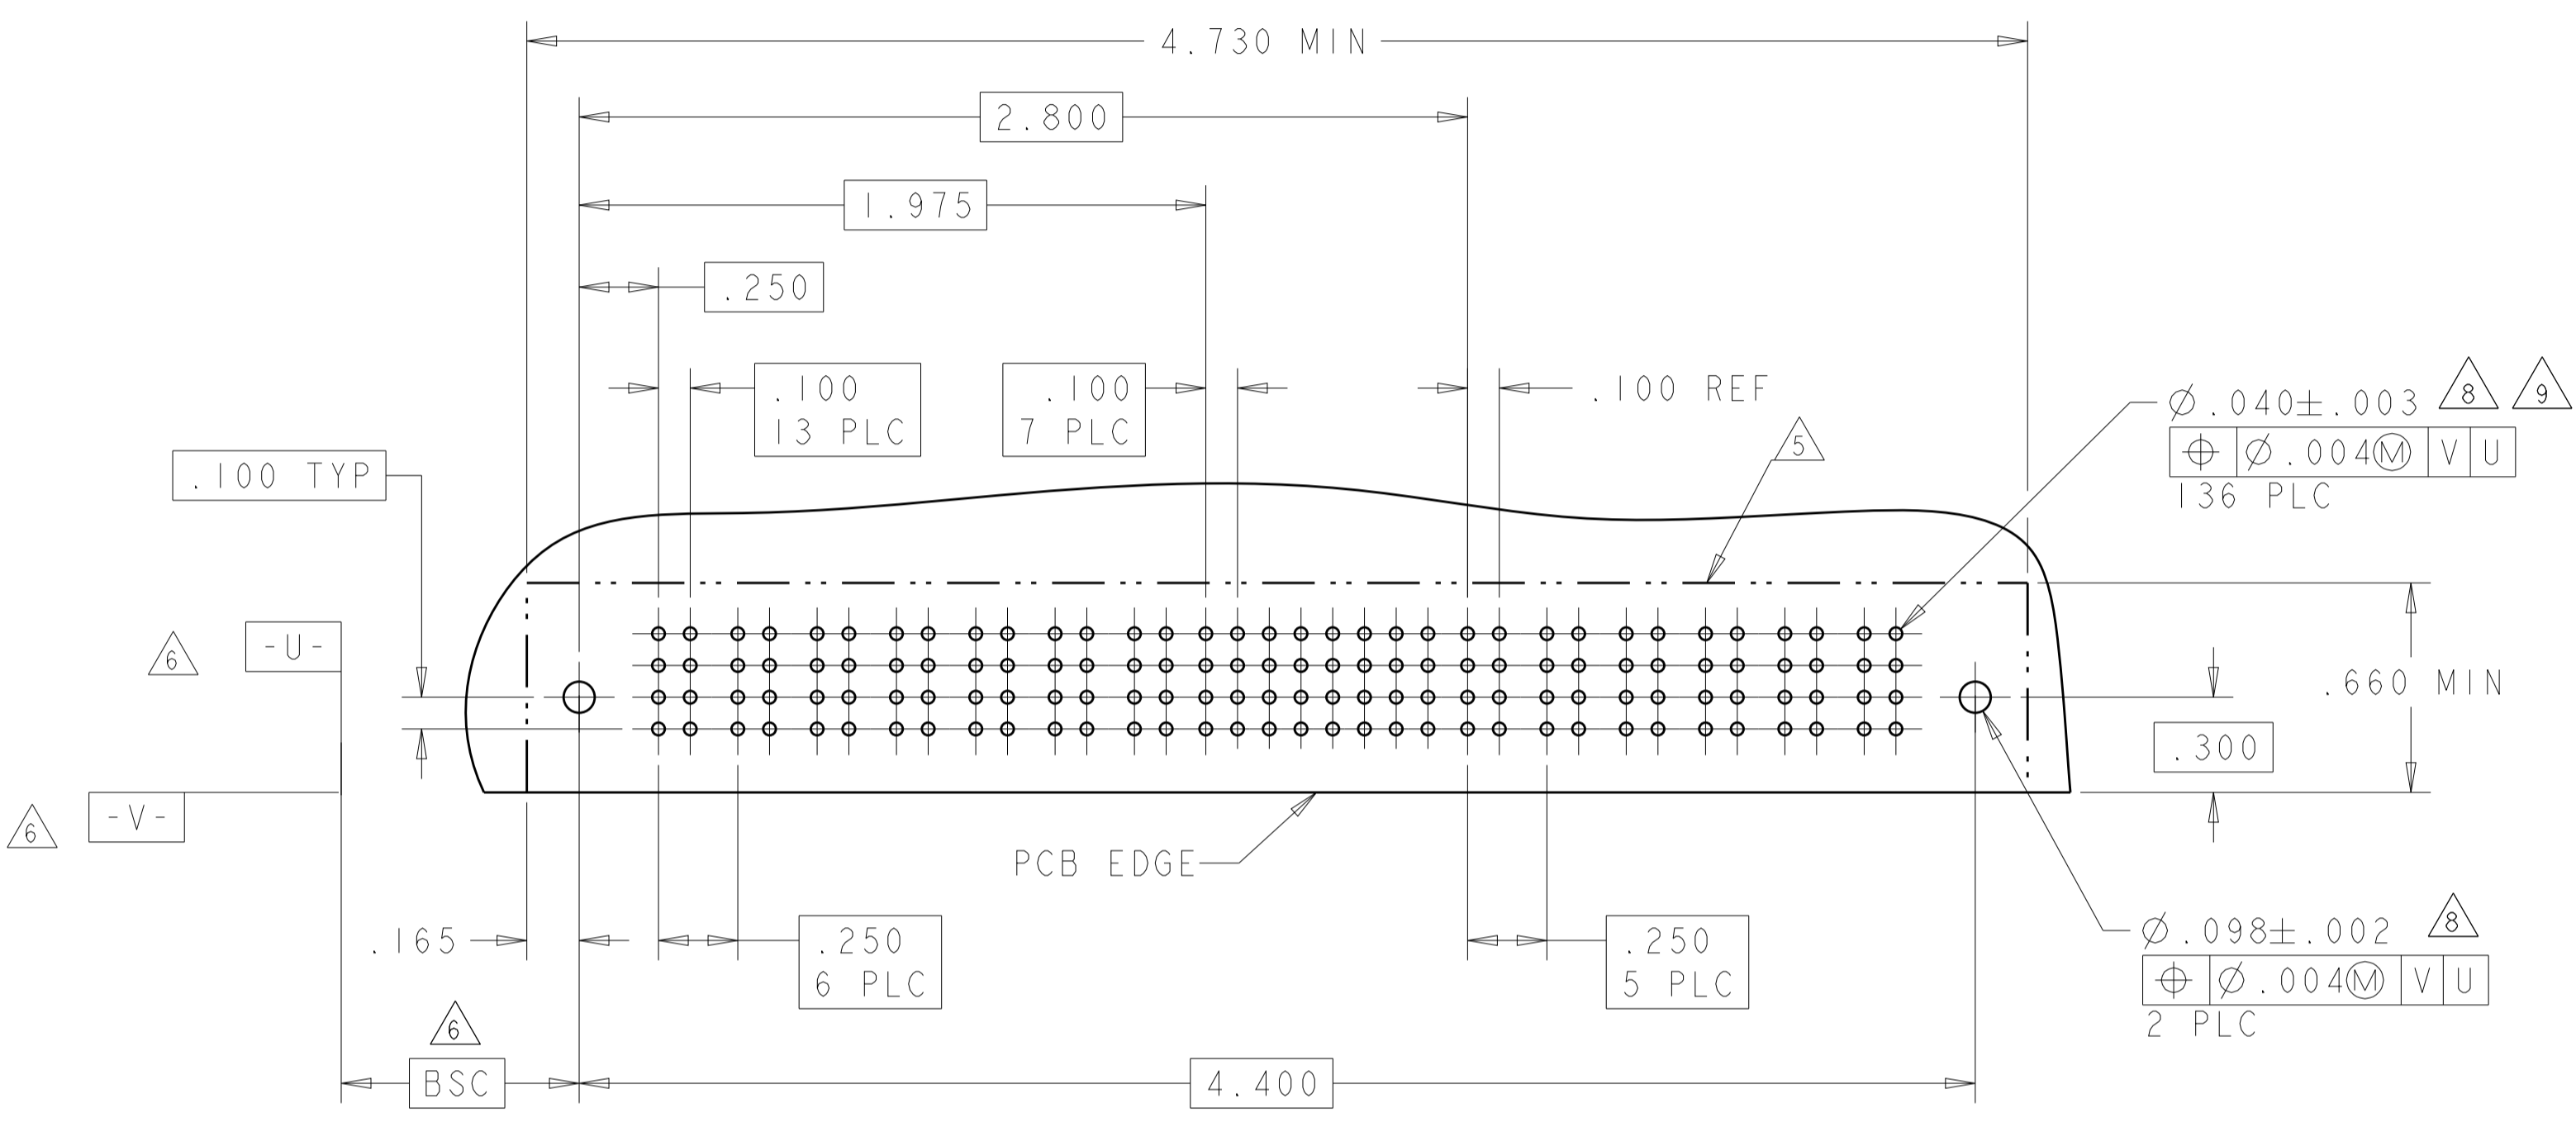

PART NUMBER	ROWS	POWER										SIGNAL						POWER													
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22		
6600130-8	D C B A	PS	PS	PS	PS	PS	PS	PS	PS	PS	J	J	J	J	J	J	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS				
		PS	PS	PS	PS	PS	PS	PS	PS	PS	K	K	K	K	K	K	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS				
		PS	PS	PS	PS	PS	PS	PS	PS	PS	N	N	N	N	N	N	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS	PS				
		HD											S	H	S	S	S	S													HD
10P + 24S + 12P																															

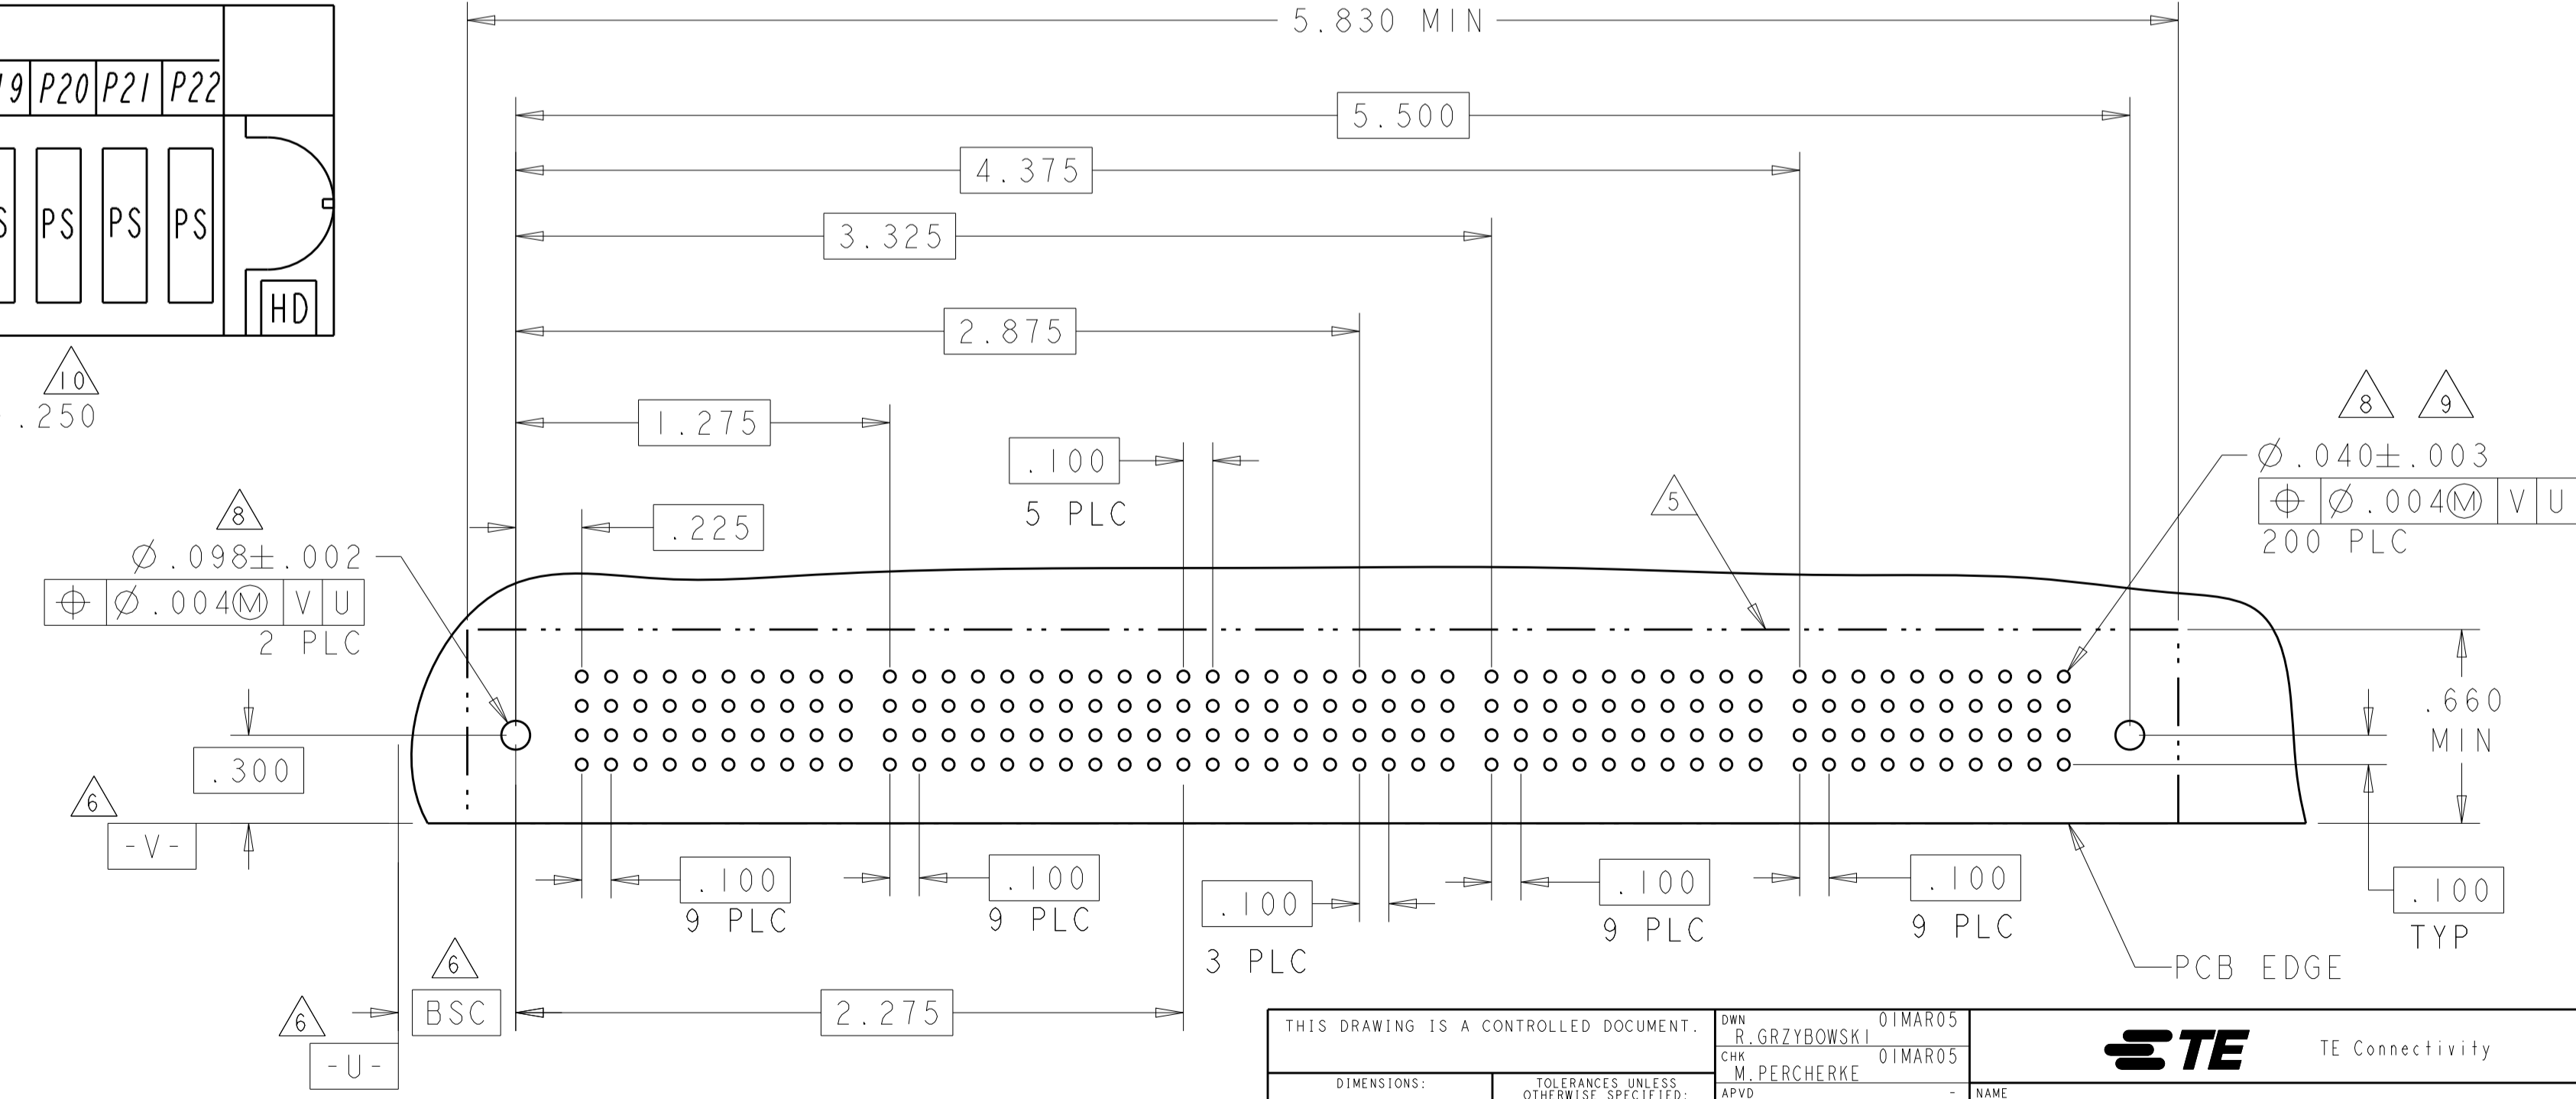



THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .01, 1 PLC ± .01, 2 PLC ± .01, 3 PLC ± .005, 4 PLC ± .002, ANGLES ± .0020. MATERIAL: FINISH: CUSTOMER DRAWING.

OWN: R. GRZYBOWSKI CHK: M. PERCHERKE APVD: M. PERCHERKE	DTMAROS DTMAROS DTMAROS
NAME: RIGHT ANGLE HEADER ASSEMBLY PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038	SIZE: A1 CAGE CODE: 6600130 SCALE: 4:1
TE Connectivity	SHEET 5 OF 12 REV F3

REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS	POWER						SIGNAL					POWER								
		P1	P2	P3	P4	P5	P6	1	2	3	4	5	P7	P8	P9	P10	P11	P12			
I-6600130-1	D C B A	HD	TS	TS	TS	TS	TS	TS	E	J	J	J	J	TS	TS	TS	TS	TS	TS		
									F	K	K	K	K								
									G	N	N	N	N								
									H	S	S	S	H								
6P + 20S + 6P																					

PART NUMBER	ROWS	POWER						SIGNAL				POWER		
		P1	P2	P3	P4	P5	P6	1	2	3	4	P7	P8	
I-6600130-3	D C B A	HD	PS	PS	PS	PS	PS	PS	E	E	E	E	PS	PS
									F	F	F	F		
									N	N	N	N		
									H	H	H	H		
6P + 16S + 2P														

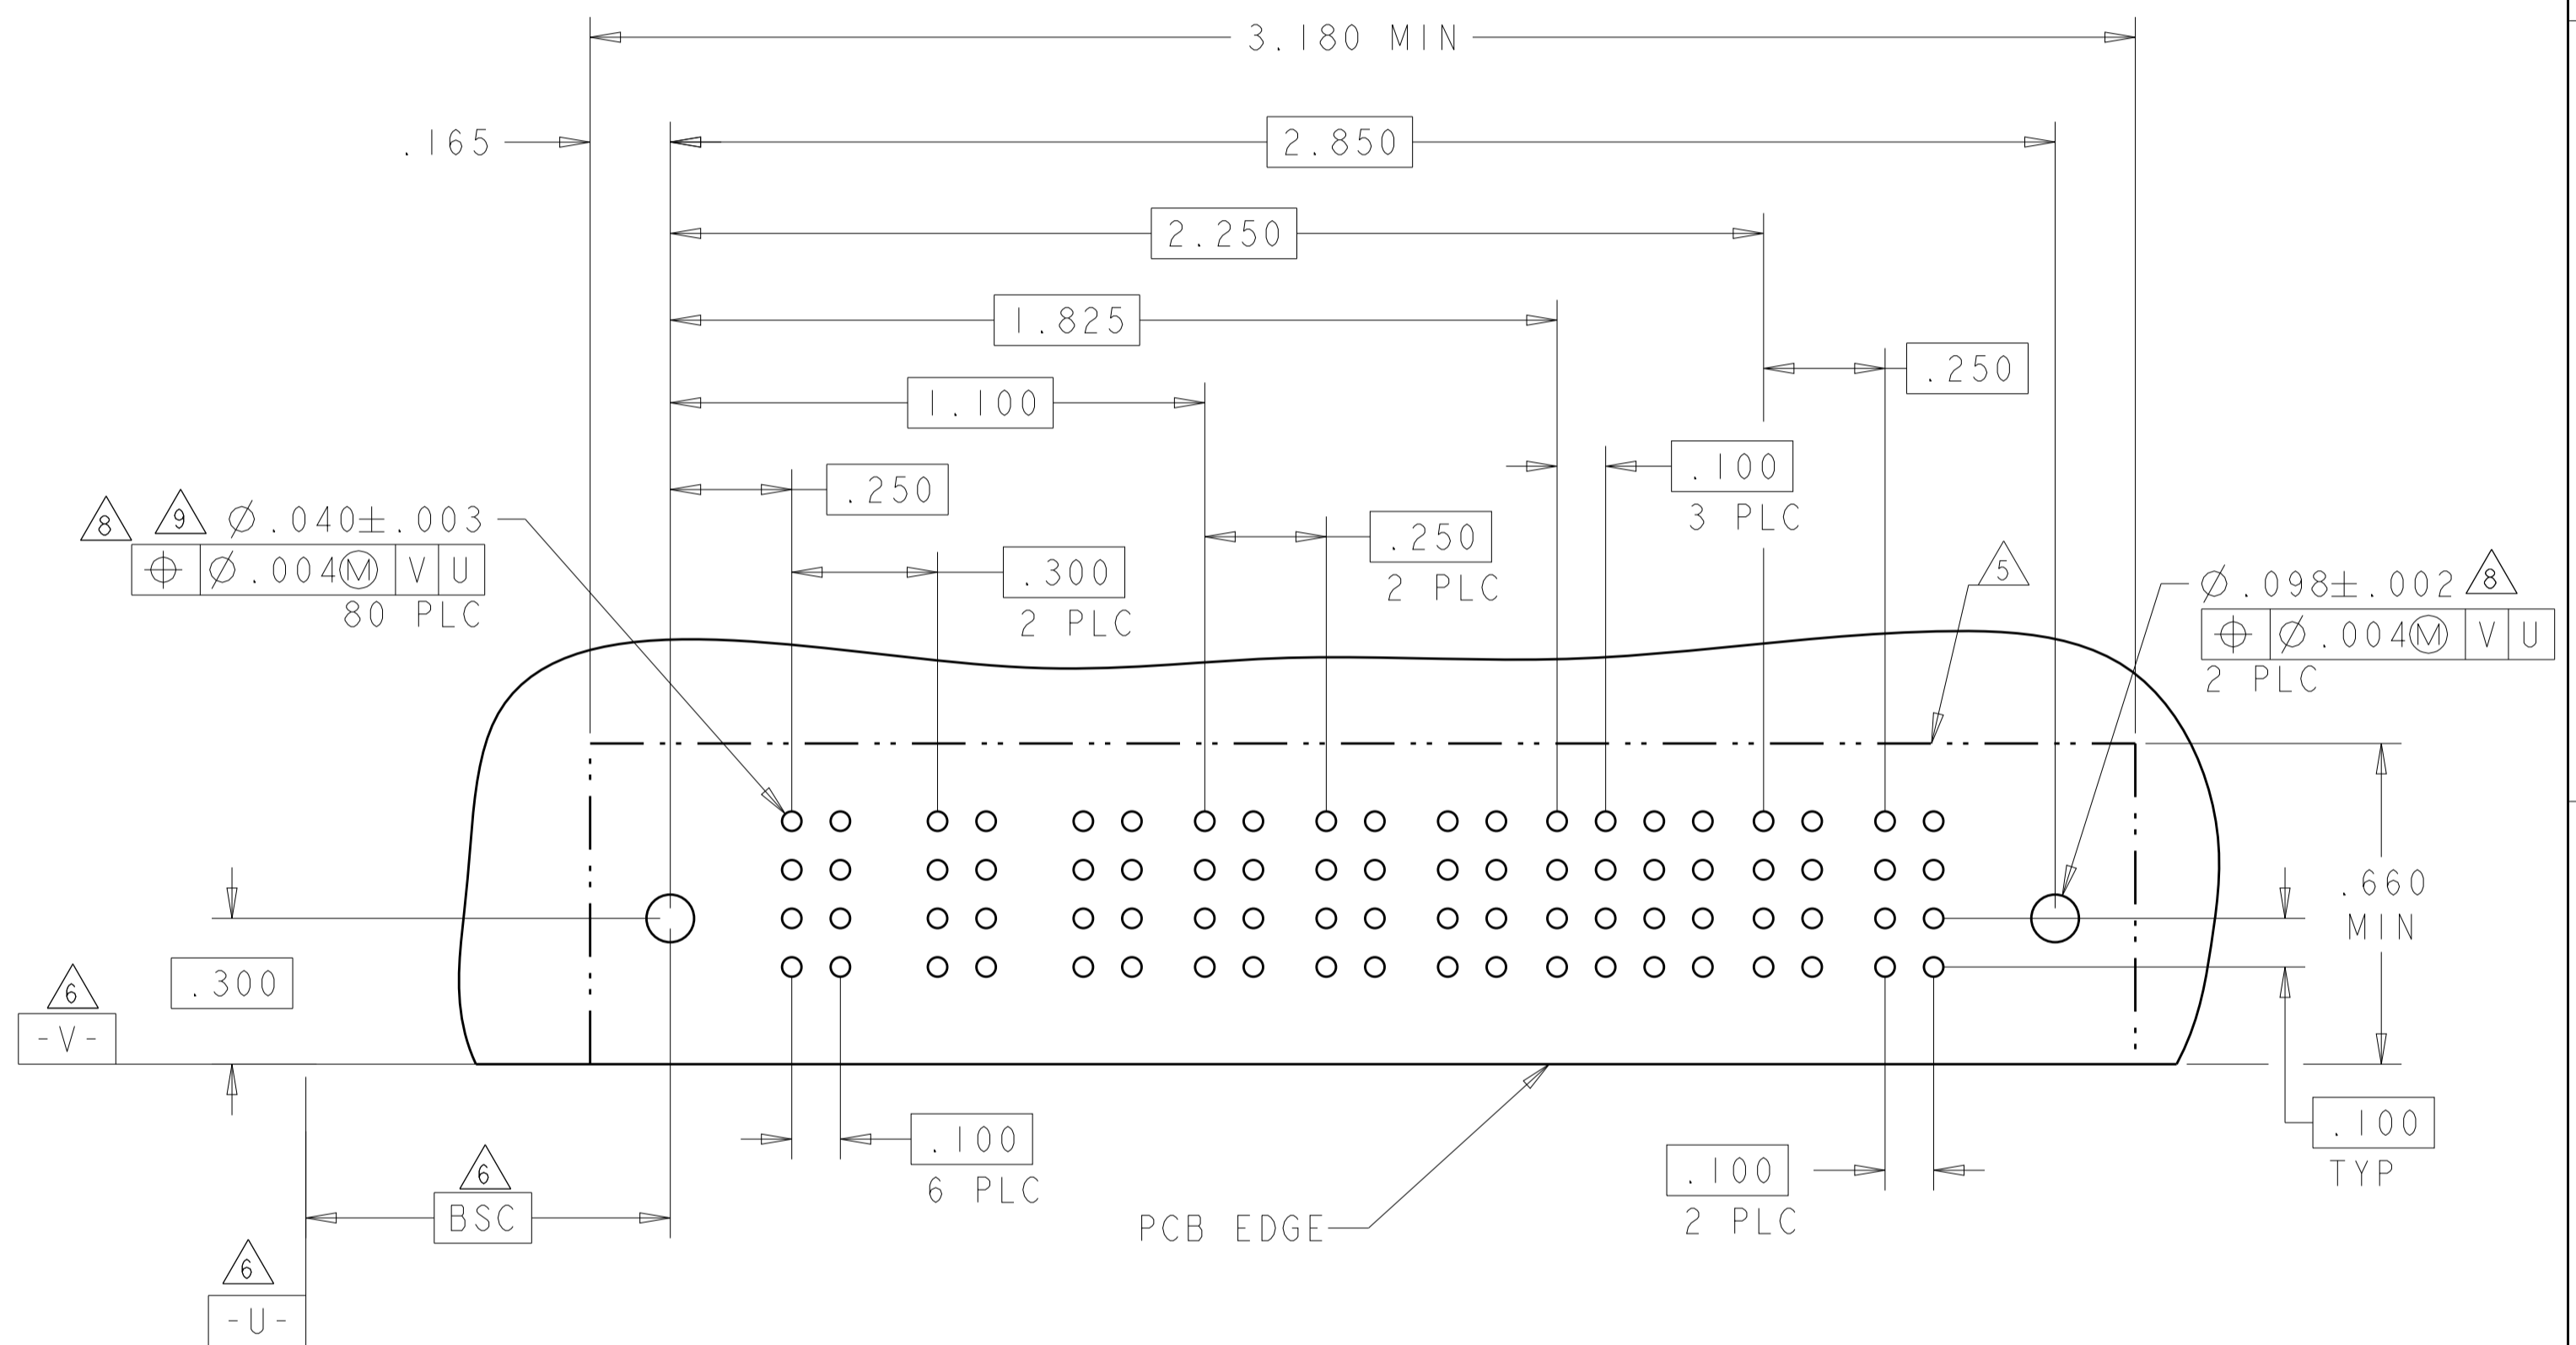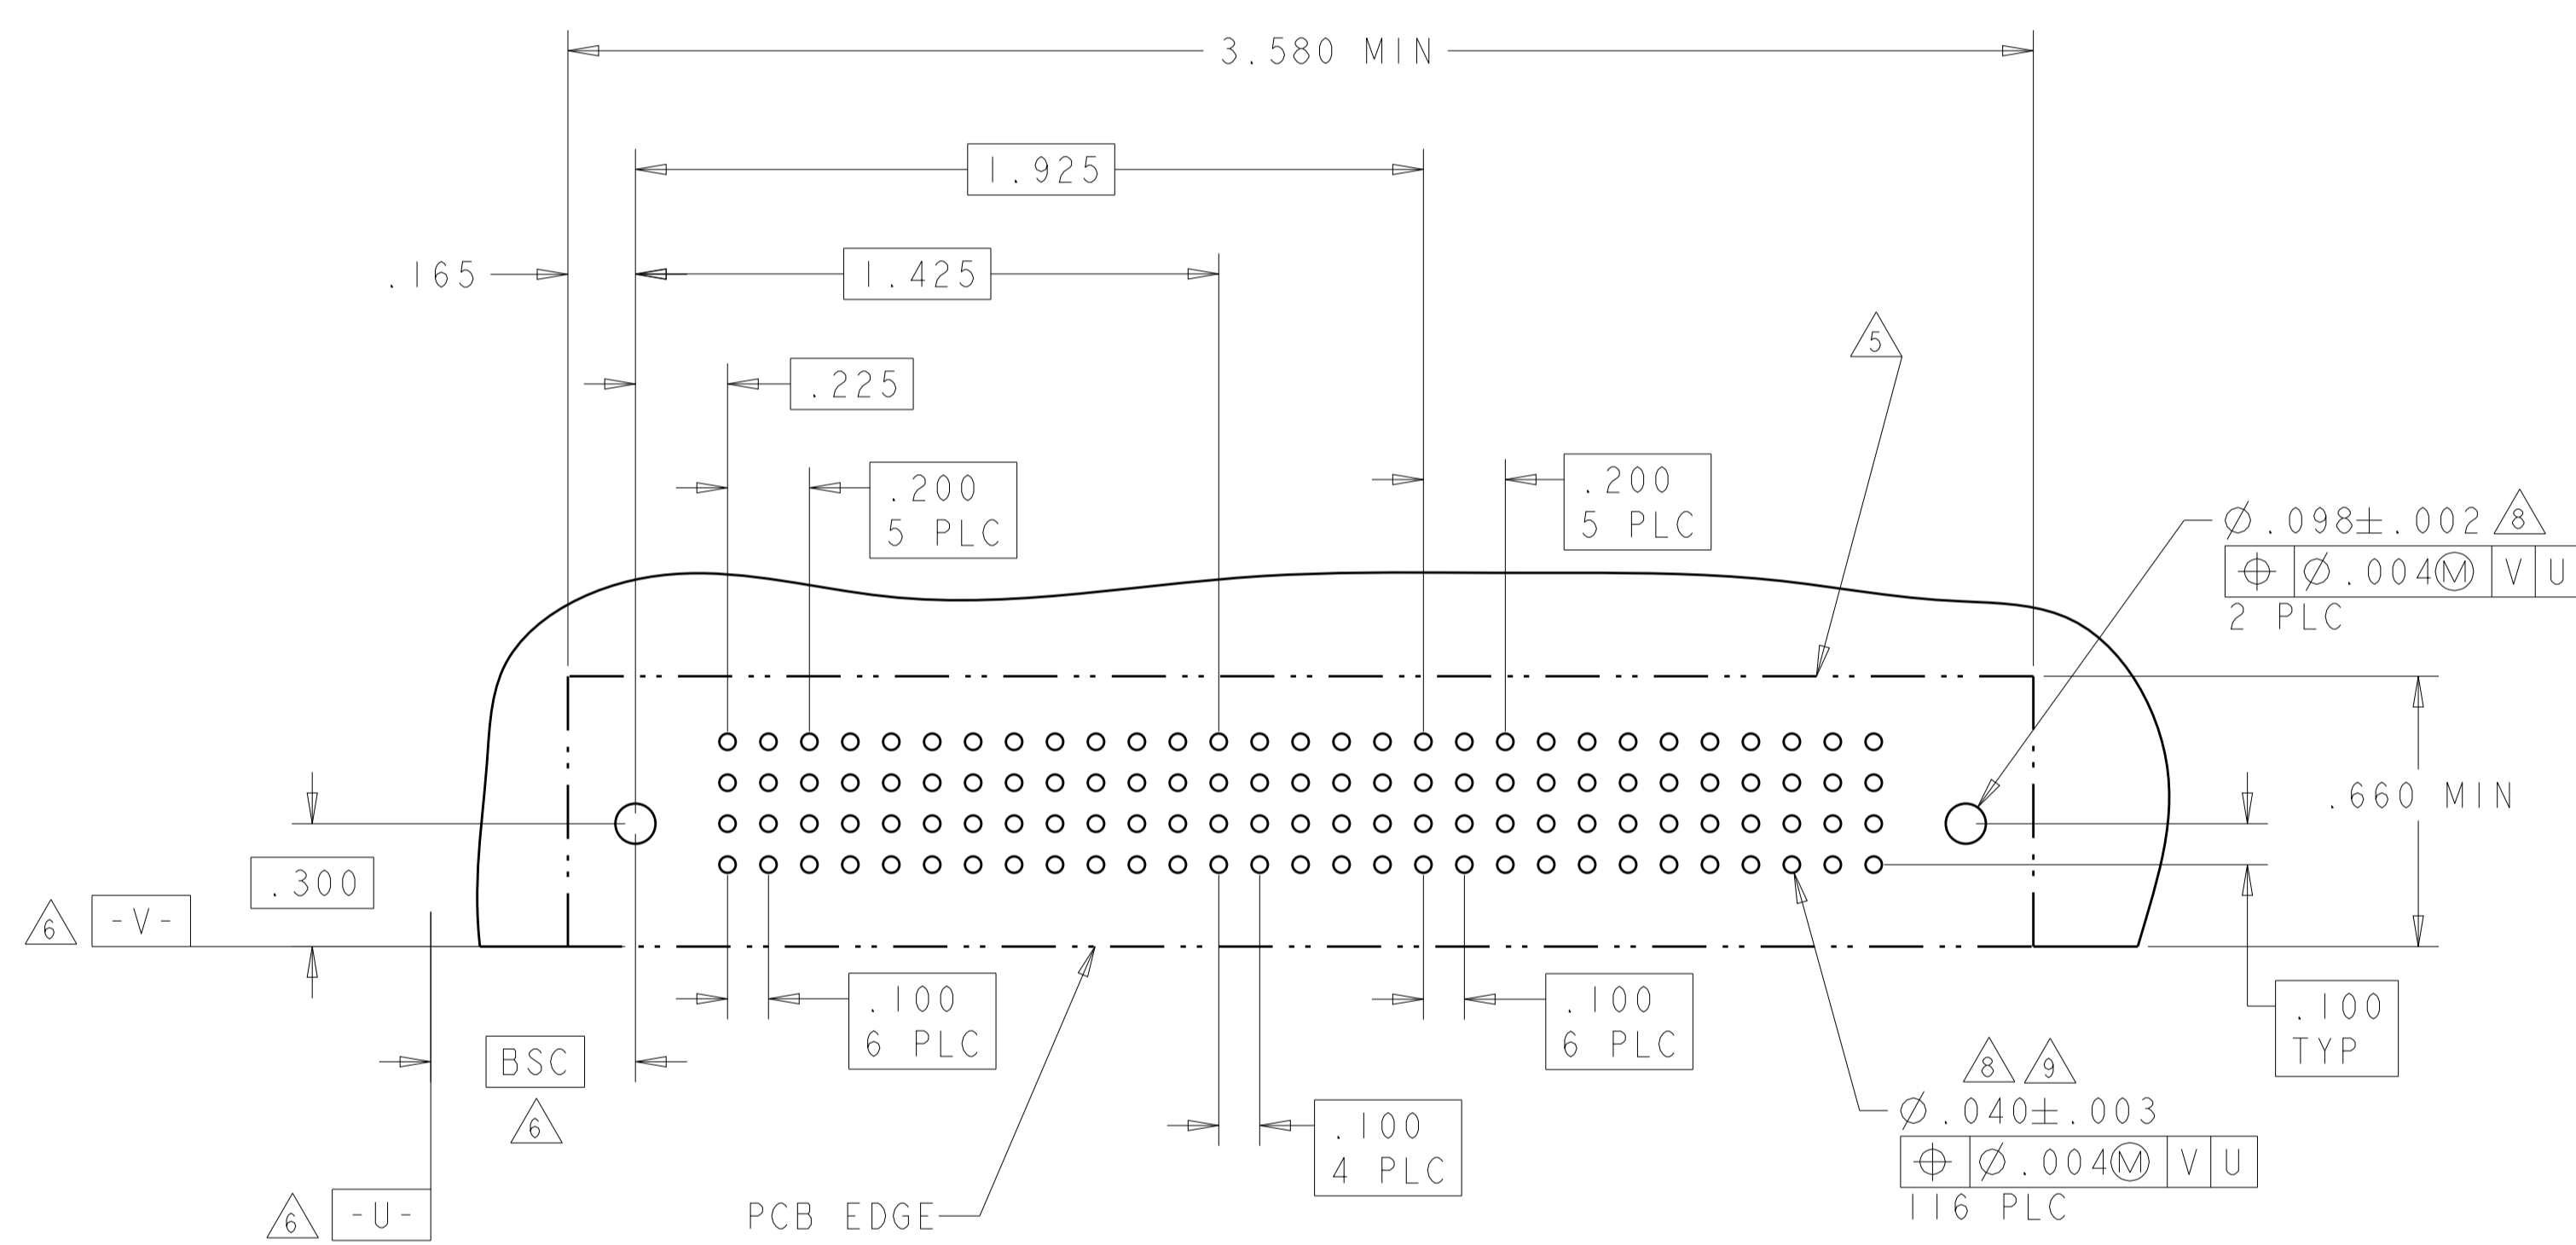



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. GRZYBOWSKI CHK: M. PERCHERKE APVD: M. PERCHERKE	DIMENSIONS: INCHES 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2°	DIMAROS DIMAROS NAME: M. PERCHERKE PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT: - CUSTOMER DRAWING	NAME: RIGHT ANGLE HEADER ASSEMBLY DUAL BEAM POWER CONTACT MULTI-BEAM XL SIZE: A1 CAGE CODE: - DRAWING NO: 6600130 SCALE: 4:1 SHEET: 6 OF 12 REV: F3	TE Connectivity
--	--	---	---------------------------	---	--	---	-----------------

REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS	POWER				SIGNAL						POWER'	
		P1	P2	P3	P4	1	2	3	4	5	6	P5	P6
1-6600130-4	D C B A	PS	PS	PS	PS	J	J	J	J	J	J	PS	PS
						K	K	K	K	K	K		
						N	N	N	N	N	N		
		4P + 24S + 2P											

PART NUMBER	ROWS	POWER		SIGNAL				POWER			
		P1	P2	1	2	3	4	P5	P6	P5	P6
1-6600130-5	D C B A	PS	PS	J	J	J	J	PS	PS	PS	PS
				K	K	K	K				
				N	N	N	N				
		2P + 24S + 4P									

PART NUMBER	ROWS	POWER		SIGNAL				POWER			
		P1	P2	1	2	3	4	P5	P6	P5	P6
2-6600130-0	D C B A	PS	PS	J	J	J	J	PS	PS	PS	PS
				K	K	K	K				
				N	N	N	N				
		2P + 16S + 4P									

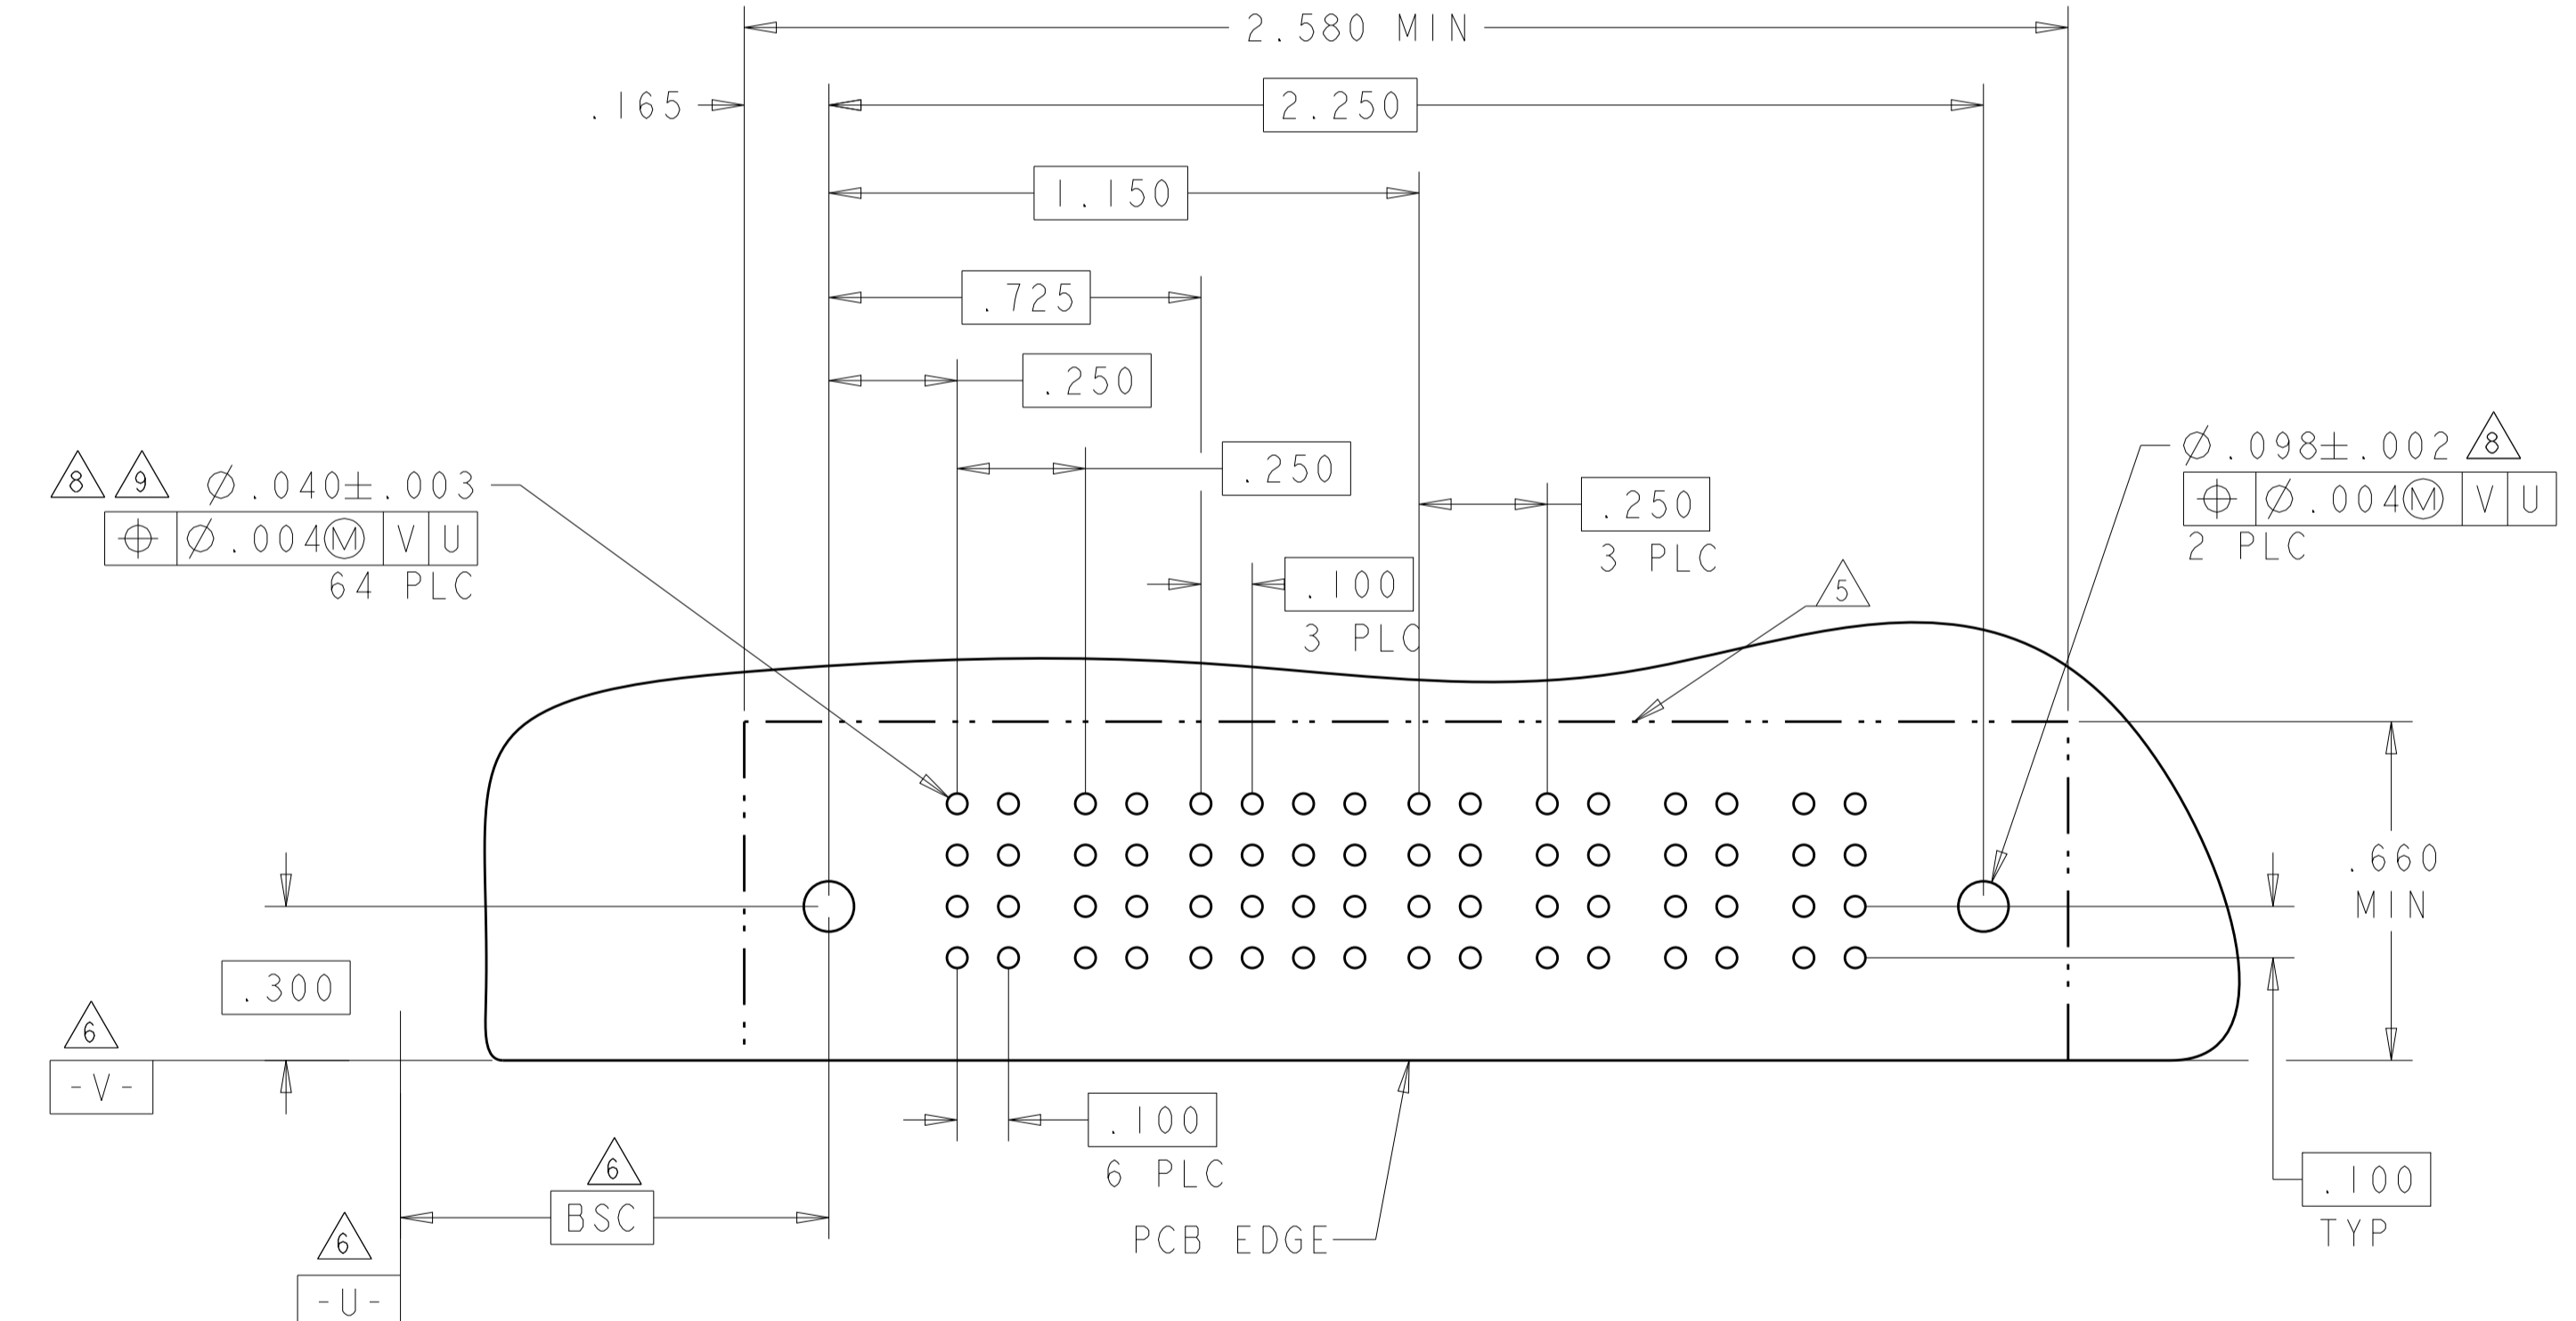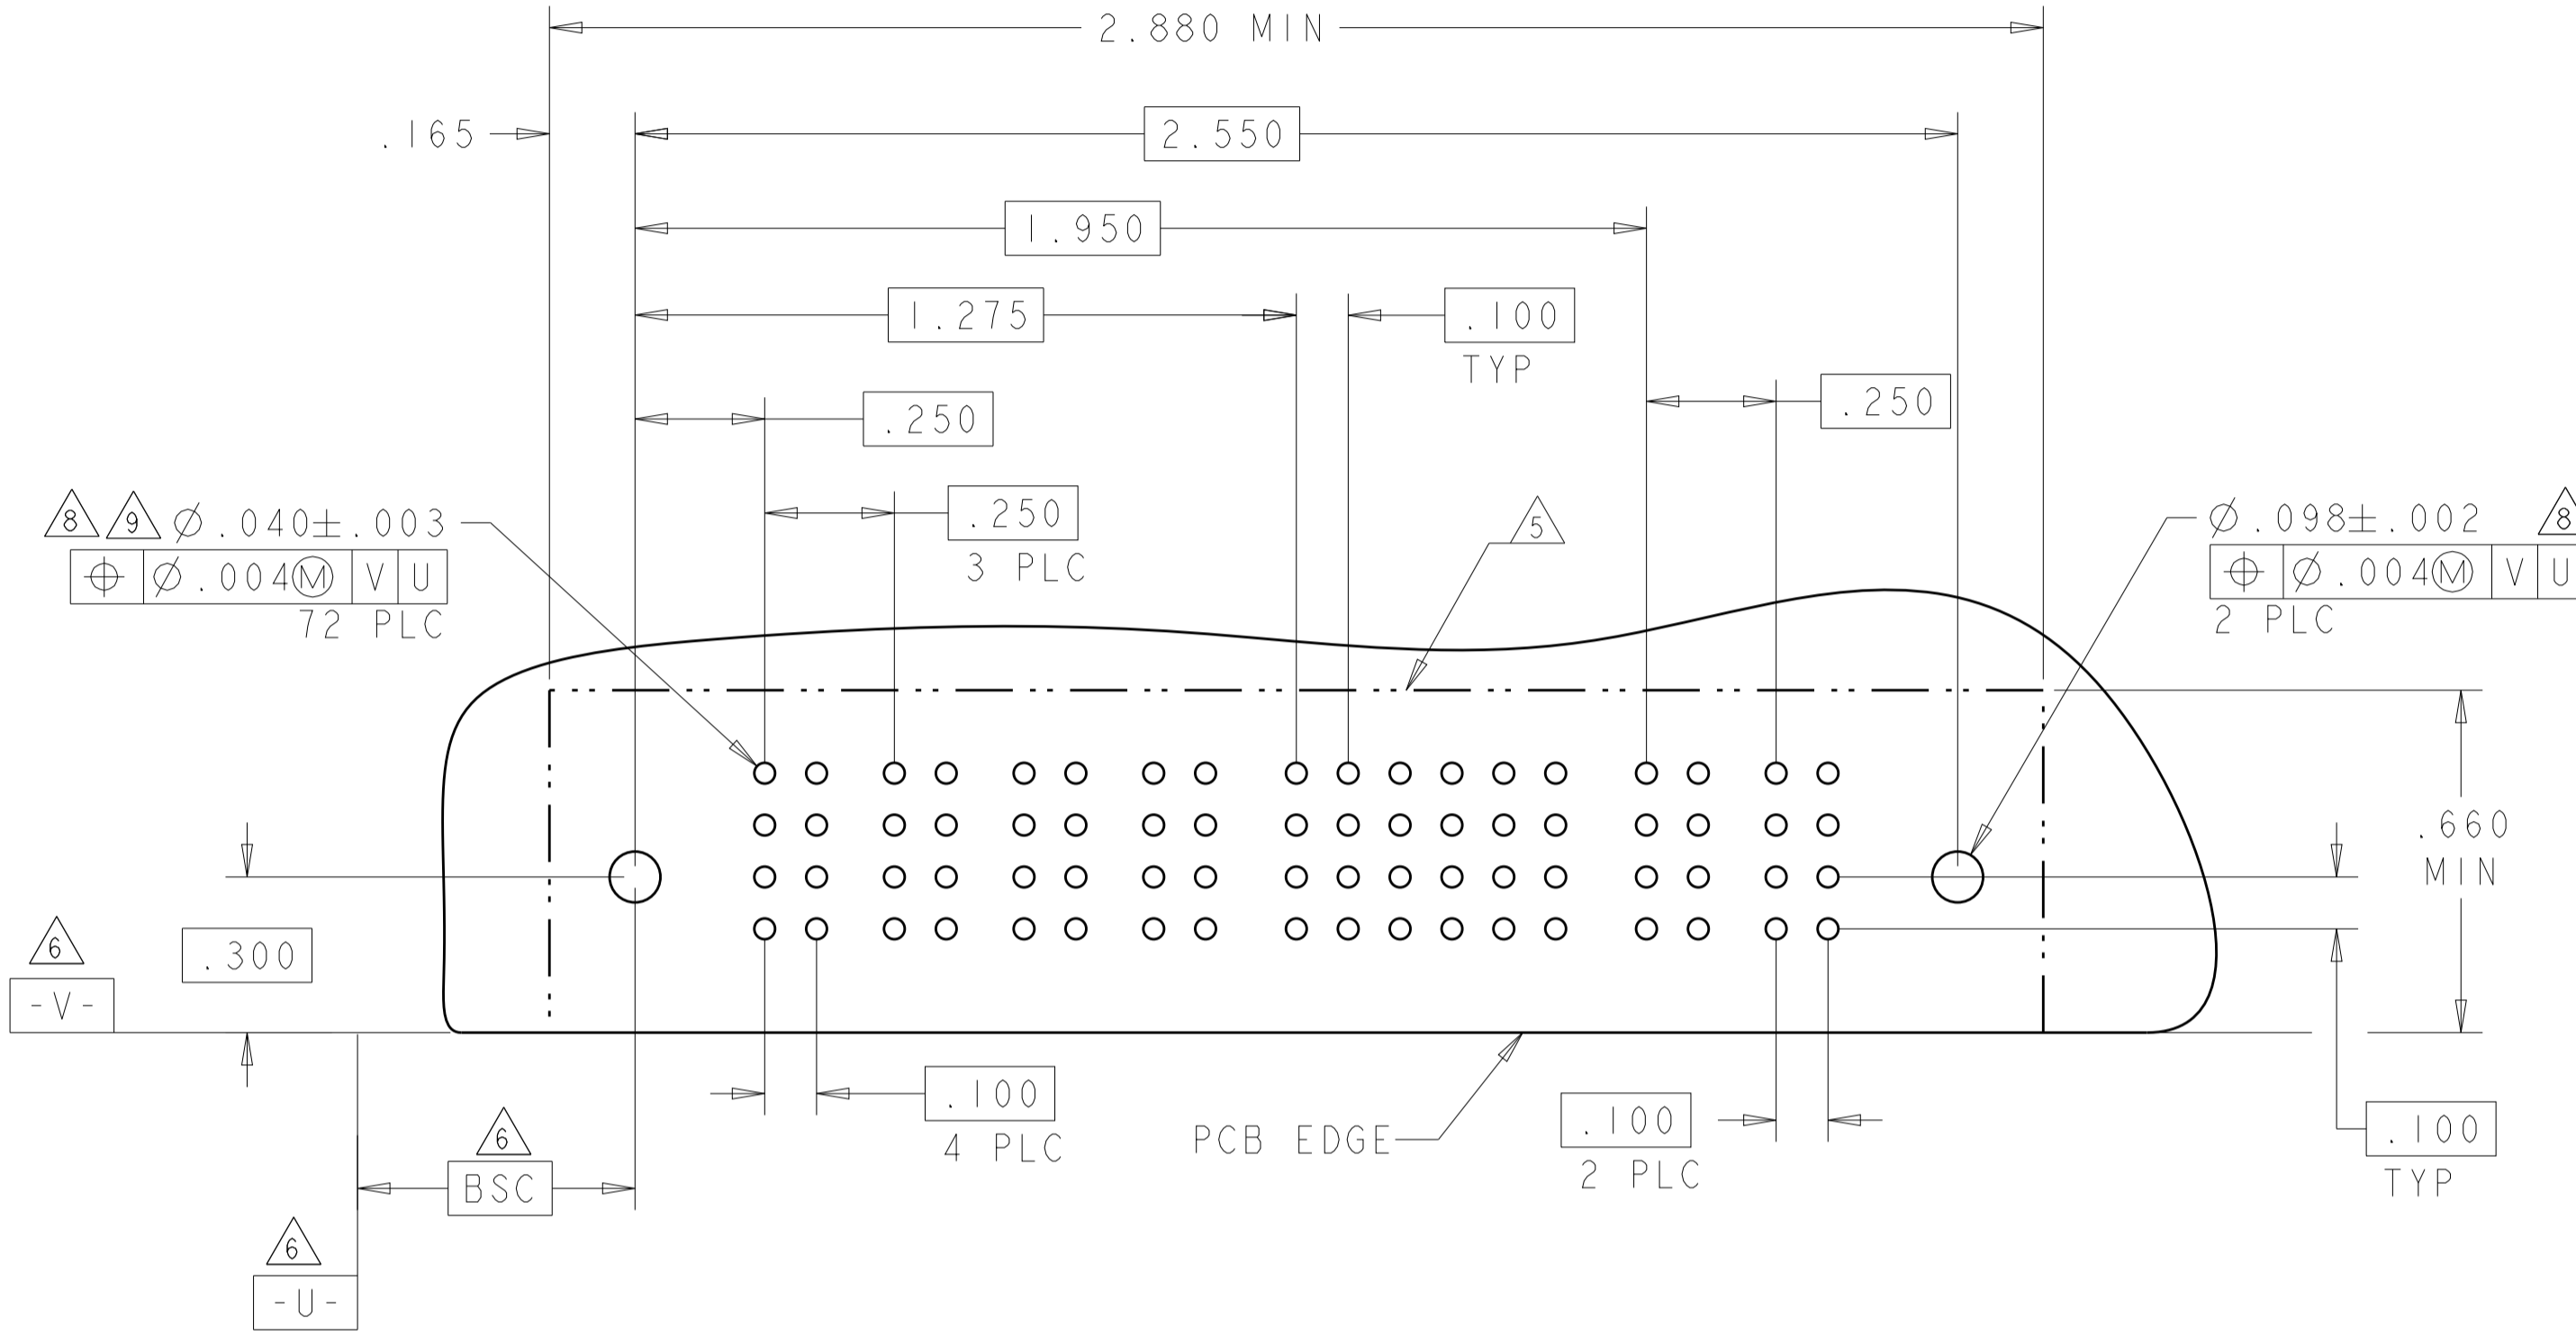


1-6600130-5 AND 2-66600130-0 PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. GRZYBOWSKI CHK: M. PERCHERKE APVD: M. PERCHERKE	DIMENSIONS: INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.020°	DIMAROS DIMAROS NAME: R. GRZYBOWSKI PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT: - CUSTOMER DRAWING	NAME: RIGHT ANGLE HEADER ASSEMBLY DUAL BEAM POWER CONTACT MULTI-BEAM XL SIZE: A1 CAGE CODE: - DRAWING NO: C=6600130 SCALE: 4:1 SHEET 7 OF 12 REV: F3	REVISIONS P. LTN. DESCRIPTION DATE DWN APVD - SEE SHEET 1 - - -
--	--	---	--	---	--	---



REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
-	-	SEE SHEET 1	-	-


PART NUMBER	ROWS	POWER									SIGNAL						POWER								
		P1	P2	P3	P4	P5	P6	P7	P8	P9	1	2	3	4	5	6	P10	P11	P12	P13	P14	P15	P16	P17	P18
I-6600130-6	D	PS	PS	PS	PS	PS	PS	PS	PS	PS	J	J	J	J	J	J	PS	PS	PS	PS	PS	PS	PS	PS	PS
	K										K	K	K	K	K										
	N										N	N	N	N	N										
A	HD	S	S	S	S	S	S	S	S	S	S	S	S	S	HD										
9P + 24S + 9P																									

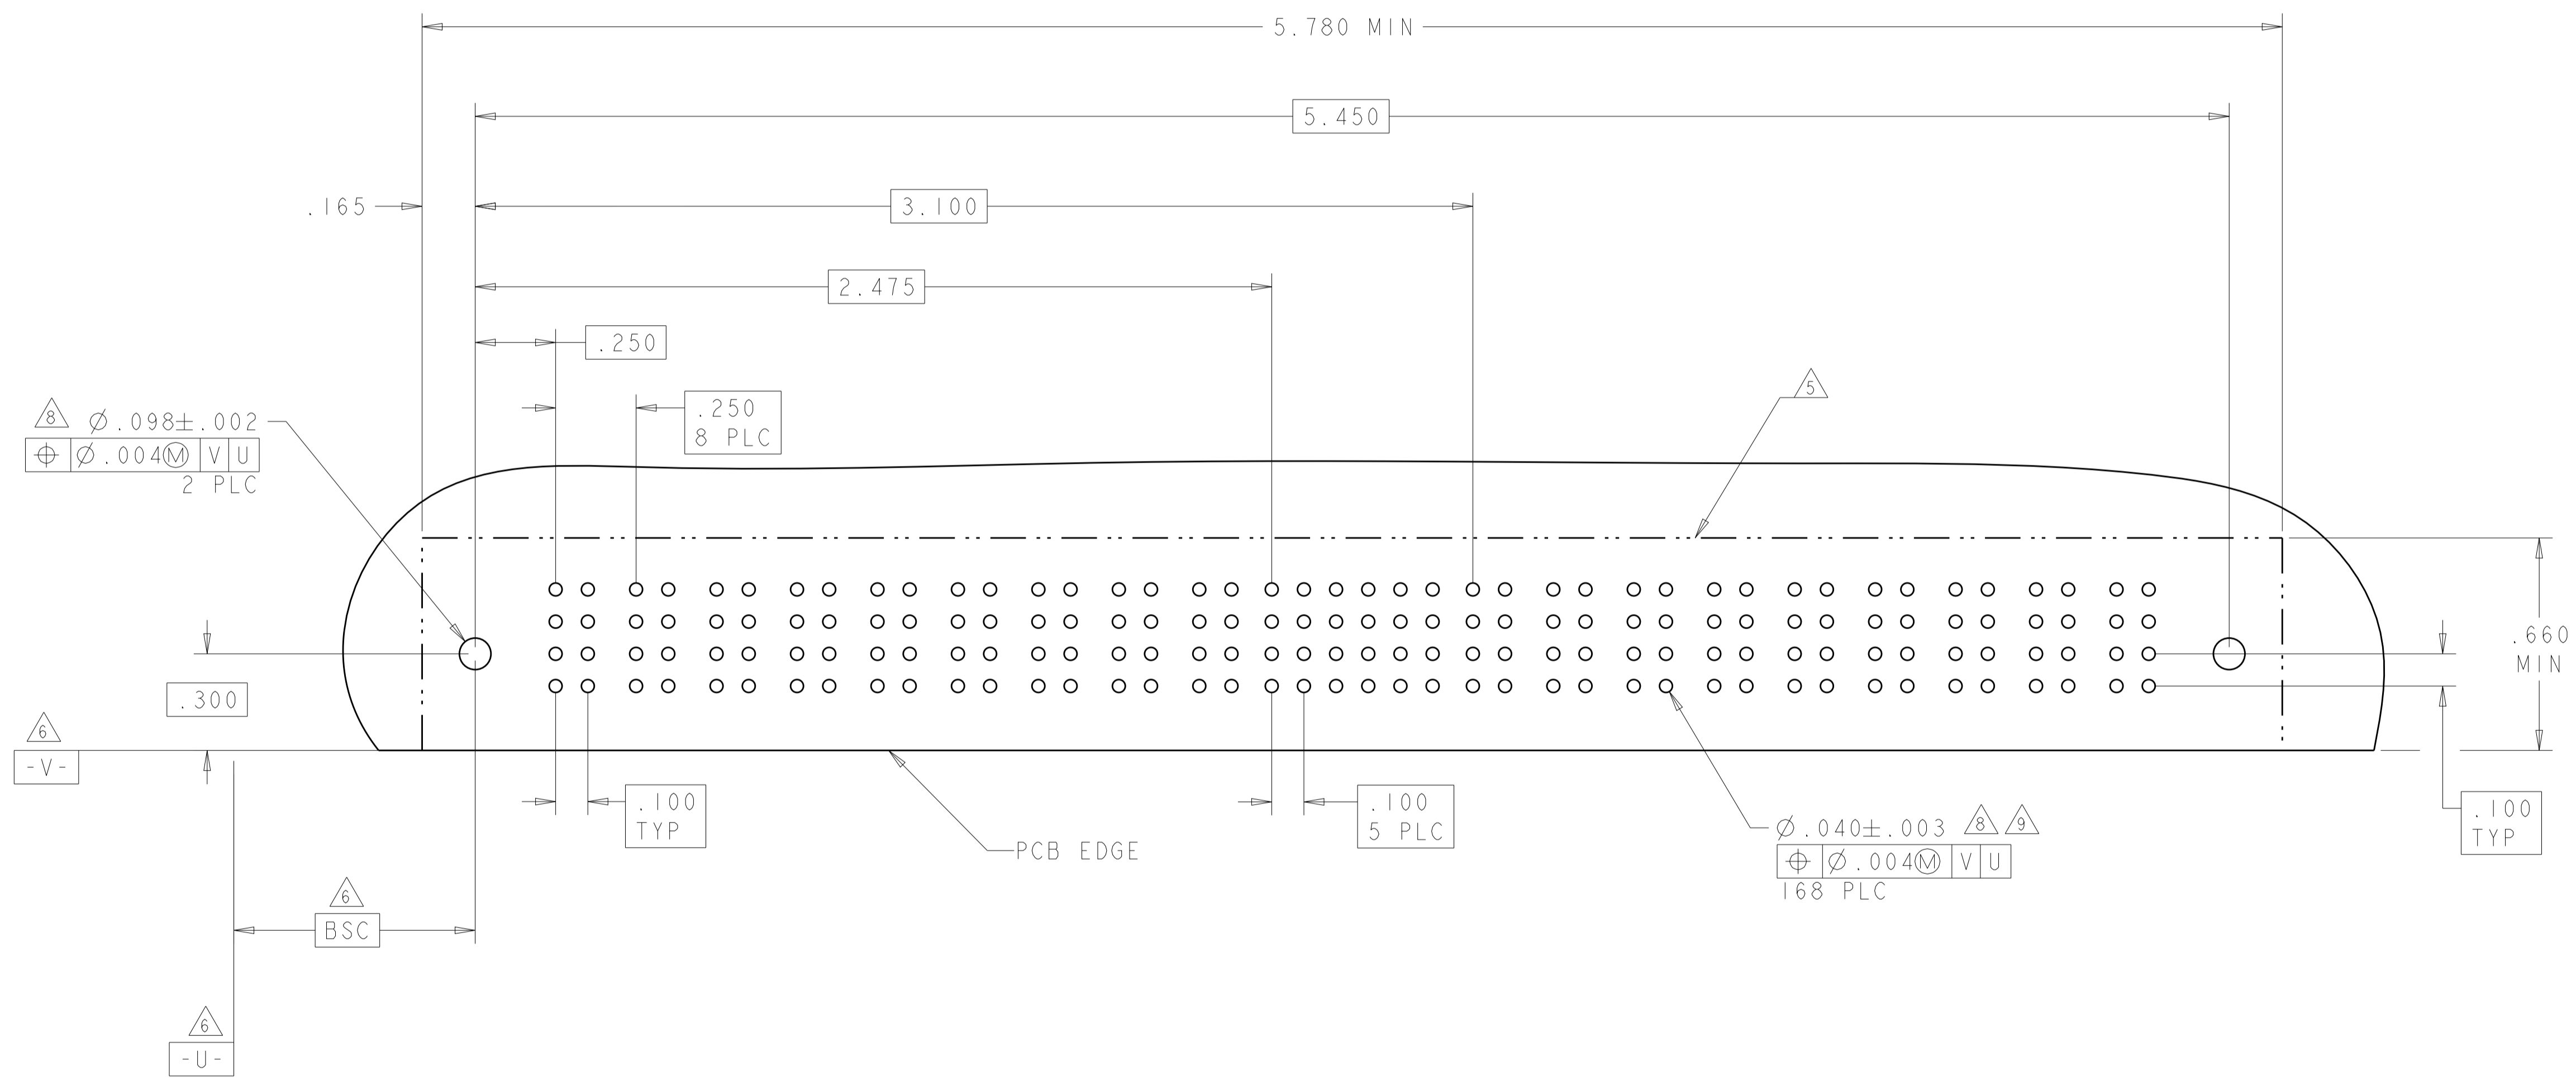


THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: R. GRZYBOWSKI	OTMAROS	TE Connectivity
CHK: M. PERCHERKE	OTMAROS	
APVD: M. PERCHERKE	OTMAROS	NAME: RIGHT ANGLE HEADER ASSEMBLY
DIMENSIONS: INCHES		PRODUCT SPEC: 108-1973
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC: 114-13038
0 PLC ±	1 PLC ±.01	SIZE: A1
2 PLC ±.01	3 PLC ±.005	CAGE CODE: C=6600130
4 PLC ±.0020	ANGLES ±.2°	RESTRICTED TO: -
MATERIAL: -	FINISH: -	WEIGHT: -
CUSTOMER DRAWING		SCALE: 4:1
		SHEET: 8 OF 12
		REV: F3

REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APPD.
-	-	SEE SHEET 1	-	-

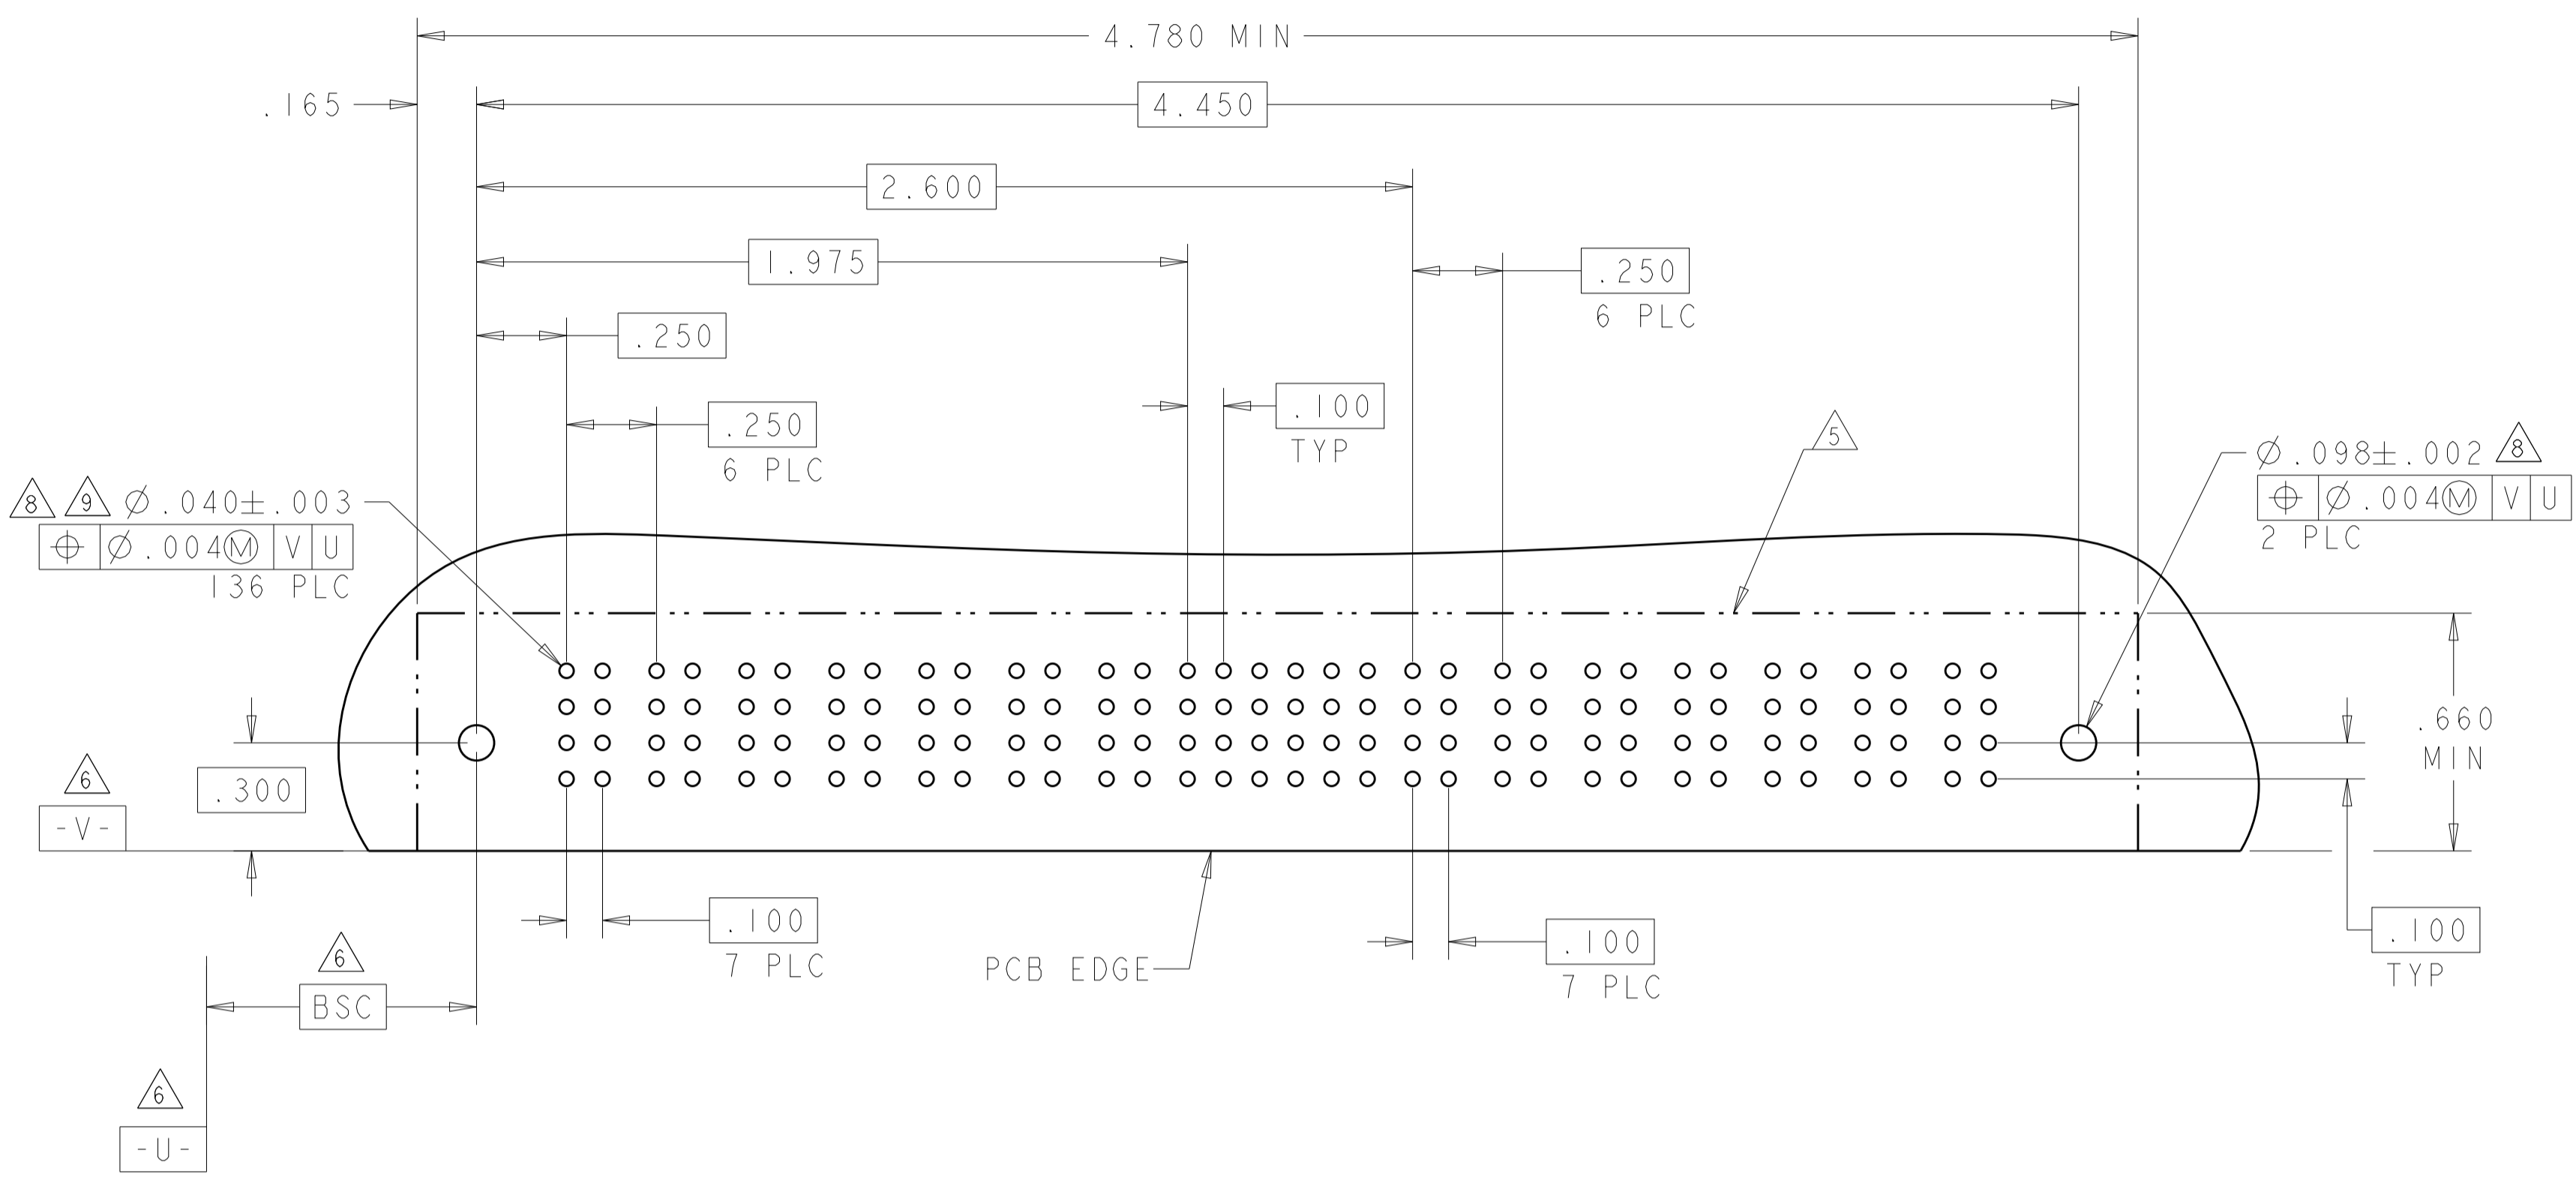

PART NUMBER	ROWS	POWER							SIGNAL						POWER						
		P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6	P8	P9	P10	P11	P12	P13	P14
1-6600130-7	D C B A	PS	PS	PS	PS	PS	PS	PS	J	J	J	J	J	J	PS	PS	PS	PS	PS	PS	PS
									K	K	K	K	K	K							
									N	N	N	N	N	N							
7P + 24S + 7P								S	S	S	S	S	S								

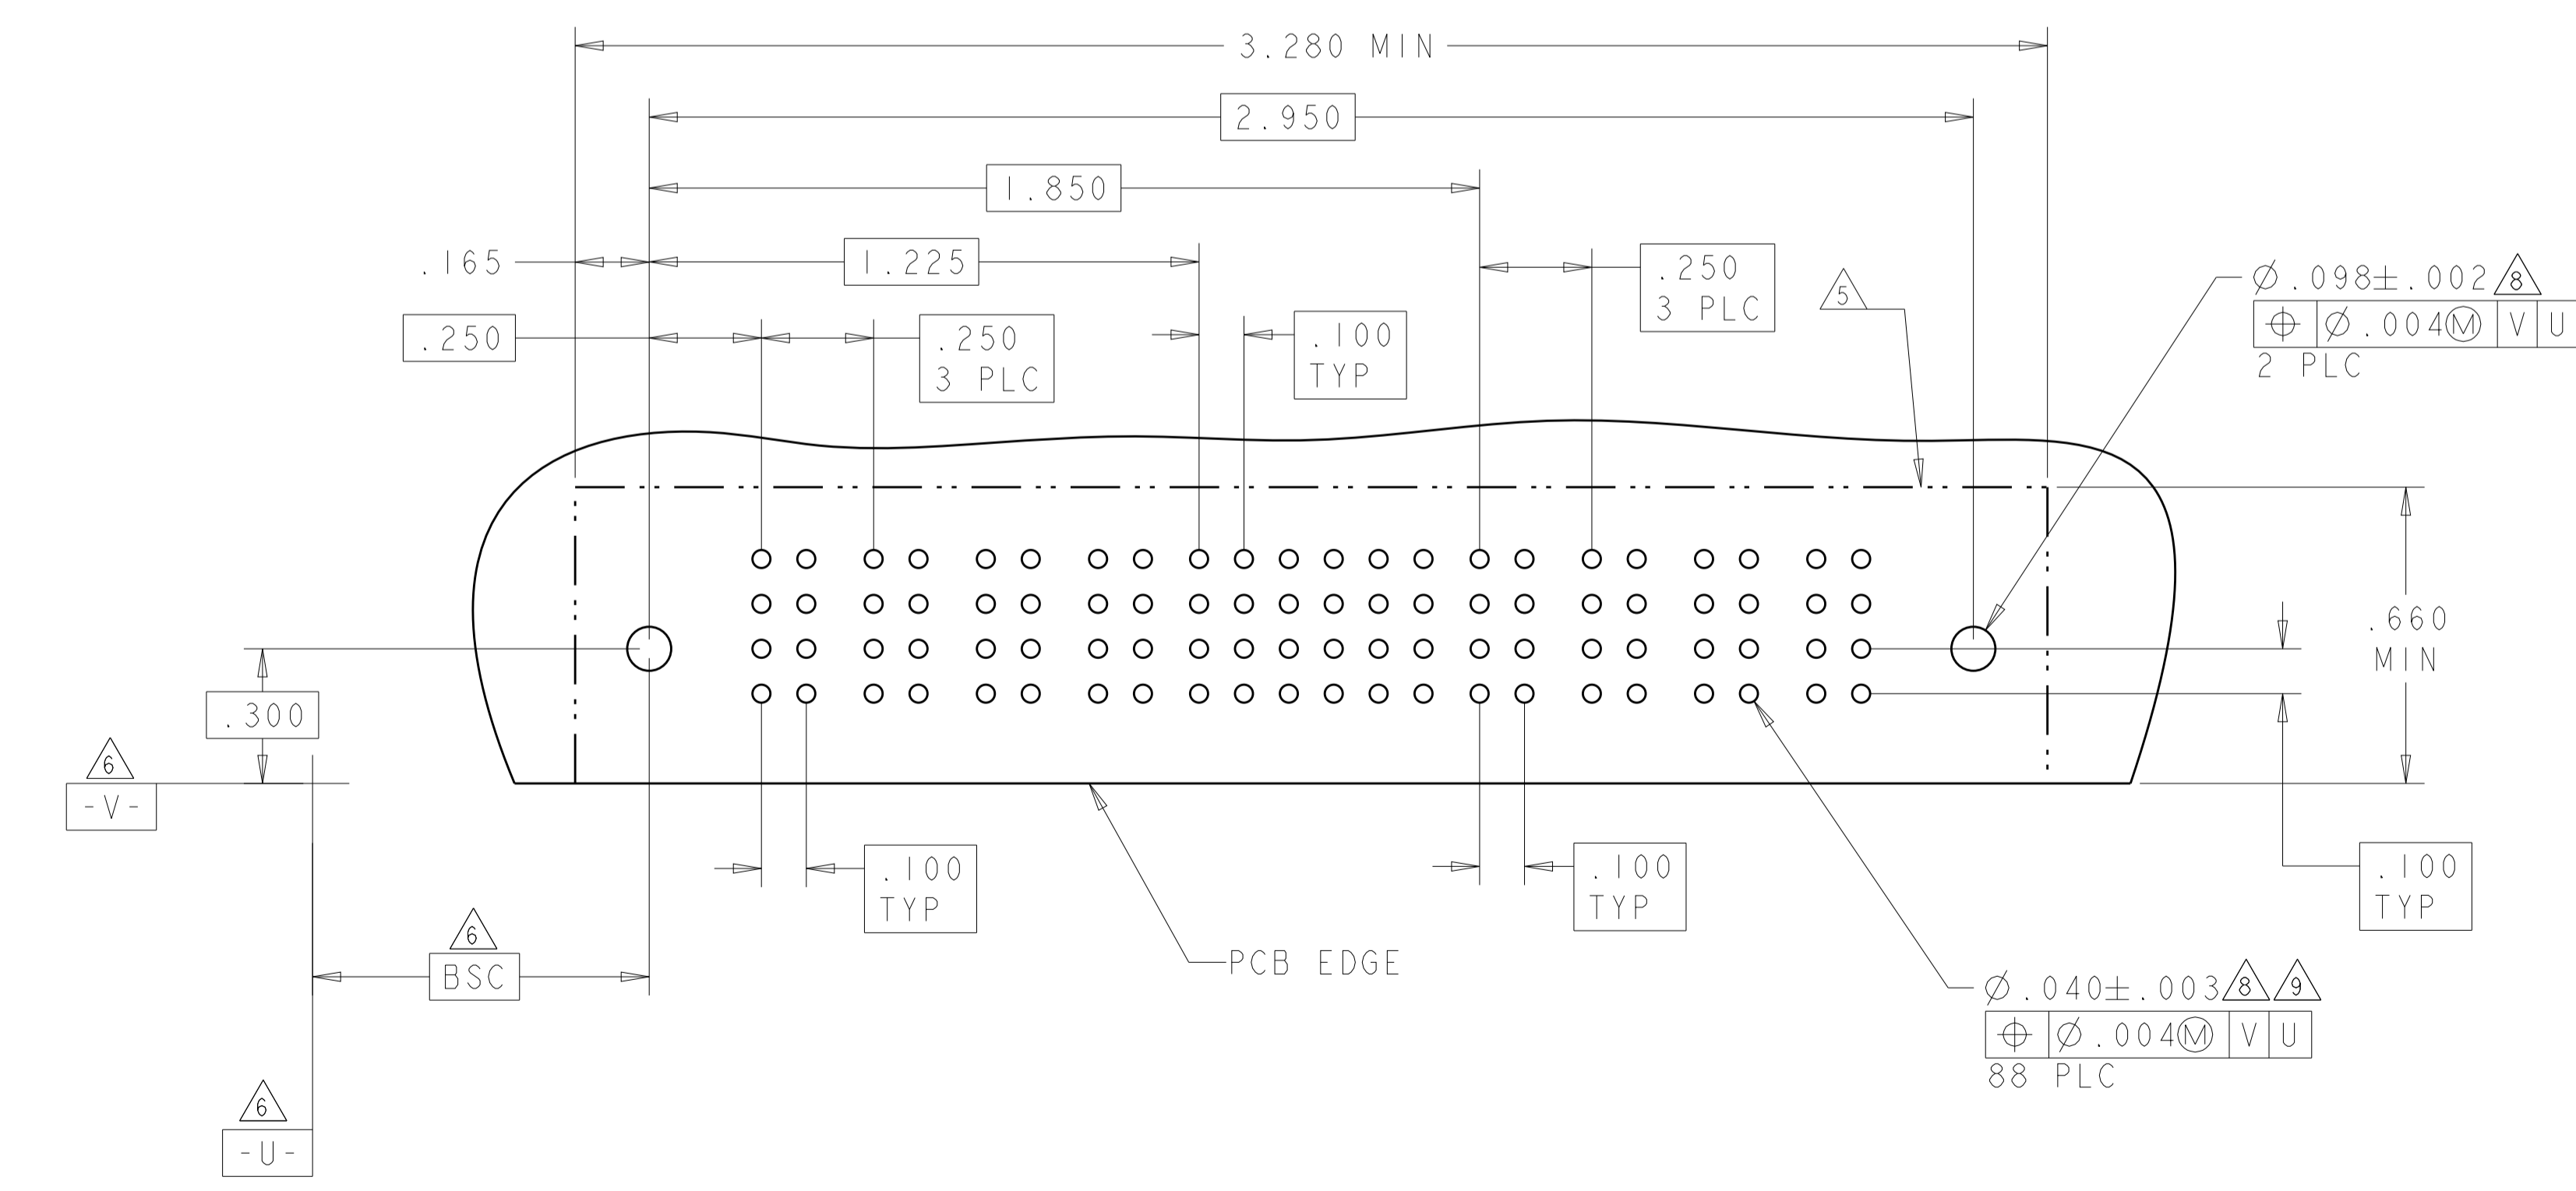



PART NUMBER	ROWS	POWER				SIGNAL						POWER			
		P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8
1-6600130-8	D C B A	PS	PS	PS	PS	J	J	J	J	J	J	PS	PS	PS	PS
						K	K	K	K	K	K				
						N	N	N	N	N	N				
4P + 24S + 4P						S	S	S	S	S	S				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. GRZYBOWSKI CHK: M. PERCHERKE APVD: M. PERCHERKE	DIMENSIONS: INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2° FINISH:	DTIMAROS OTIMAROS NAME: M. PERCHERKE PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT:	<b>STE</b> TE Connectivity RIGHT ANGLE HEADER ASSEMBLY DUAL BEAM POWER CONTACT MULTI-BEAM XL	SIZE: A1 CAGE CODE: 6600130 SCALE: 4:1 SHEET: 9 OF 12 REV: F3
--	--	---	---	--	---	---

REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APP'D.
-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS	POWER				SIGNAL			POWER	
		P1	P2	P3	P4	1	2	3	P5	P6
1-6600130-9	D C B A	PS	PS	PS	PS	E	E	E	PS	PS
						F	F	F		
						N	N	N		
						H	H	H		
4ACP + 12S + 2P										

PART NUMBER	ROWS	POWER				SIGNAL			POWER			
		P1	P2	P3	P4	1	2	3	P5	P6	P7	P8
2-6600130-1	D C B A	PS	PS	PS	PS	J	J	J	PS	PS	PS	PS
						K	F	K				
						N	N	N				
						S	S	S				
4P + 12S + 4P												

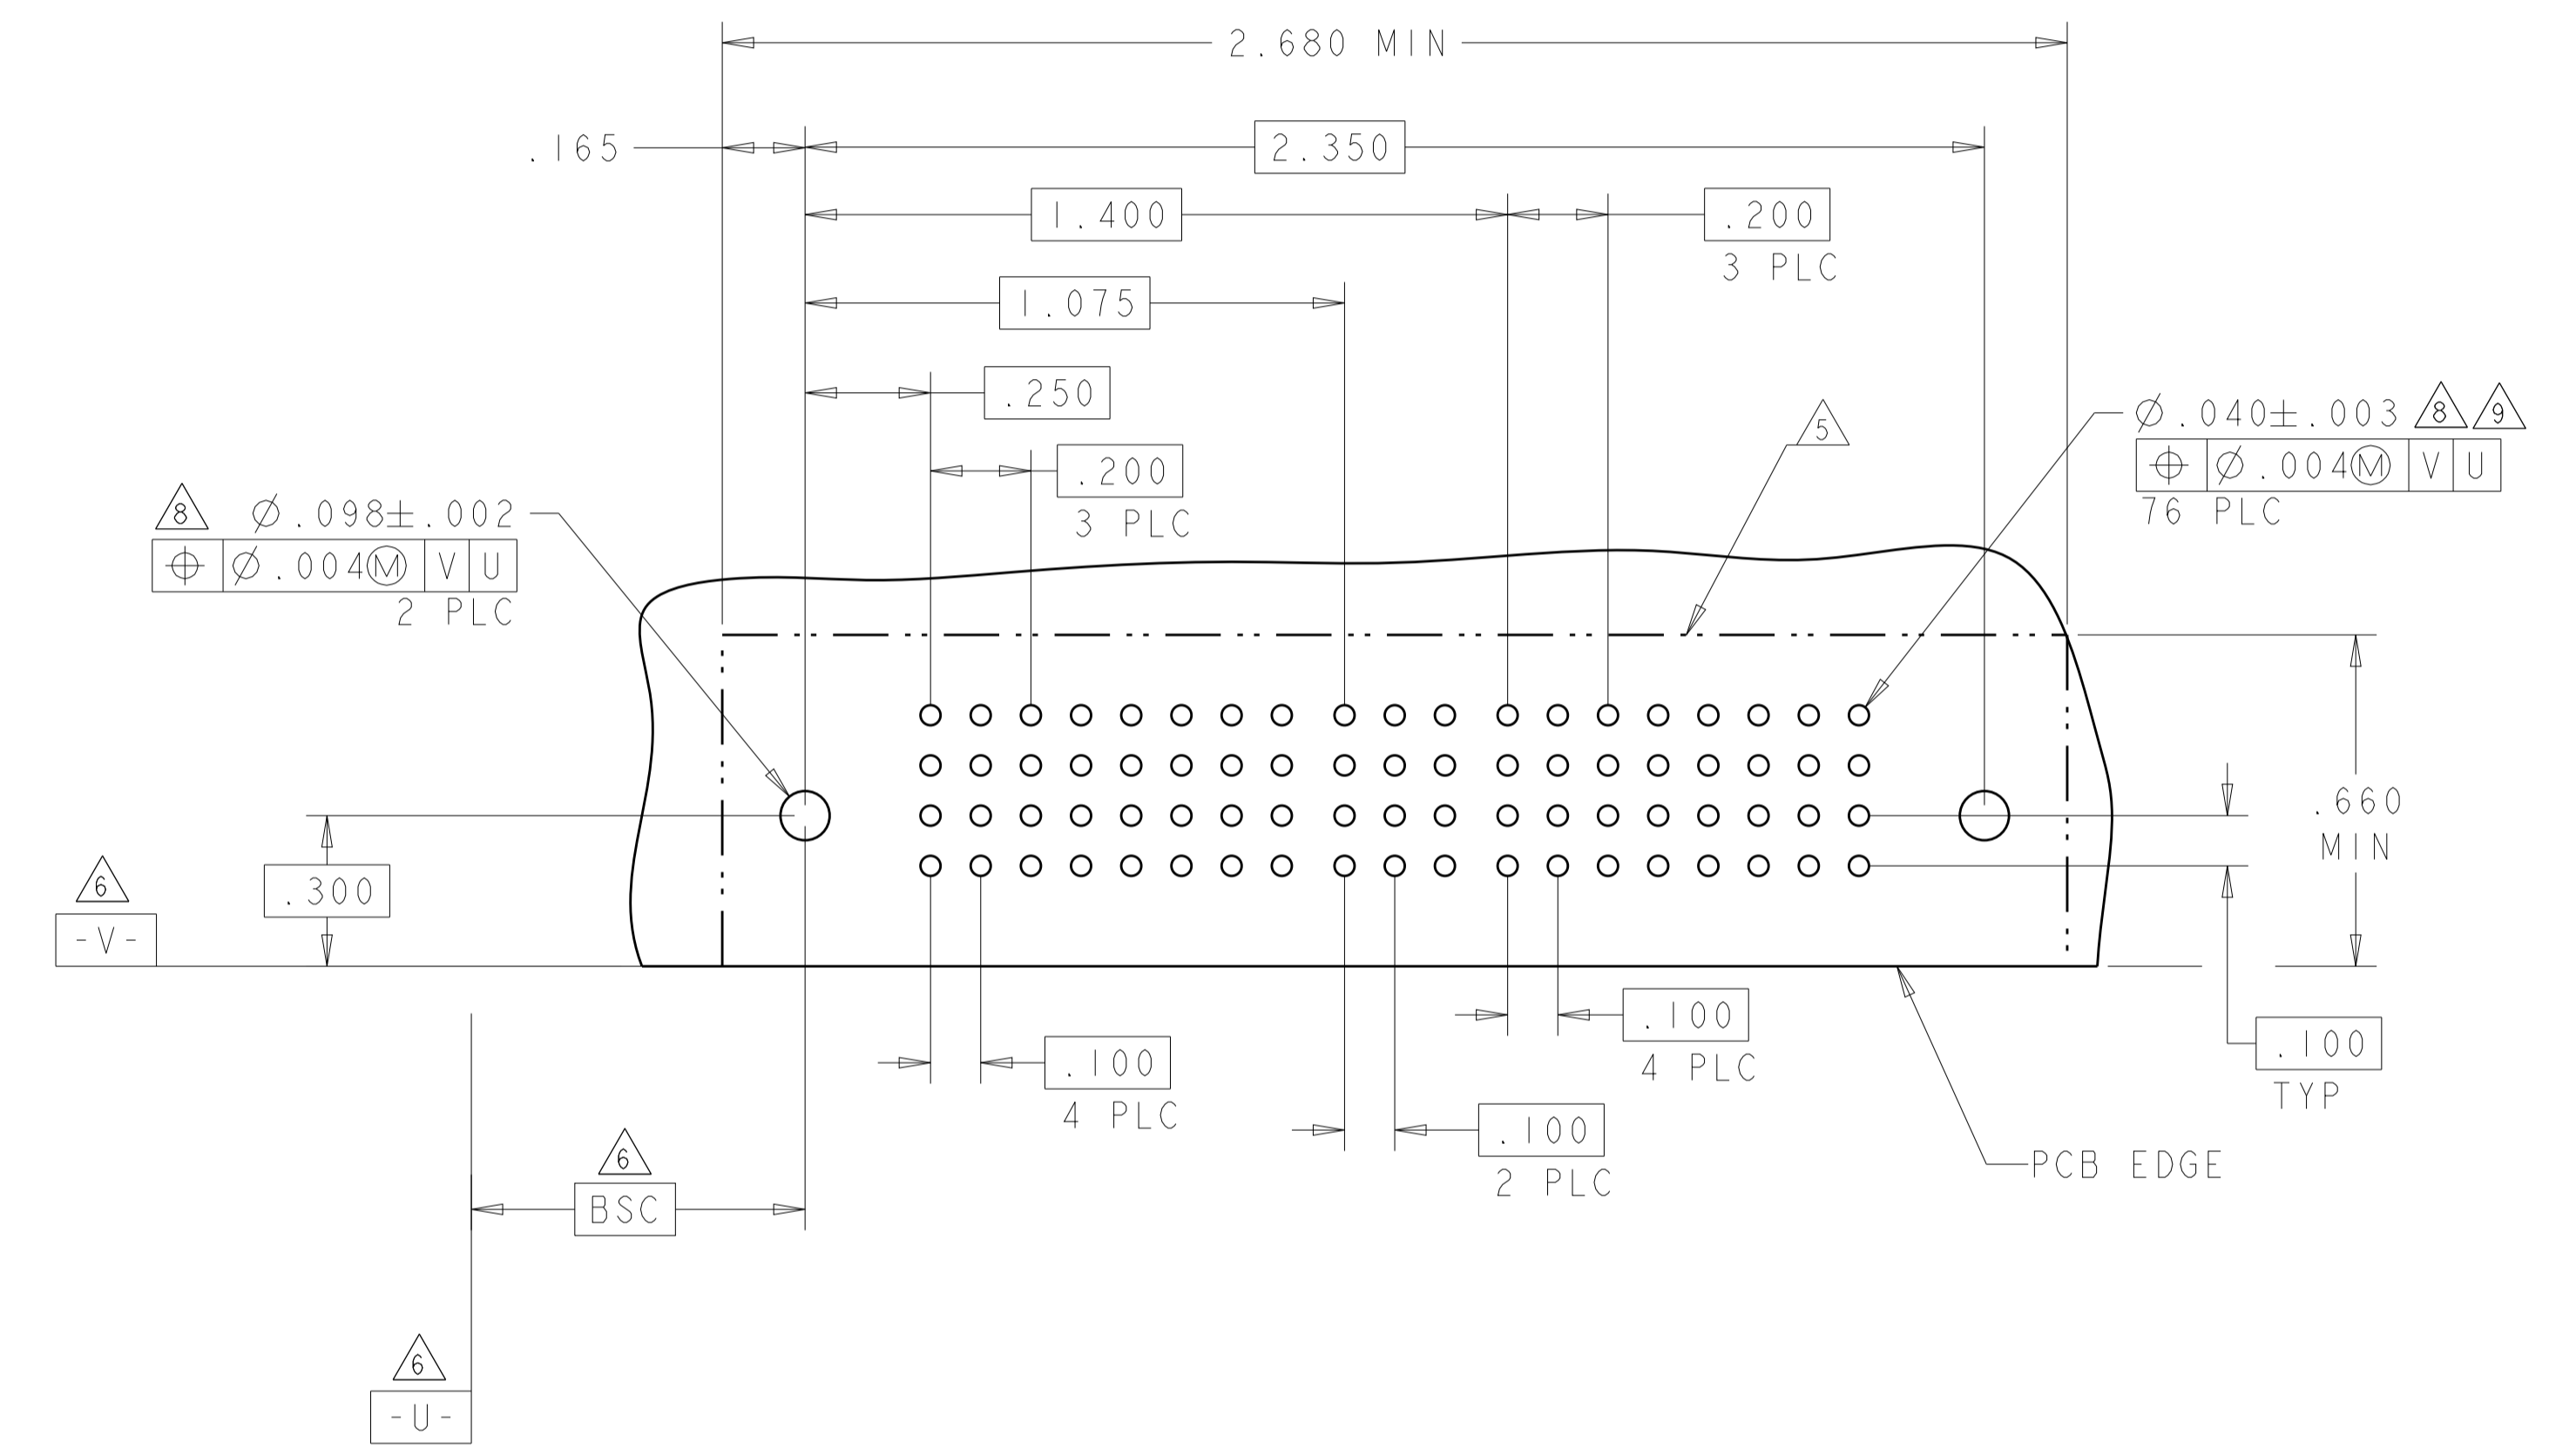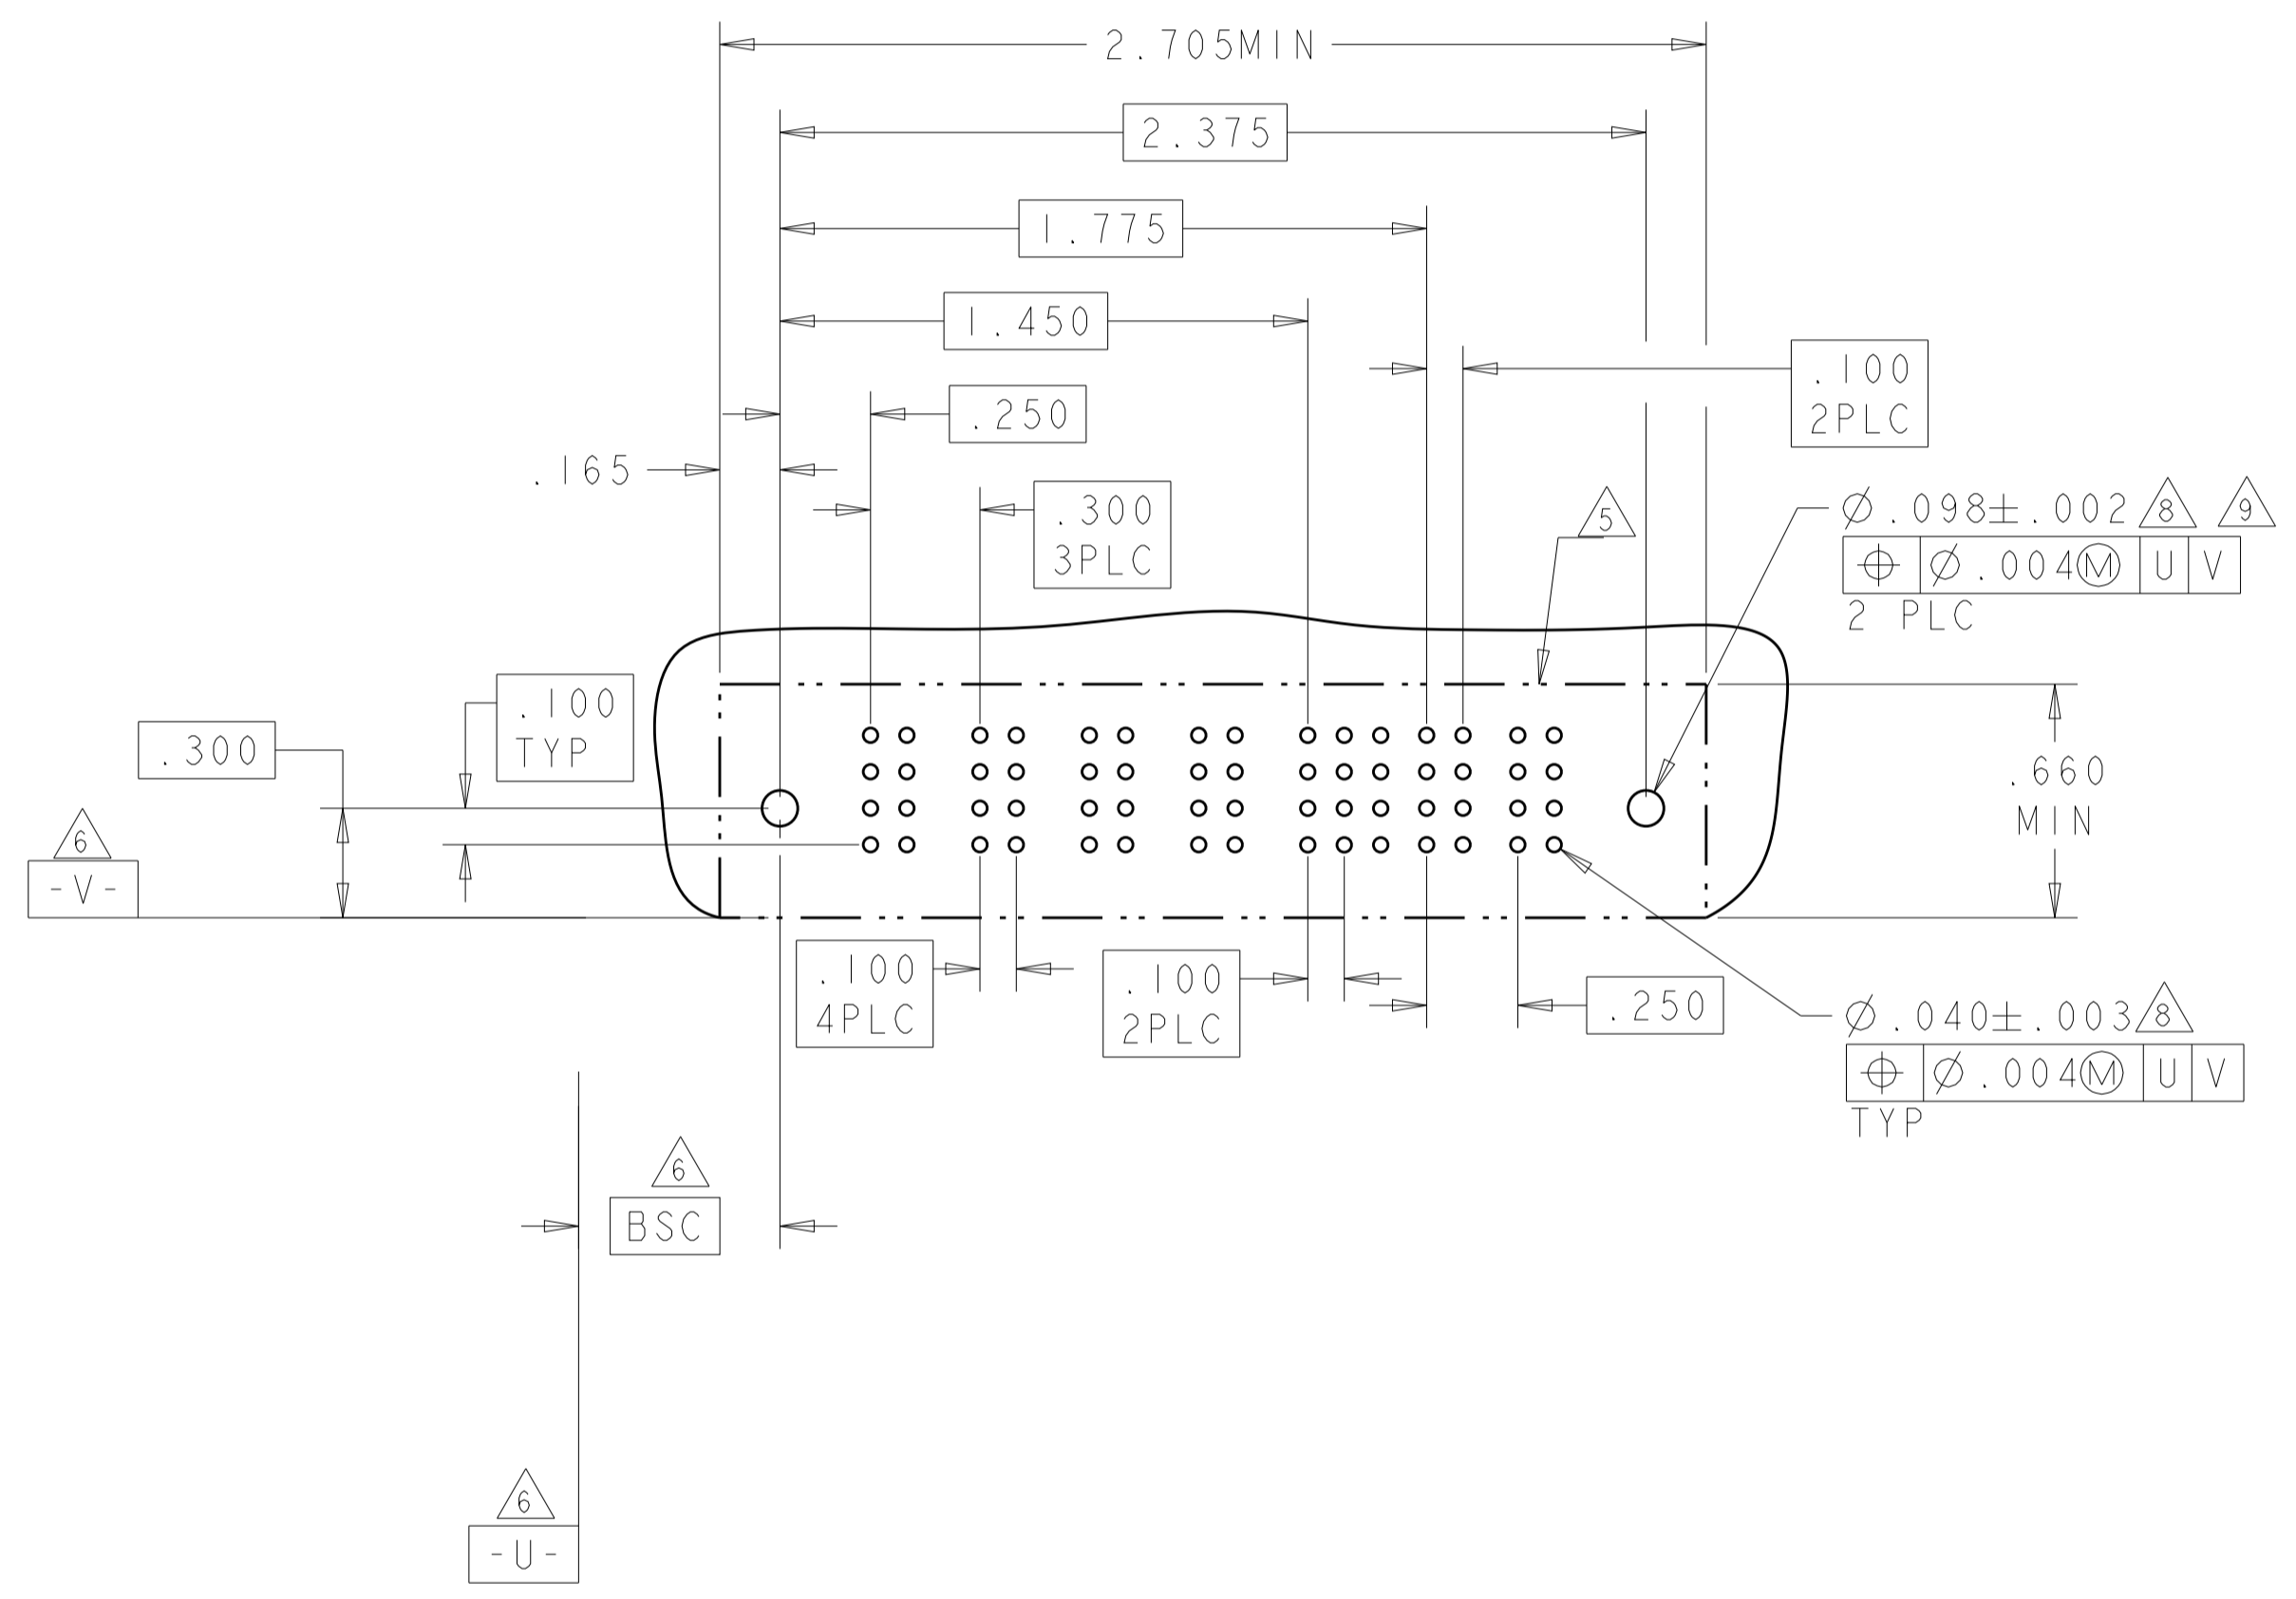



THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: R. GRZYBOWSKI	OTIMAROS	<b>STE</b> TE Connectivity
CHK: M. PERCHERKE	OTIMAROS	
APVD: M. PERCHERKE	NAME:	RIGHT ANGLE HEADER ASSEMBLY
PRODUCT SPEC:	108-1973	DUAL BEAM POWER CONTACT
APPLICATION SPEC:	114-13038	MULTI-BEAM XL
MATERIAL:	WEIGHT:	SIZE: A1
FINISH:	CUSTOMER DRAWING	SCALE: 4:1
		SHEET 10 OF 12
		REV: F3

REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS	POWER		SIGNAL						POWER			
		P1	P2	1	2	3	4	5	6	P3	P4	P5	P6
2-6600130-2	D	PS	PS	J	J	J	J	J	J	PS	PS	PS	PS
	C			K	K	K	K	K	K				
	B			N	N	N	N	N	N				
	A			S	S	S	S	S	S				
2P + 24S + 4P													

PART NUMBER	ROWS	POWER		SIGNAL		POWER	
		P1	P2	1	2	P3	P4
2-6600130-4	D	PS	PS	J	J	PS	PS
	C			K	K		
	B			N	N		
	A			S	S		
2ACP + 8S + 2ACP							

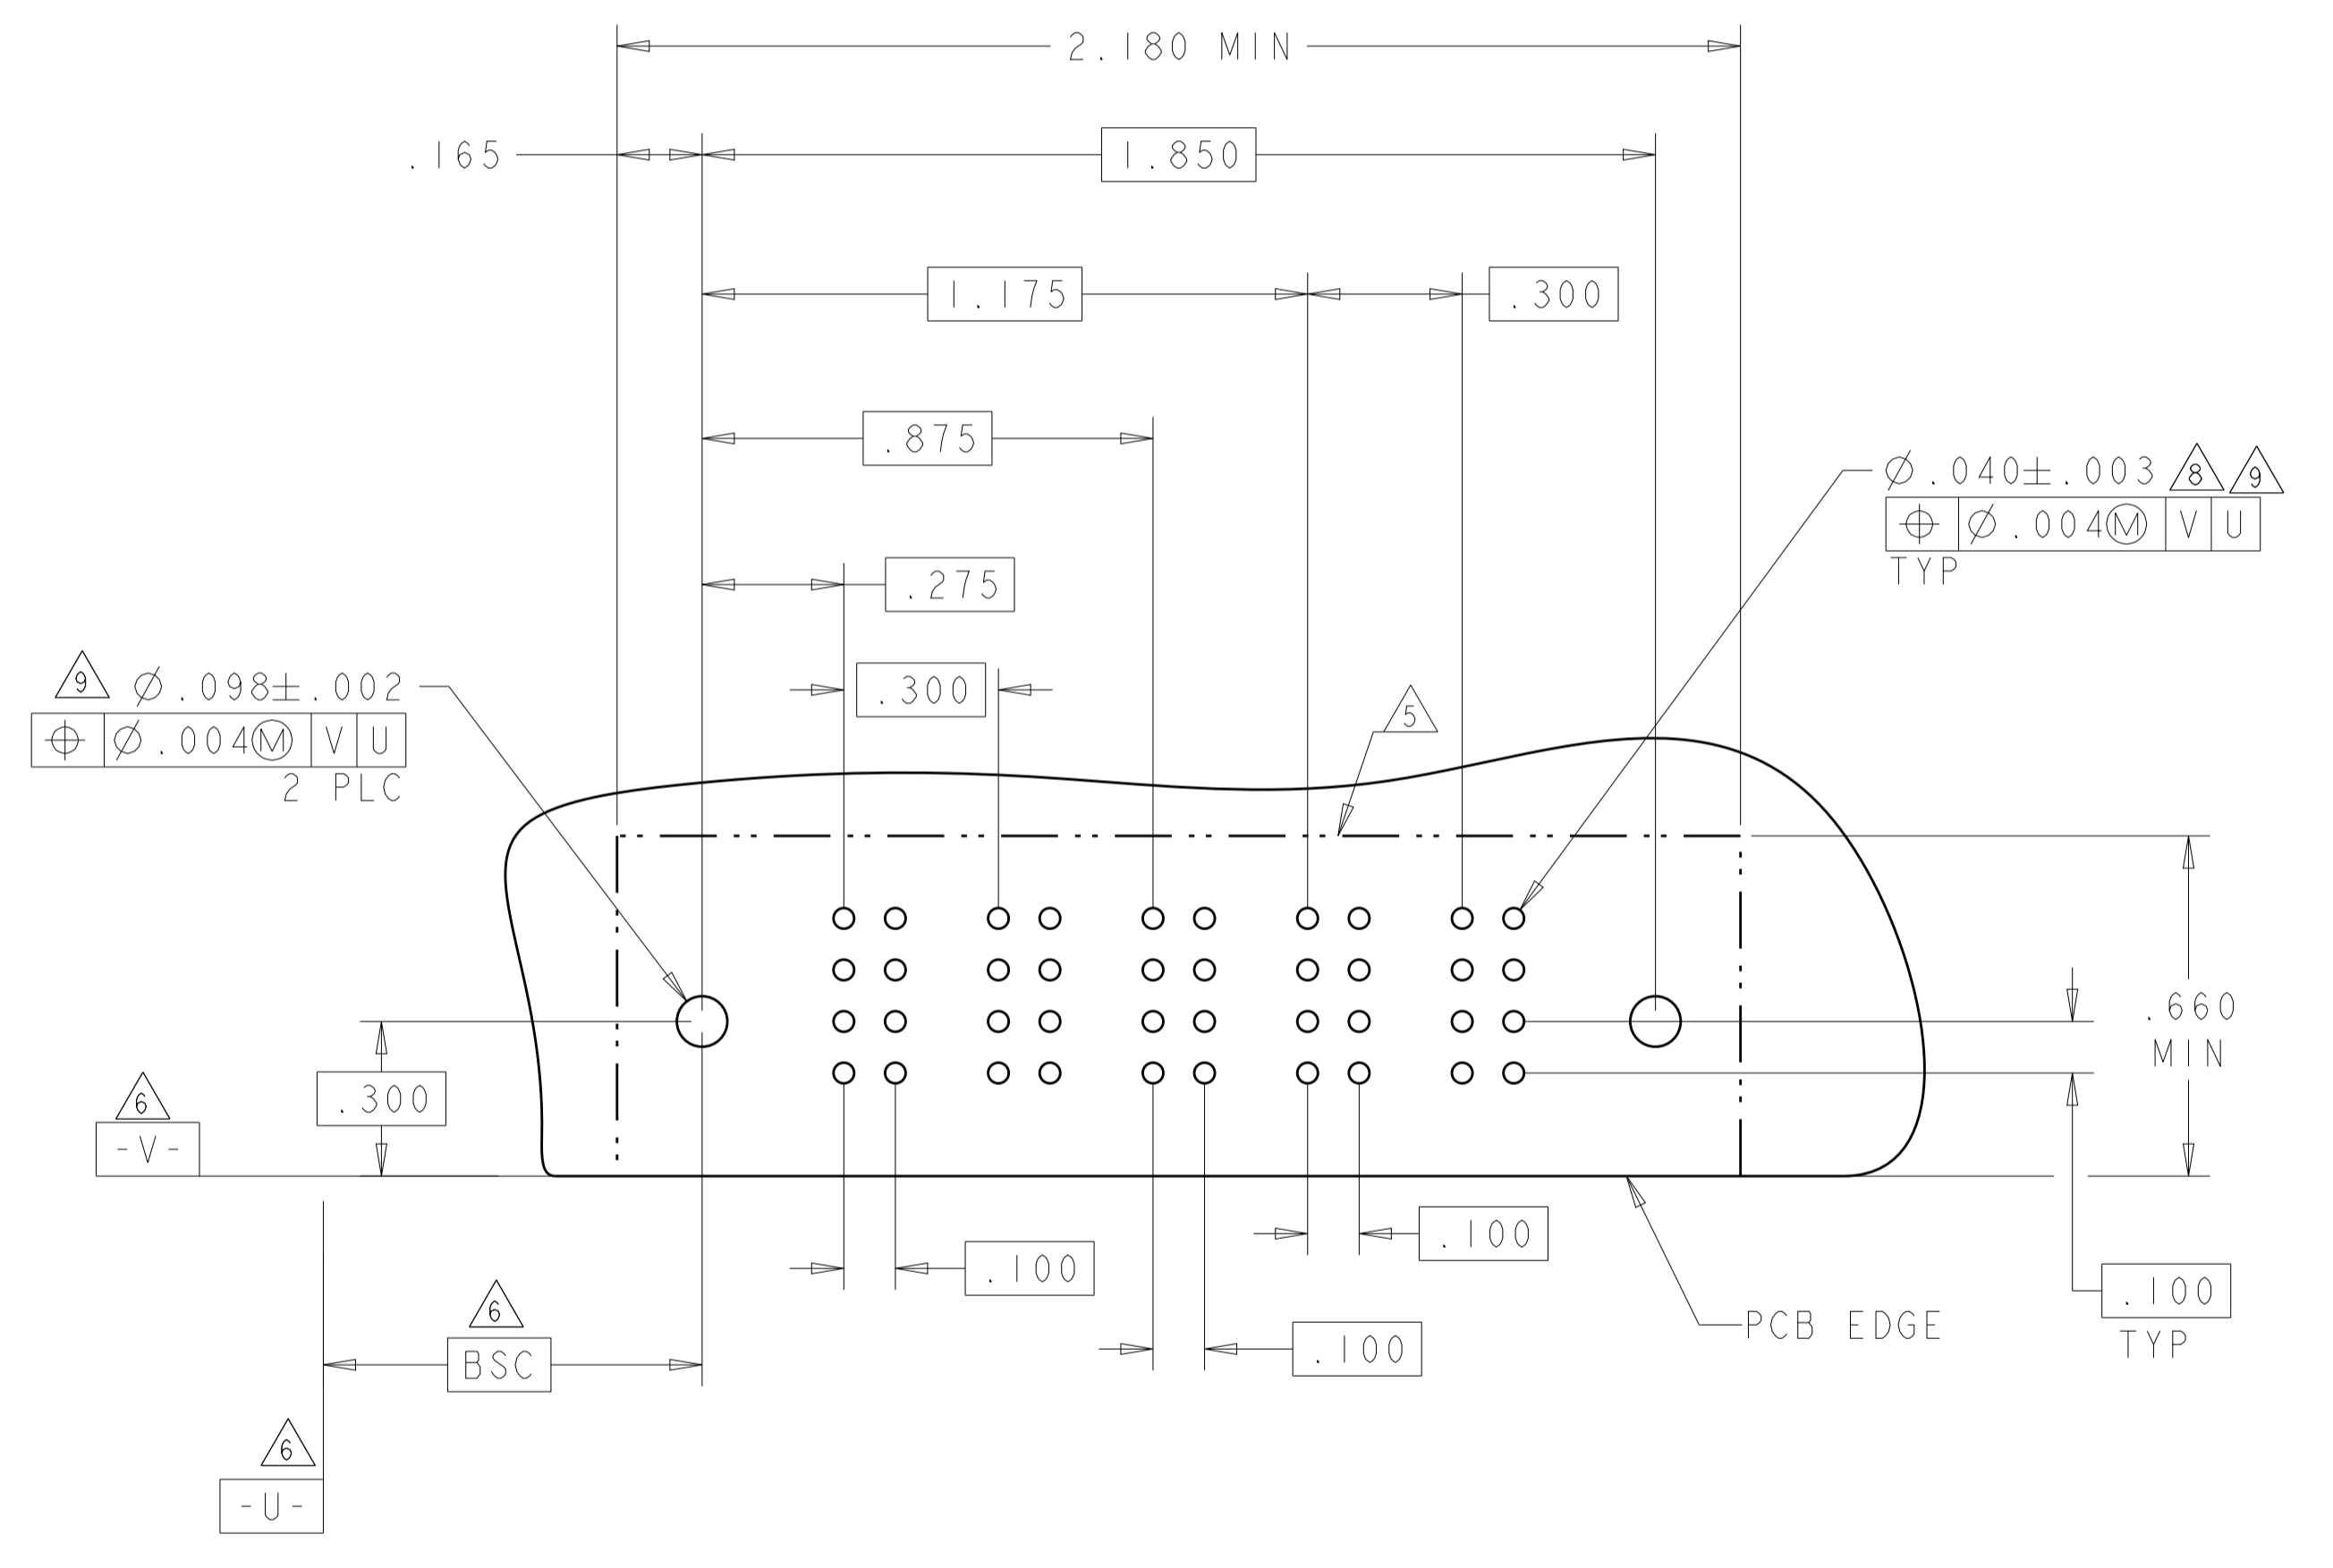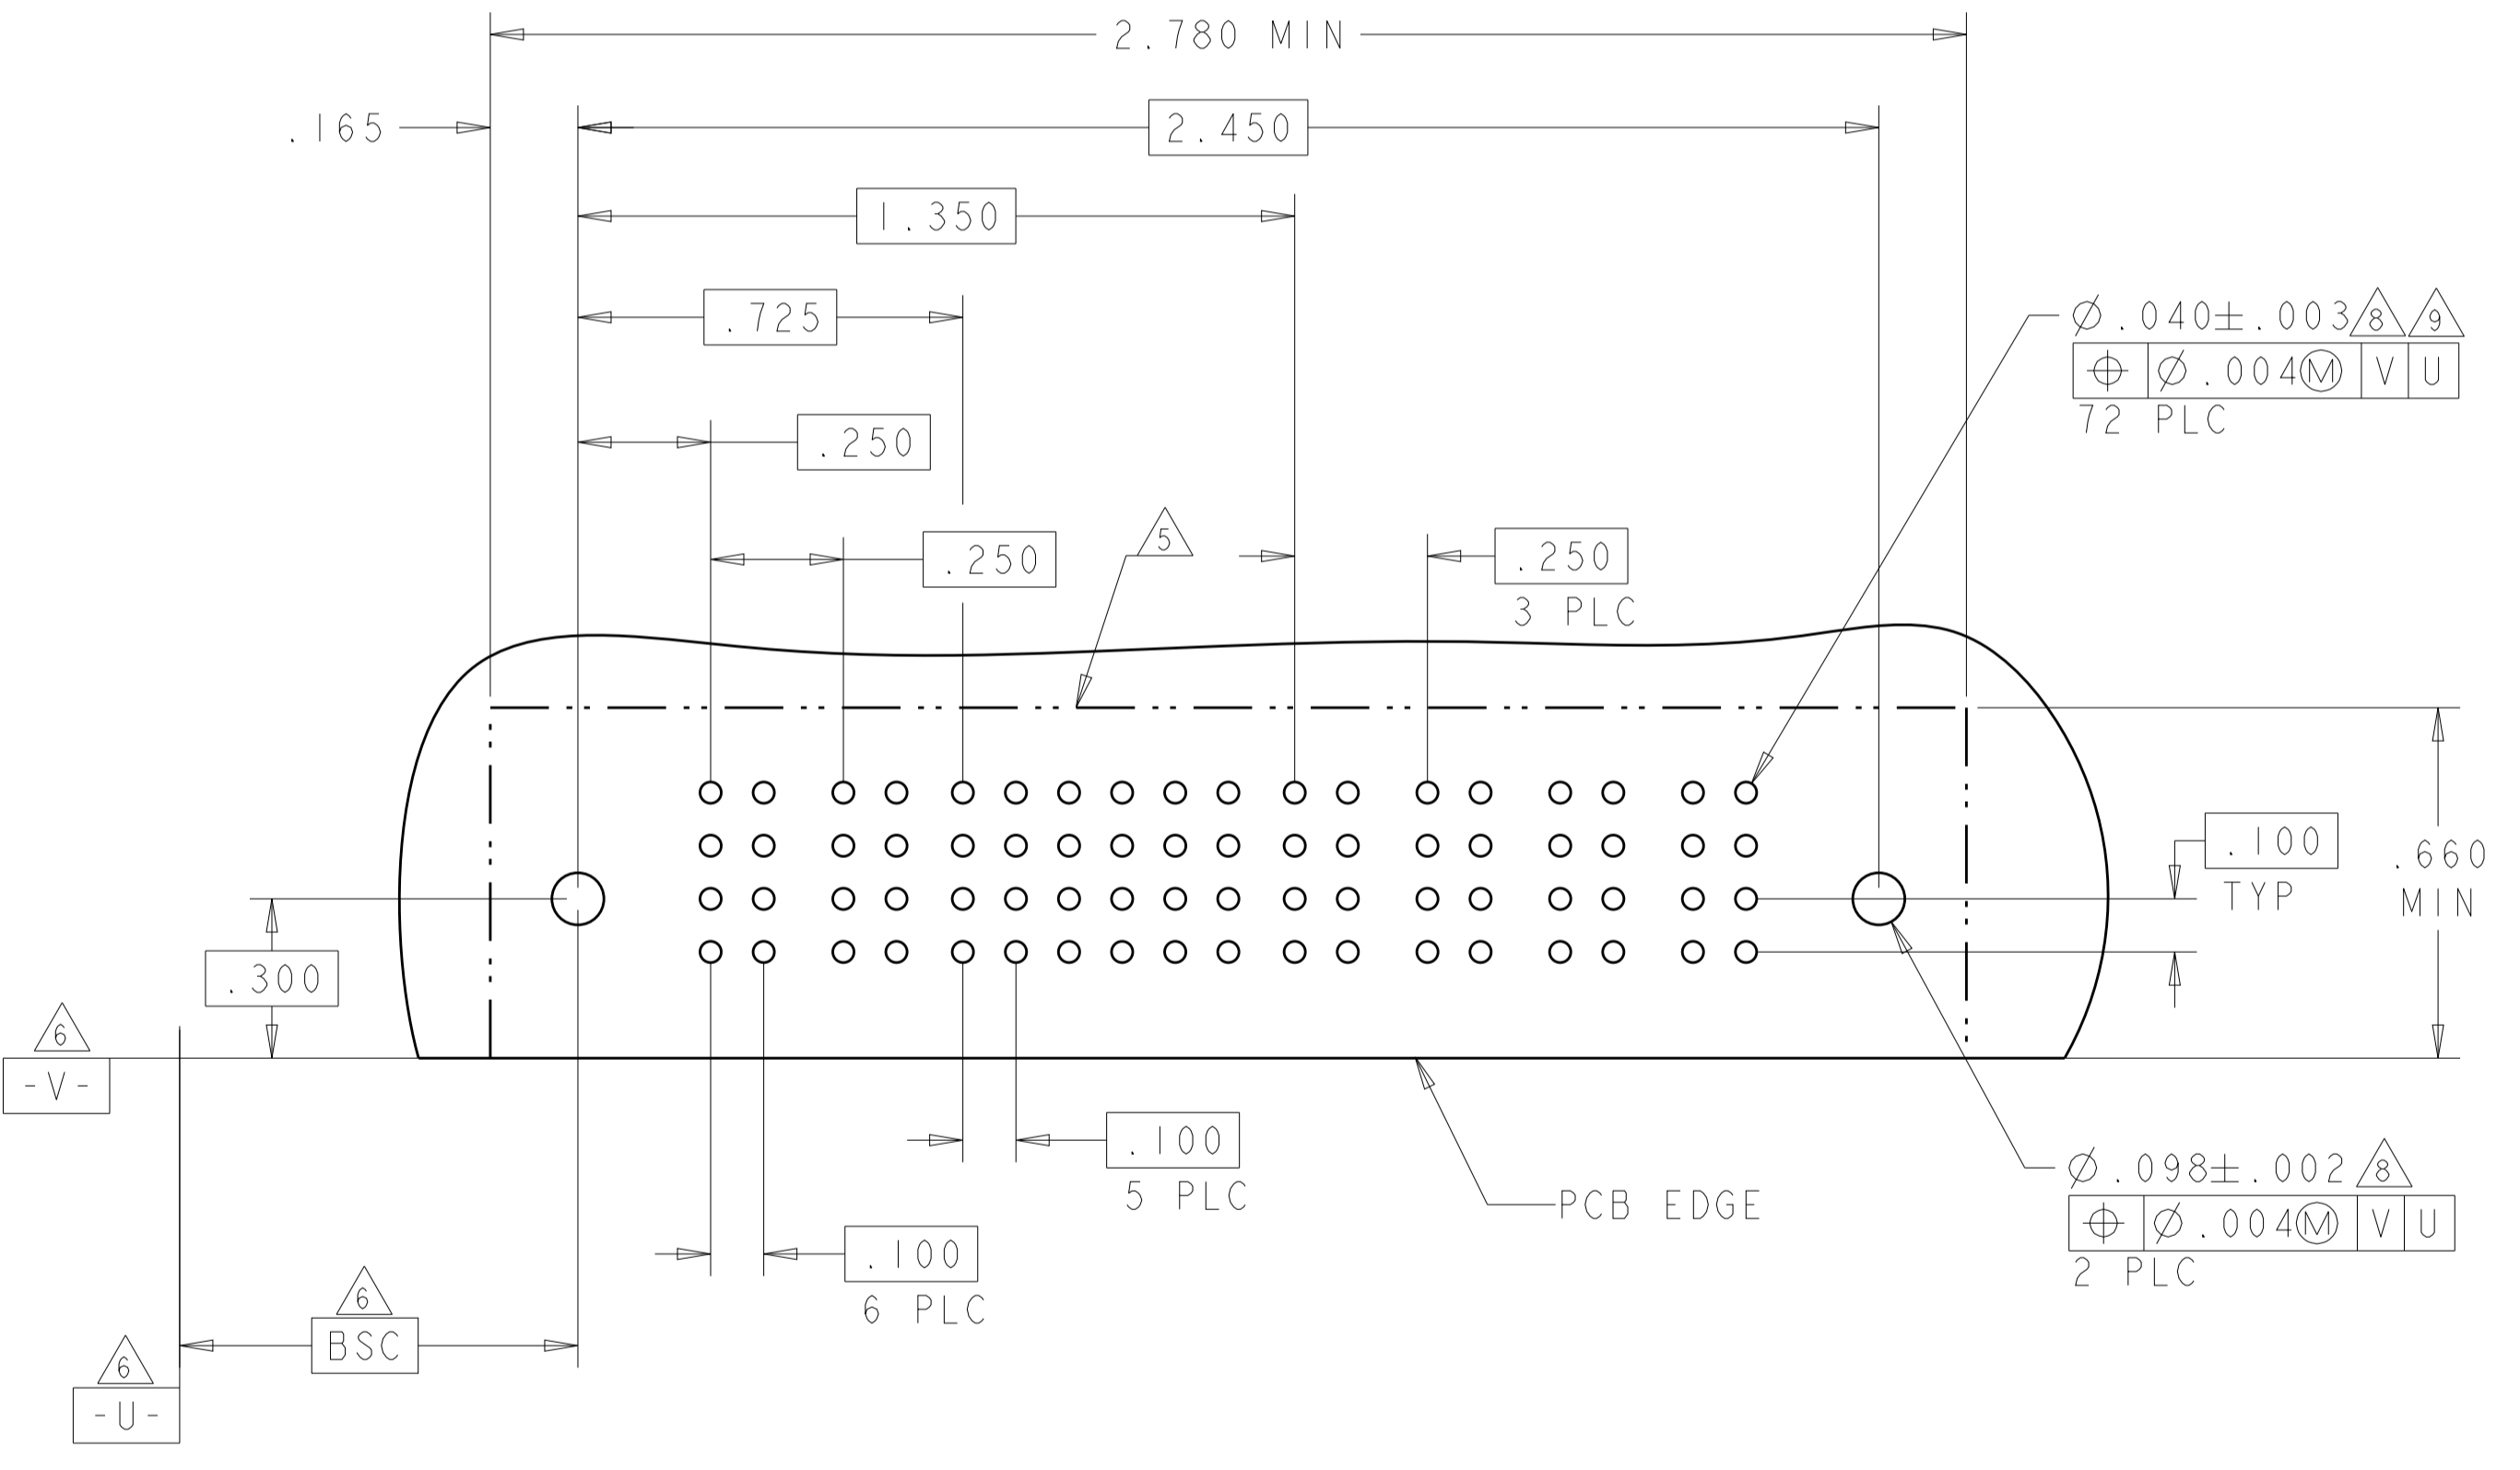

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.005 3 PLC ±.0020 4 PLC ±. ANGLES ±°	OWN: B. GRZYBOWSKI CHK: M. PERCHERKE APVD: M. PERCHERKE	OTIMAROS OTIMAROS	TE Connectivity RIGHT ANGLE HEADER ASSEMBLY DUAL BEAM POWER CONTACT MULTI-BEAM XL
MATERIAL:	FINISH:	WEIGHT:	SCALE: 4:1	



PRODUCT SPEC: 108-1973  
 APPLICATION SPEC: 114-13038  
 CUSTOMER DRAWING

SIZE: A1  
 CAGE CODE: -  
 DRAWING NO: 6600130  
 SHEET 11 OF 12  
 REV F3

REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS	POWER		SIGNAL				POWER	
		P1	P2	1	2	3	4	P3	P4
2-6600130-5	D	PS	PS	E	J	J	J	PS	PS
	C			K	K	K	K		
	B			N	N	N	N		
	A			S	S	S	S		
2P + 16S + 2P									

PART NUMBER	ROWS	POWER			SIGNAL		POWER	
		P1	P2	P3	1	2	P4	P5
2-6600130-6	D	PS	PS	PS	J	J	PS	PS
	C				K	K		
	B				N	N		
	A				H	S		
3ACP + 8S + 2P								

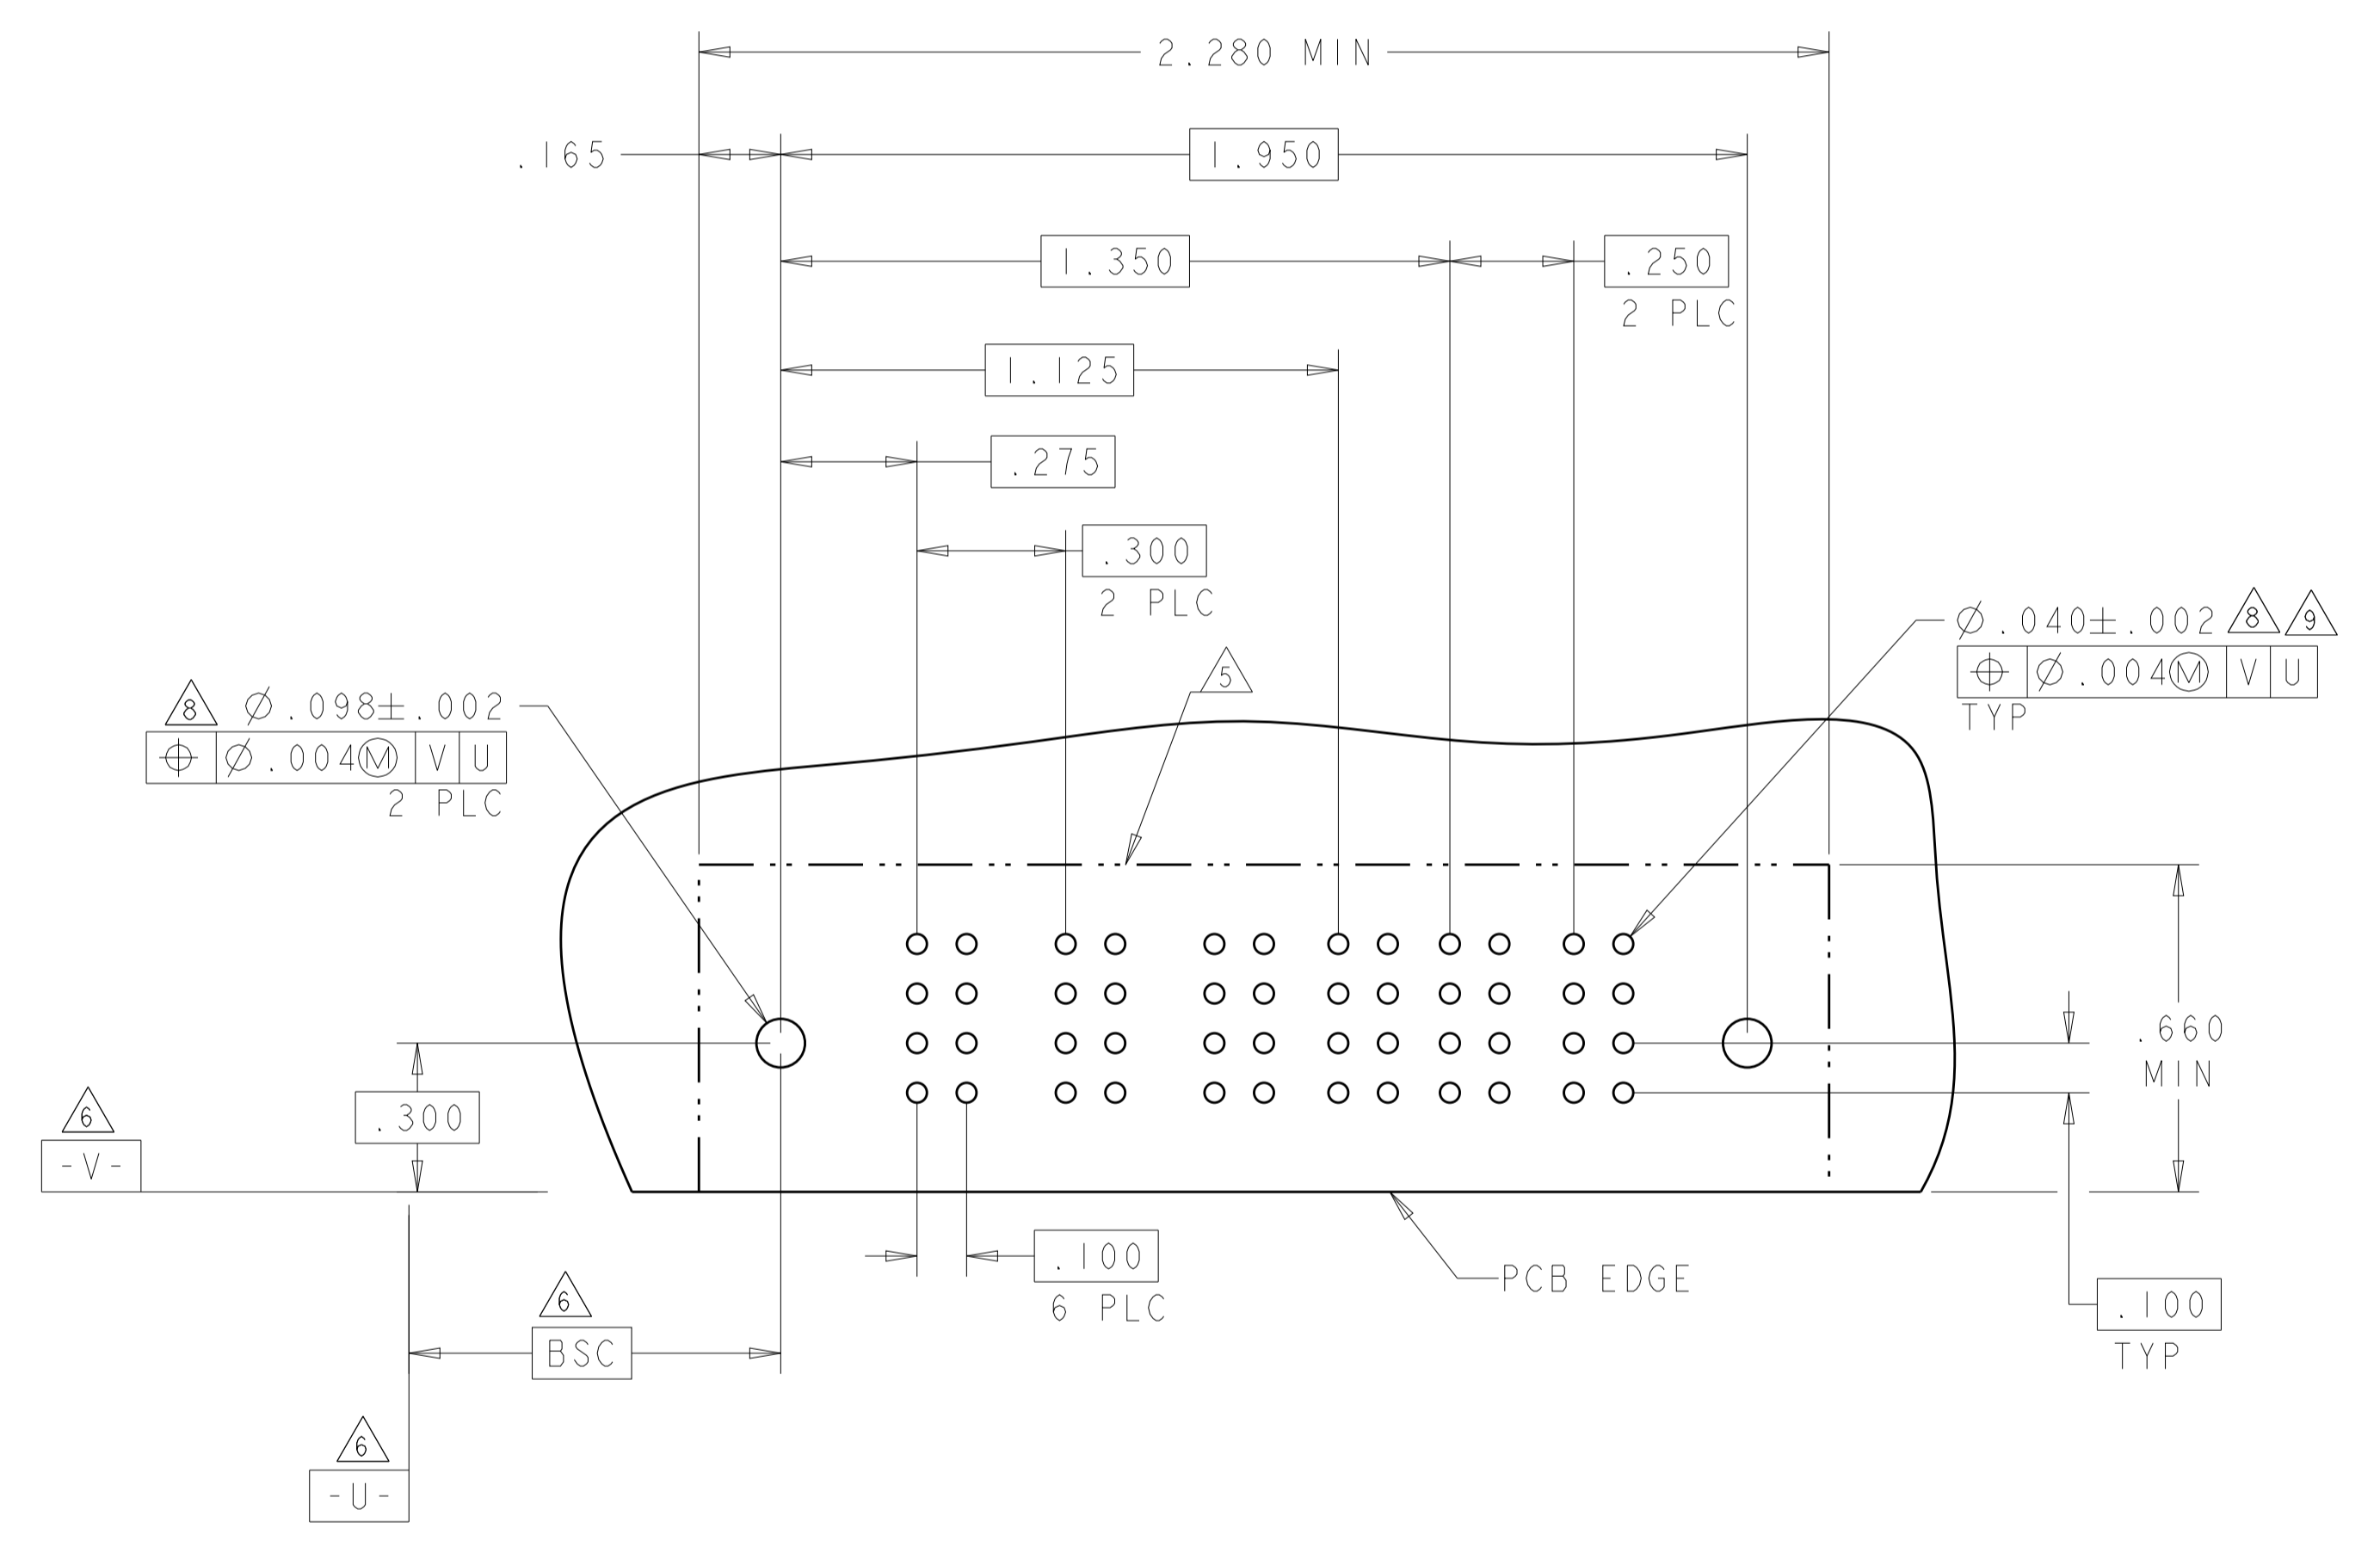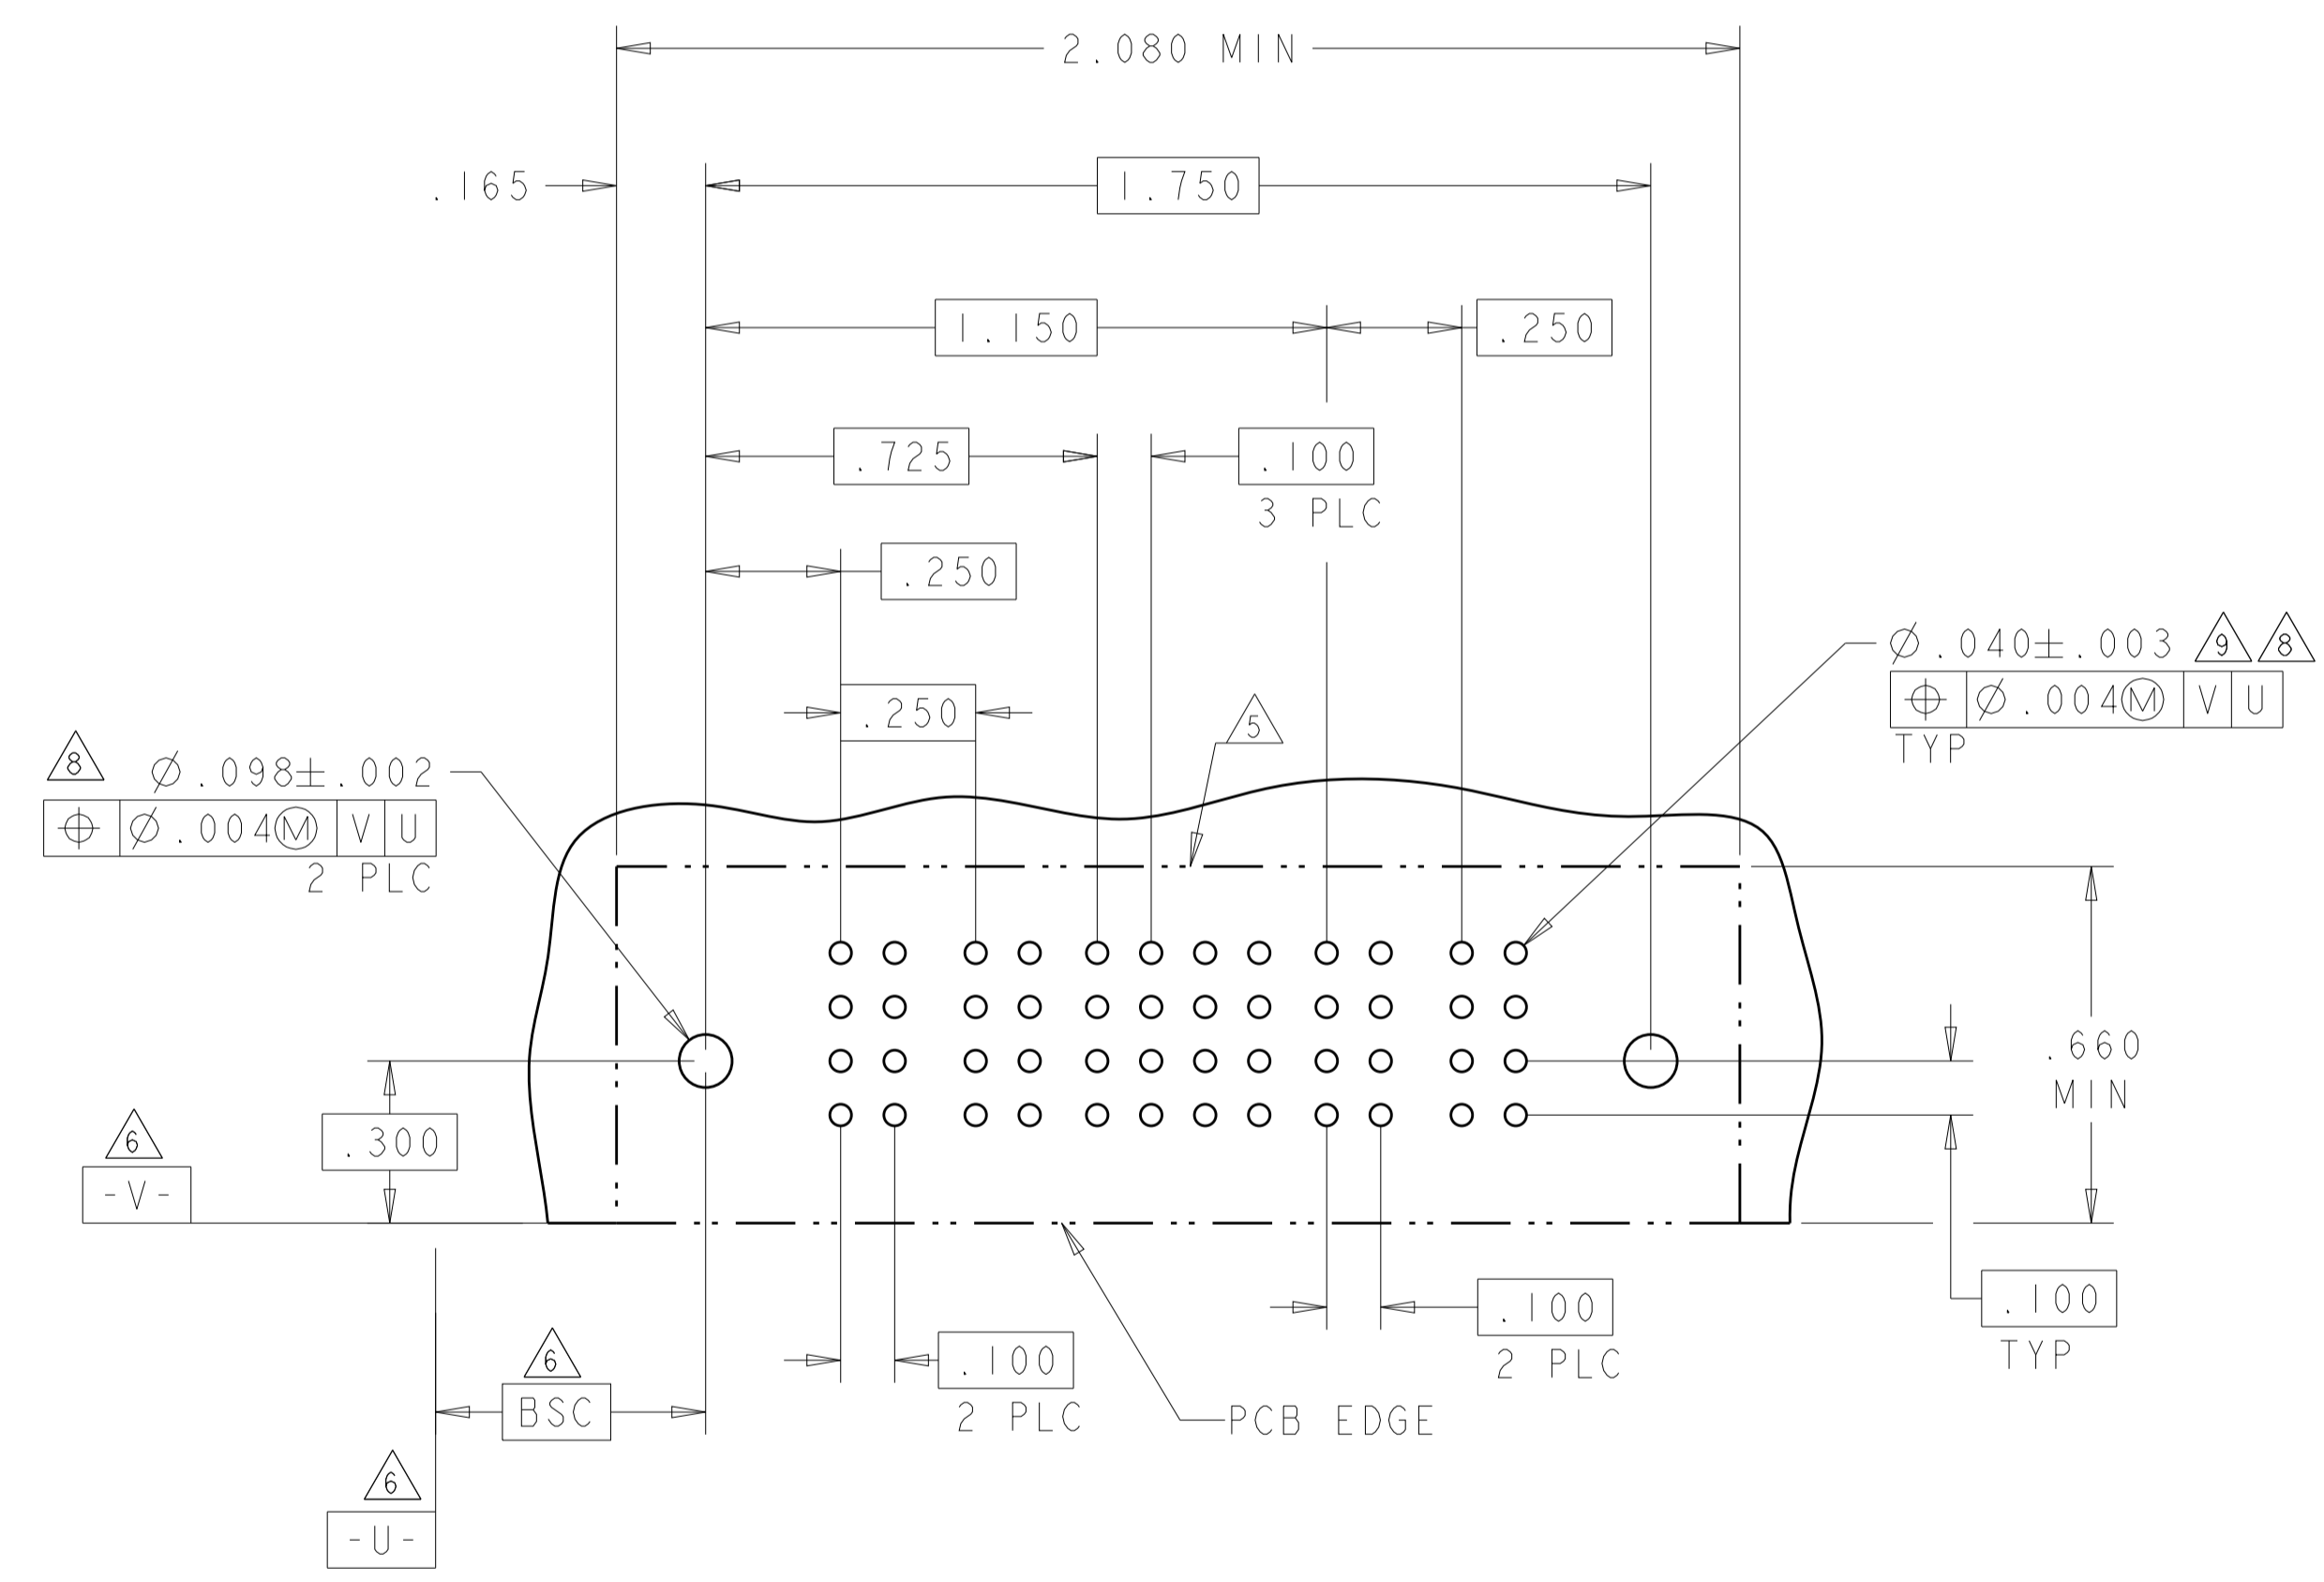

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. GRZYBOWSKI CHK: M. PERCHERKE APVD: M. PERCHERKE	OTIMAROS OTIMAROS	<b>STE</b> TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.7°	PRODUCT SPEC 108-1973	APPLICATION SPEC 114-13038	
MATERIAL	FINISH	WEIGHT	SIZE A1	CAGE CODE C=6600130
CUSTOMER DRAWING			SCALE 4:1	SHEET 12 OF 12