



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





MICROPROCESSOR
CORE MODULE

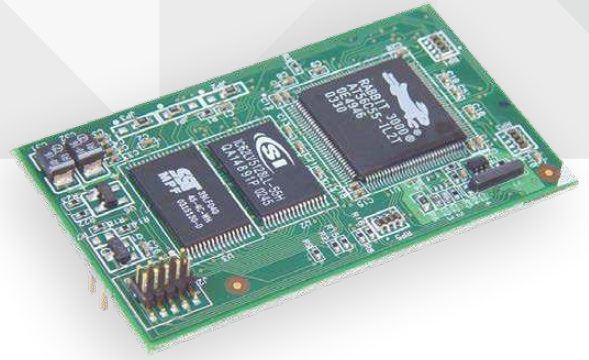

RABBITCORE® RCM3600 SERIES

Extremely compact and low-cost Rabbit® 3000 microprocessor based core module designed for a wide variety of applications

The RabbitCore RCM3600 series is a perfect introduction into embedded control and monitoring. Its small size and ease of integration when paired with Dynamic C® allow engineers to develop a control and monitoring solution for many of today's applications. The RCM3600 mounts directly onto a user-designed motherboard with a single 2x20 dual row IDC header, interfacing with all types of CMOS-compatible digital devices. Built-in low EMI features, including a clock spectrum spreader, practically eliminate EMI problems, which helps with passing CE and RF emissions tests.

Rabbit hardware and Dynamic C are designed in a complementary fashion for maximum performance and ease of use in embedded systems. The additional software components in Dynamic C allow you to add functionality for customized embedded applications.


BENEFITS

- Rabbit 3000 microprocessor at 22 MHz
- Up to 512K Flash/512K SRAM
- 33 parallel digital I/O with configurable options
- 4 serial ports (IrDA, HDLC, async, SPI)
- 5 VDC input, 3.3VDC interface
- Compact footprint: 2.11" x 1.23" x 0.62" (54 mm x 31 mm x 16 mm)
- Ready-made platform for fast time-to-market – save up to 3 months of design integration time
- Low-cost embedded microprocessor module

APPLICATION EXAMPLE



RELATED PRODUCTS

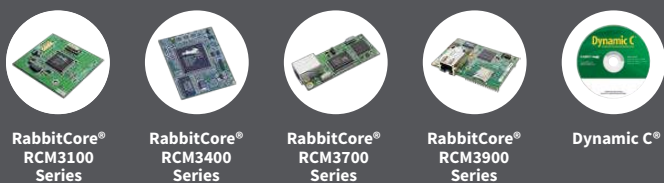


SPECIFICATIONS

RCM3600

RCM3610

FEATURE

MICROPROCESSOR	Rabbit® 3000 at 22 MHz	
FLASH MEMORY	512K	256K
SRAM	512K	128K
BACKUP BATTERY	Connection for user-supplied backup battery (to support RTC and SRAM)	
GENERAL-PURPOSE I/O	33 parallel digital I/O lines: <ul style="list-style-type: none"> • 31 configurable I/O • 2 fixed outputs 	
ADDITIONAL I/O	Reset	
AUXILIARY I/O BUS	Can be configured for 8 data lines and 5 address lines (shared with parallel I/O lines), plus I/O read/write	
SERIAL PORTS	Four 3.3V CMOS-compatible ports configurable as: <ul style="list-style-type: none"> • 4 asynchronous serial ports (with IrDA) or • 3 clocked serial ports (SPI) plus 1 HDLC (with IrDA) or • 1 clocked serial port (SPI) plus 2 HDLC serial ports (with IrDA) 	
SERIAL RATE	Maximum asynchronous baud rate = CLK/8	
SLAVE INTERFACE	A slave port allows the RCM3600 to be used as an intelligent peripheral device slaved to a master processor, which may either be another Rabbit 3000 or any other type of processor	
REAL-TIME CLOCK	Yes	
TIMERS	Ten 8-bit timers (6 cascadable), one 10-bit timer with 2 match registers	
WATCHDOG/SUPERVISOR	Yes	
PULSE-WIDTH MODULATORS	4 PWM output channels with 10-bit free-running counter and priority interrupts	
INPUT CAPTURE/QUADATURE DECODER	2-channel input capture can be used to time input signals from various port pins <ul style="list-style-type: none"> • 1 quadrature decoder unit accepts inputs from external incremental encoder modules or • 1 quadrature decoder unit shared with 2 PWM channels 	
POWER	5V ±0.25 VDC 60 mA @ 22.1 MHz, 5V; 38 mA @ 11.06 MHz, 5V	
OPERATING TEMPERATURE	-40° C to +85° C	
HUMIDITY	5% to 95%, non-condensing	
CONNECTORS	One 2 × 20, 0.1" pitch	
BOARD SIZE	1.23" × 2.11" × 0.62" (31 mm × 54 mm × 16 mm)	

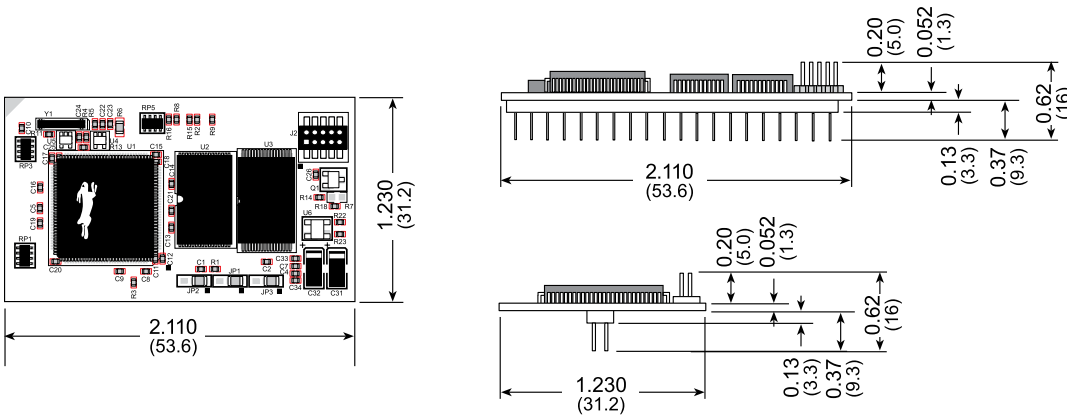

PART NUMBERS

DESCRIPTION

20-101-0672	RCM3600
20-101-0673	RCM3610

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2016 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001599
C2/816

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

