



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





ETHERNET-ENABLED
SINGLE-BOARD
COMPUTER



RABBIT SBC BL2600 SERIES

Best suited for industrial control applications
and is a low-cost PLC alternative

The BL2600 series represents a class of advanced single-board computers that incorporates the powerful Rabbit 3000 microprocessor, Flash memory and RS-232/RS-485 serial ports. Additional module variants enable data logging of up to 1 GB in data storage. Functionality of the BL2600 series can be expanded using optional RabbitNet™ expansion cards.

The BL2600 series can be connected via two mechanisms: Dual-entry IDC through-hole sockets, which allow header mounting on either side of the board, and polarized locking industry-standard friction-lock connectors that enable rapid assembly with a wire harnesses. These connectors provide

dependable cable harness connectivity to I/O. RabbitNet expansion boards are available (including A/D, D/A, digital I/O and keypad/display interface cards) to interface via the two multiplexed SPI RS-422 ports.

BENEFITS

- Rabbit® 3000 microprocessor at 44 MHz
- 10/100Base-T Ethernet, RJ-45
- 512K Flash/512K SRAM
- 36 digital I/O (configurations include protected digital inputs, sinking/sourcing outputs, high current outputs)
- 12 analog channels: eight 11-bit A/D, four 12-bit D/A buffered outputs
- RabbitNet expansion ready
- Multiple “core module” options allow flexibility in functionality

RELATED PRODUCTS



Rabbit® SBC
BL2100
Series



Rabbit® SBC
BL4S200
Series



Rabbit® SBC
BL4S100
Series




ConnectCore®
6 SBC



RabbitCore®
RCM3000
Series

APPLICATION EXAMPLE

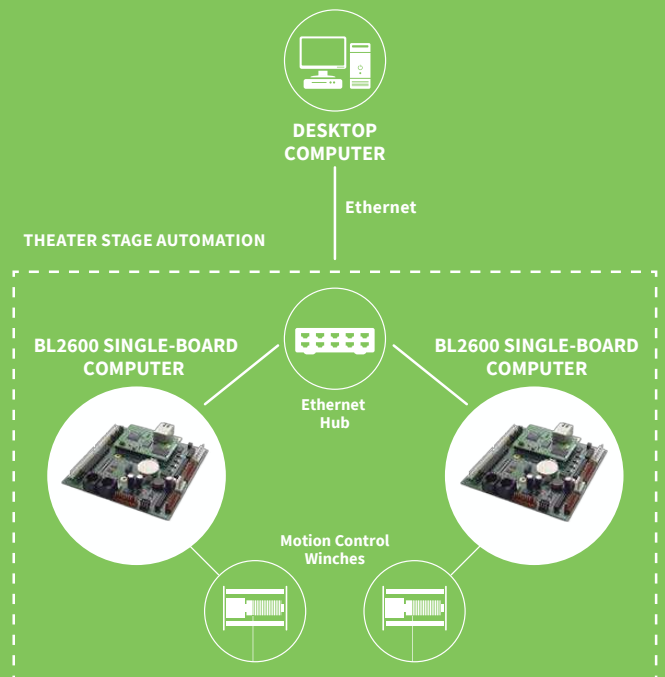

SPECIFICATIONS	BL2600	BL2610
-----------------------	---------------	---------------

FEATURE		
MICROPROCESSOR	Rabbit® 3000 at 44 MHz	Rabbit® 3000 at 29 MHz
ETHERNET PORT	10/100Base-T, 3 LEDs	None
FLASH MEMORY	512K (standard)	512K (standard)
PROGRAM EXECUTION SRAM	512K	None
DATA SRAM	256K	512K
BACKUP BATTERY	Panasonic CR2477 or equivalent 3V lithium coin type, 950 mA-h standard, socket-mounted	
CONFIGURABLE I/O	16 individually software-configurable I/O channels may be configured as digital inputs ± 36 VDC, switching threshold 1.5V typical, or as sinking digital outputs up to 40V, 200 mA each	
DIGITAL INPUTS	8 inputs hardware-configurable pull-up or pull-down, ± 36 VDC, switching threshold 1.4V typical	
HIGH-CURRENT DIGITAL OUTPUTS	4 outputs individually software-configurable as sinking or sourcing, +40VDC, 2A max. per channel	
ANALOG INPUTS	Eight 11-bit res. channels, software-selectable ranges unipolar: 1, 2, 2.5, 5, 10, 20VDC; bipolar ± 1 , ± 2 , ± 5 , ± 10 VDC; 4 channels can be hardware-configured for 4–20 mA; 1 M Ω input impedance, up to 4,100 samples/s	
ANALOG OUTPUTS	Four 12-bit res. channels, buffered, 0–10VDC, ± 10 VDC, and 4–20 mA, update rate 12 kHz	
SERIAL PORTS	5 serial ports: <ul style="list-style-type: none"> • 1 RS-485 or 1 RS-232 • 2 RS-232 or 1 RS-232 (with CTS/RTS) • 1 clocked serial port multiplexed to 2 RS-422 SPI master ports • 1 serial port dedicated for programming/debug 	
SERIAL RATE	Max. asynchronous rate = CLK/8, Max. synchronous rate = CLK/2	
CONNECTORS	<ul style="list-style-type: none"> • RJ-45 connectors: 1 Ethernet and 2 RabbitNet™ • Friction-lock connectors: 2 polarized 9-position terminals with 0.1" pitch; three 4-position power terminals with 0.156" pitch; two 20-position terminals with 0.1" pitch (2 \times 20 IDC option); one 13-position terminal with 0.1" pitch (2 \times 13 IDC option); one 10-position terminal with 0.1" pitch (2 \times 7 IDC option) • Programming port: 2 \times 5 IDC, 1.27 mm pitch (BL2600), 2 \times 5 IDC, 2 mm pitch (BL2610) 	
REAL-TIME CLOCK	Yes	
TIMERS	One 10-bit timer with 2 match registers	
POWER	Yes	
WATCHDOG/SUPERVISOR	9–36 VDC, 12W max.	
OPERATING TEMPERATURE	–40° C to +70° C (–40° C to +85° C without battery)	
HUMIDITY	5 to 95%, non-condensing	
BOARD SIZE	4.85" \times 4.96" \times 1.00" (123 mm \times 126 mm \times 25 mm)	

PART NUMBERS	DESCRIPTION
---------------------	--------------------

20-101-0889	BL2600. 10/100Base-T Ethernet
20-101-0891	BL2610. No Ethernet

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001596
C1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

