



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

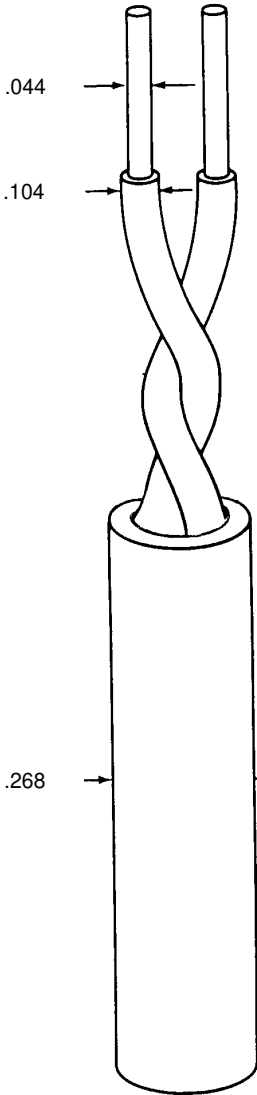

SPECIFICATION CONTROL DRAWING		2018D0309
CHEMINAX	120 OHM, AWG 18, 19 STRANDS OF .0092, SXL CONDUCTOR, TWISTED PAIR CABLE, J1939-15 COMPLIANT	Date: 10-2-14 Revision: E
THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.		
CONSTRUCTION DETAILS		ELECTRICAL CHARACTERISTICS
<p>DIMENSIONS ARE NOMINAL VALUES IN INCHES, UNLESS OTHERWISE DESIGNATED.</p> <p>Components comply with SAE J1128, Type SXL.</p>  <p>CONDUCTORS AWG 18, 19 Strands of .0092, Bare Copper</p> <p>DIELECTRICS Crosslinked Polyolefin Colors - Yellow/Green</p> <p>JACKET Thermorad F</p>		<p>CHARACTERISTIC IMPEDANCE 120 ± 12 ohms, Method D at 1 MHz</p> <p>CAPACITANCE 12.0 pF/ft. (nominal) at 1 MHz</p> <p>VELOCITY OF PROPAGATION 66% (nominal)</p>
		ADDITIONAL REQUIREMENTS
		<p><u>ELECTRICAL</u></p> <p>VOLTAGE WITHSTAND (DIELECTRIC) 1500 volts (rms)</p> <p><u>ENVIRONMENTAL</u></p> <p>FLAMMABILITY Method C</p> <p>HEAT SHOCK 225°C</p> <p>LOW TEMPERATURE-COLD BEND -55°C/7.00 inch mandrel</p> <p><u>PHYSICAL</u></p> <p>JACKET ELONGATION 200% (minimum)</p> <p>TENSILE STRENGTH 2000 lbf/in² (minimum)</p> <p>JACKET THICKNESS .025 inch (minimum), .030 inch (nominal), .040 inch (maximum)</p> <p>CABLE IDENTIFICATION: Outer jacket shall be marked in white ink at 12 inch (nominal) intervals as follows: for product jacketed in USA: "RAYCHEM J1939-15 18 AWG" for product jacketed in Mexico: "RAYCHEM J1939/15 18 AWG"</p>
<p>Designate outer jacket color with a dash number in accordance with MIL-STD-681. Unless otherwise specified, outer jacket color will be black designated by a "-0" appended to the part number, (e.g. 2018D0309-0). Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.</p>		<p>WEIGHT 30.6 lbs/1000 ft. (nominal)</p> <p><u>ENGINEERING REFERENCE</u></p> <p>TEMPERATURE RATING 125°C (maximum)</p>
Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.		
Page 1 of 1	Thermorad, Cheminax, Raychem, TE Connectivity, TE connectivity (logo), and TE (logo) are trademarks.	



Raychem Wire & Cable
501 Oakside Avenue
Redwood City, California 94063-3800
Phone: 1-800-227-8816 Fax: 1-650-361-6297

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

© 2005-2014 Tyco Electronics Corporation. All rights reserved.