



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TSI SPECIFICATION SHEET
CABLE, RADIO FREQUENCY, TWIN CONDUCTOR, BALANCED LINE
TWC-124-1A

MARK: TROMPETER ELECTRONICS TWINAX, TWC-124-1A (*)

(*) VENDOR ID LETTER

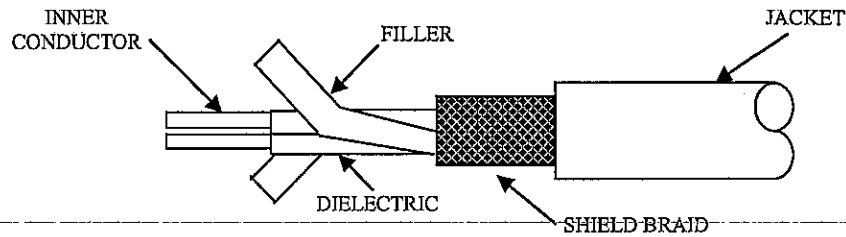

REQUIREMENTS:

1. IMPEDENCE (OF PAIR) ----- 124 ± 5 OHMS
2. OPERATING VOLTAGE ----- 0.3 KVRMS MAX/0.6 KVDC
3. BEND RADIUS ----- 1.5 INCH MIN
4. CAPACITANCE ----- 12.4 PF/FT
5. CONDUCTOR LOOP RESISTANCE ----- 570.6 OHMS/1000 FT MAX
6. VELOCITY OF PROPAGATION ----- 66% NOM
7. ATTENUATION:

FREQUENCY	dB/100 FT NOM	FREQUENCY	dB/100 FT NOM
1 MHz	3.25	40 MHz	11.80
3 MHz	4.40	50 MHz	13.20
4 MHz	4.80	100 MHz	18.70
5 MHz	5.20	200 MHz	26.40
7 MHz	5.60	500 MHz	41.70
10 MHz	5.90	700 MHz	49.40
20 MHz	8.30	1000 MHz	59.00
30 MHz	10.20		
8. WEIGHT ----- 16.1 LB/1000 FT
9. OPERATING TEMPERATURE RANGE ----- -40° C TO $+80^{\circ}$ C

DATE 11/24/04

M Schuch

DESCRIPTION	CONSTRUCTIONAL DETAILS
INNER CONDUCTORS	TWO CONDUCTORS, EACH 7 STRANDS OF AWG SIZE 38 TINNED COPPER WIRE. NOM DIA .012
DIELECTRICS	TWO EACH POLYETHYLENE PER L-P-390C, TYPE II, C1.H, 1 EA GR.3, NATURAL, 1 EA GR.2, BLUE. $.043 \pm .002$ DIA TYP
FILLERS	TWO EACH POLYETHYLENE PER L-P-390C, TYPE II C1.L GR.3 .028 DIA NOM
CABLE CORE	$.085 \pm .003$ OD DIELECTRICS AND FILLERS TO HAVE A RIGHT HAND OR LEFT HAND LAY, 8 TWISTS PER FOOT. A NYLON-THREAD WRAP SHALL THEN BE APPLIED WITH SUFFICIENT COVERAGE TO MAINTAIN THE POSITION OF THE COMPONENTS.
SHIELD	SINGLE BRAID, AWG SIZE 36 TINNED COPPER WIRE SHIELD COVERAGE 93%. $.105$ O.D.
JACKET	BLUE (PER EIA-359-A, MUNSELL COLOR CHART, SYMBOL CENTROID) POLYVINYLCHLORIDE $.150 \pm .005$ O.D.

APPR

DWN DAR

EO 13677

REV J

TSI	DWN	DAR	10-17-00	MATERIAL	CODE IDENT	DRAWING NO.	REV			
	CHK	<i>D. Curran</i>	<i>11/24/04</i>					14949	TWC-124-1A	J
	ENG	<i>Rylee</i>	<i>11-24-04</i>					SCALE -----	DATE 5-15-79	SHEET
	APPR	<i>T. Cla</i>	<i>11-24-04</i>							