



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC GP DIST 00

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
A1		REVISED PER ECO-11-005033	23MAR11	RK	HMR

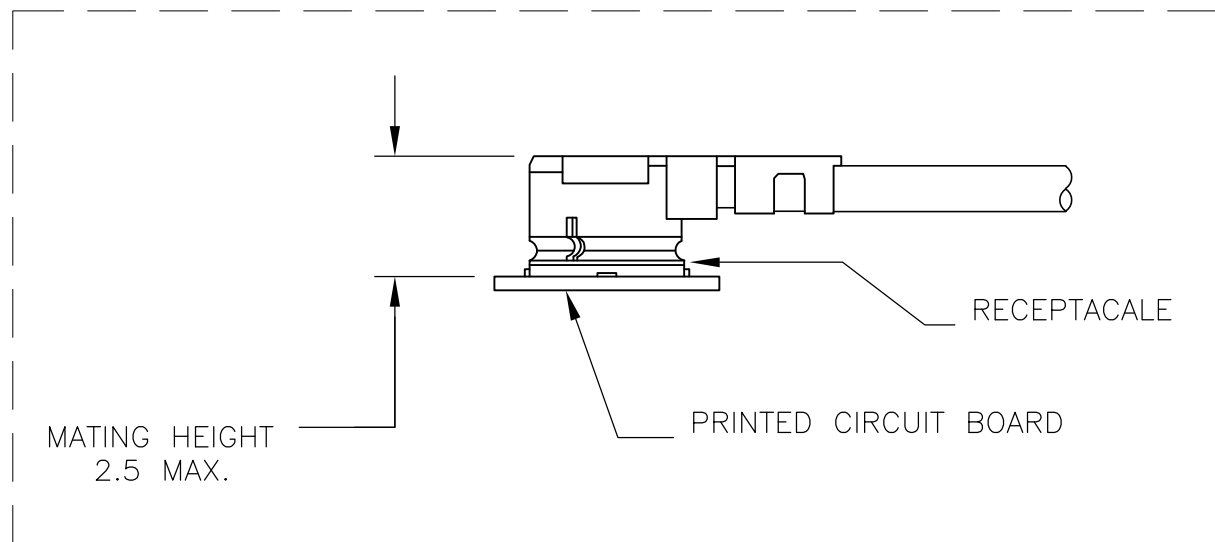

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.

2. HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT. UMCC CONNECTOR TYPE III.

3. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY. HI-POT AT 150 VDC FOR 100mS VSWR: 1.5:1 MAX.

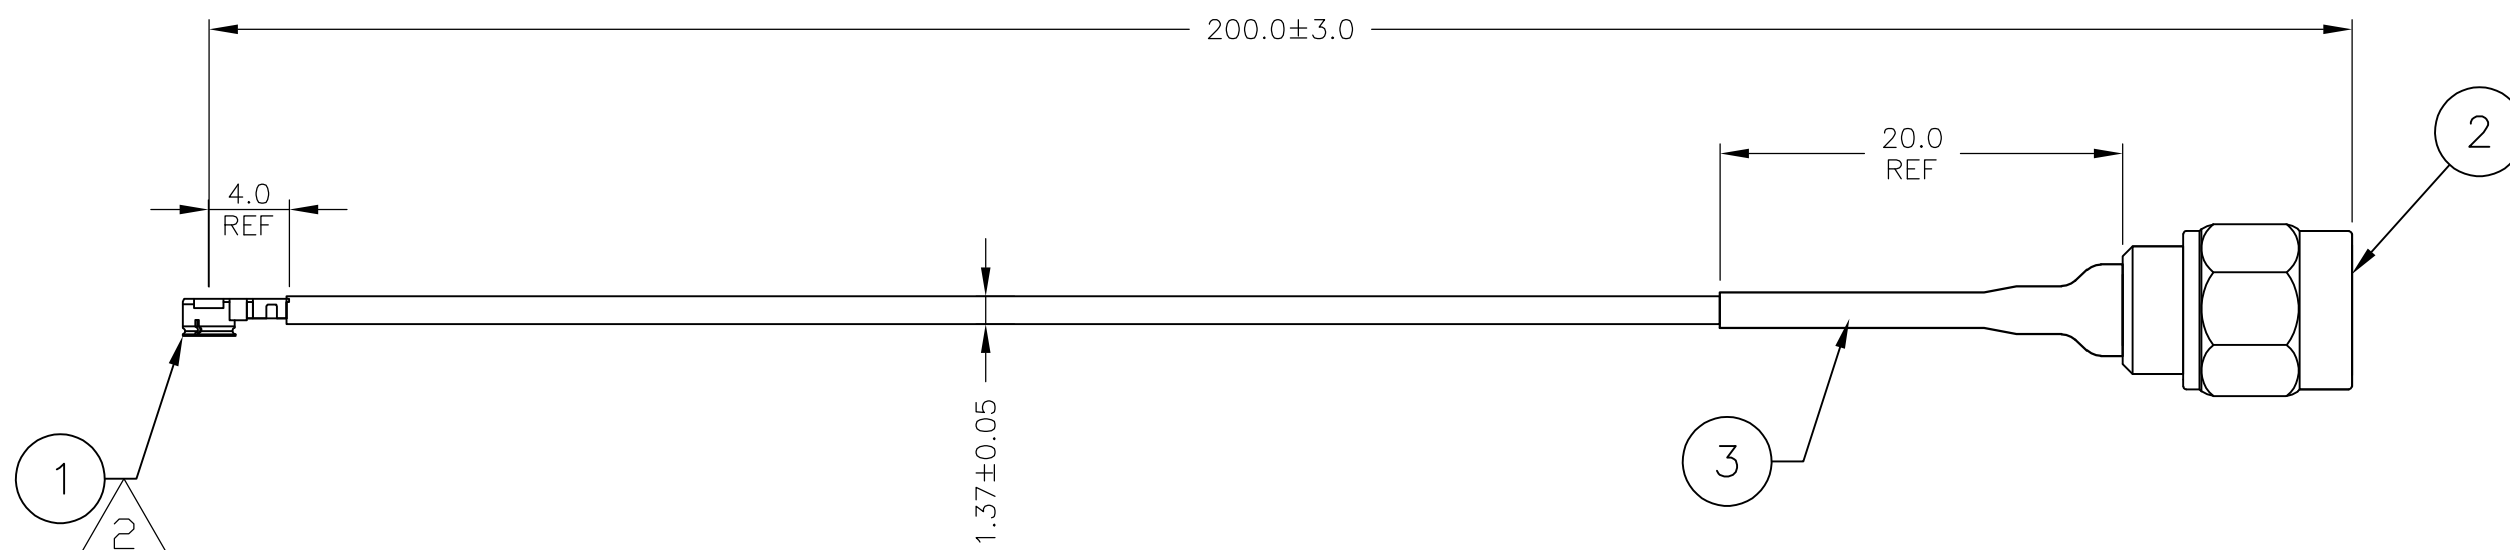

2032439-1

PART NO.

QTY	PC	DESCRIPTION	ITEM
1	PC	TUBING, HEAT SHRINK	3
1	PC	SMA, PLUG	2
1	PC	UMCC, PLUG WITH 1.37 CABLE	1
-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 04/DEC/07 E.C. CLAYBAUGH	TE Connectivity CABLE ASSY, RF, UMCC PLUG TO SMA PLUG [1.37mm CABLE]												
DIMENSIONS: mm [INCHES]		CHK 04/DEC/07 J. ORNER			NAME										
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 04/DEC/07 J. ORNER			SIZE										
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC			± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -
0 PLC	± -														
1 PLC	± -														
2 PLC	± -														
3 PLC	± -														
4 PLC	± -														
ANGLES	± -														
MATERIAL		FINISH	APPLICATION SPEC	DRAWING NO											
-		-	WEIGHT	RESTRICTED TO											
			-	A300779											
				C-2032439											
				CUSTOMER DRAWING											
				SCALE N.T.S.											
				SHEET 1 OF 1											
				REV A1											