

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










Model 2035 Miniature Double Banana **Shorting Bar Plug** CE



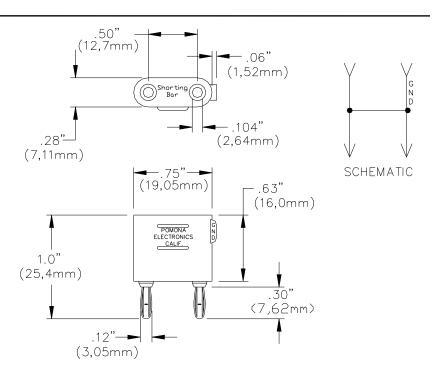

FEATURES:

- Provides a quick and easy means of shorting two inputs of a miniature double banana jack.
- The plug to plug and jack to jack dimension is .500" (12,70mm) which is typical for double miniature banana plugs/jacks.
- ABS body provides insulation protection to the user.
- Shorting adapter has double miniature jacks at the topside for stacking capability.

MATERIALS:

Miniature Double Banana Jack

Body: Gold Plated Brass Miniature Double Banana Plug Body: Gold Plated Brass

Spring: Gold Plated Beryllium Copper

Insulation: ABS molded to banana plug and jack bodies

RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments: 2500 Vrms maximum. For CE compliance: not

intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Current: 5 Amperes

Operating Temperature: +122°F (+50°C) Max.

ORDERING INFORMATION:

Model 2035-0 (Black) Model 2035-2 (Red)

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technical support@pomonatest.com) For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 100 D1093742