



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



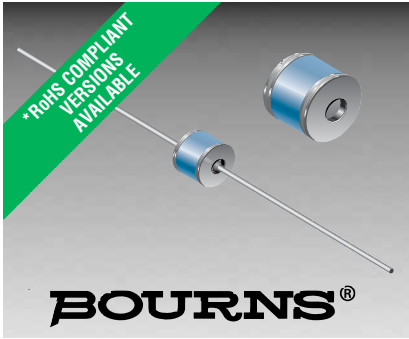

## Features

- Through-hole or cassette mount
- Low capacitance and insertion loss
- High surge current rating
- Fast response to transients
- Compact “mini” size
- RoHS compliant\* version available

## 2039-xxx-XX Precision, Fast Responding, High Voltage Gas Discharge Tube

Bourns now offers miniature through-hole 2-electrode GDT surge protectors with sparkover voltage up to 1100 V. At only 5 mm in diameter, the 2039 Series is ideal for board level protection of high bandwidth applications such as xDSL, cable broadband and high speed Ethernet. The 2039 Series features high energy-handling capability, long and stable life performance and low capacitance of less than 1 pF.

Bourns® GDTs are designed to prevent damage from transient disturbances within rated limits by acting as a “crowbar” to create a short-to-ground circuit during conduction. When an electrical surge exceeds the defined breakdown voltage level of the GDT, the device becomes ionized and rapid conduction takes place. When the surge passes and system voltage returns to normal levels, the GDT returns to its high-impedance (off) state.

### Characteristics


Test Methods per ITU-T K.12, IEEE C62.31 and IEC 61643-311 GDT standards.

Characteristic	Model No.	
	2039-80	2039-110
DC Sparkover $\pm 20\%$ @ 100 V/s	800 V	1100 V
Impulse Sparkover <sup>(1)</sup> @ 1000 V/ $\mu$ s	1250 V	1500 V

<sup>(1)</sup> Impulse Sparkover voltage is defined as typical values of distribution.

Insulation Resistance (IR) .....	100 V .....	> 10 <sup>9</sup> $\Omega$
Arc Voltage .....	1 A .....	~ 10 V
Glow-Arc Transition Current .....		< 0.5 A
Capacitance.....	1 MHz .....	< 1 pF
DC Holdover Voltage <sup>(2)</sup> .....	135 V .....	< 150 ms
Max. Single Discharge <sup>(3)</sup> .....	5 kA.....	> 1 operation
Impulse Discharge Current.....	2.5 kA, 8/20 $\mu$ s <sup>(3)</sup> .....	> 10 operations
	100 A, 10/1000 $\mu$ s.....	> 100 operations
	10 A, 10/1000 $\mu$ s .....	> 1500 operations
Alternating Discharge Current .....	2.5 Arms, 1 s.....	> 10 operations
Operating and Storage Temperature .....		-55 to +85 °C
Climatic Category (IEC 60068-1).....		40/90/21

### Notes:

- UL Recognized  file E313168 (UL 1449).
- Sparkover limits after life +30/-25 %, IR >10<sup>8</sup>  $\Omega$ .
- At delivery AQL 0.65 Level II, DIN ISO 2859.

<sup>(2)</sup> Network applied.


<sup>(3)</sup> DC Sparkover may exceed +30/-25 % but will continue to protect without venting.

\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.


Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.


**Product Dimensions**

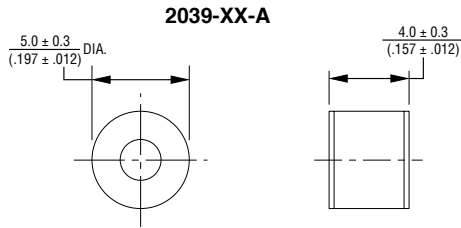

**2039-XX-A**

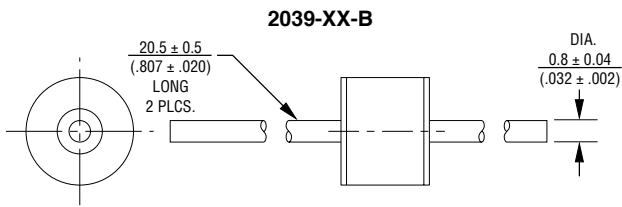

**2039-XX-B**

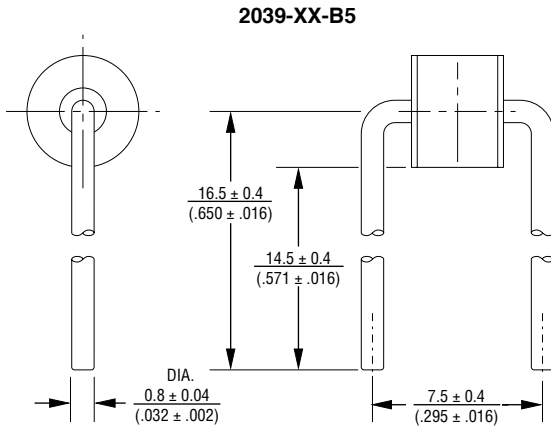


**2039-XX-B5**

2039-xx-B5 not available in reel pack

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

**Packaging Specifications**



Model	Standard Packaging Quantity			
	Bulk (Bag)	Tray	Box	Reel
2039-XX-A	250		1000	
2039-XX-B	100		700	
2039-XX-B5	250		1000	
2039-XX-BT1				1000

**How to Order**

