



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J		P	LTR	DESCRIPTION	DATE	DWN	APVD
		D		REVISED PER ECR-12-005531	23MAR2012	W.W	C.W

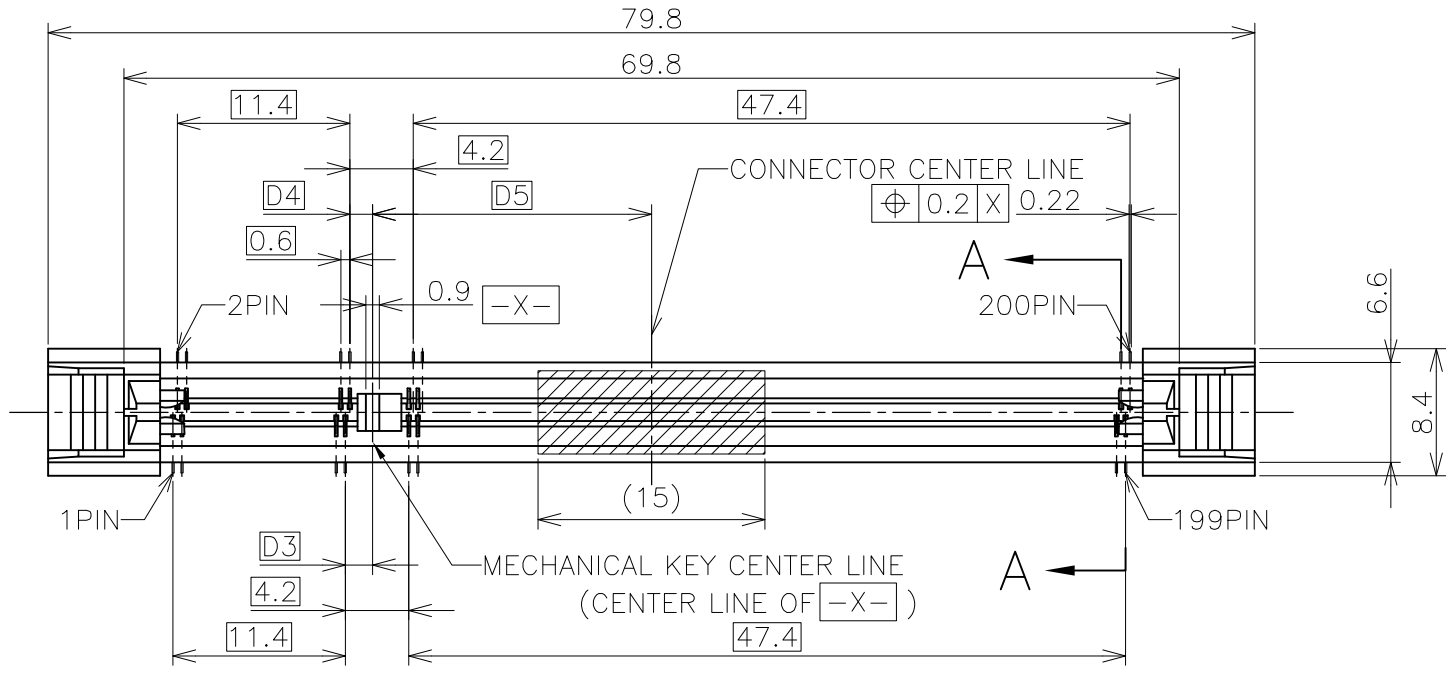

NOTES;(APPLIED TO SHEET 1-2)  
 1. MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0  
 CONTACT: COPPER ARROY  
 EJECOR: HIGH TEMPERATURE THERMO PLASTIC UL94V-0  
 2. FINISH ; CONTACT AREA: GOLD FLASH, ALL OVER NICKEL.  
 SOLDERING AREA: TIN PLATING, ALL OVER NICKEL.  
 △ MECHANICAL KEY POSITION OF CONNECTOR SEE TABLE.  
 △ MODULE TYPE SEE TABLE.  
 △ PWER SUPPLY SEE TABLE.  
 △ THE VOLUME OF LIFTING UP BY EJECTOR.  
 △ ADDITIONAL WIDTH BY EJECTING.  
 △ TOLERANCES NON-CUMULATIVE.

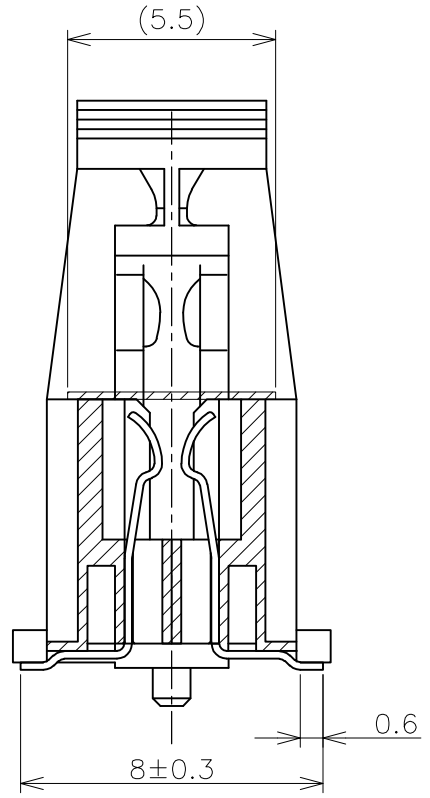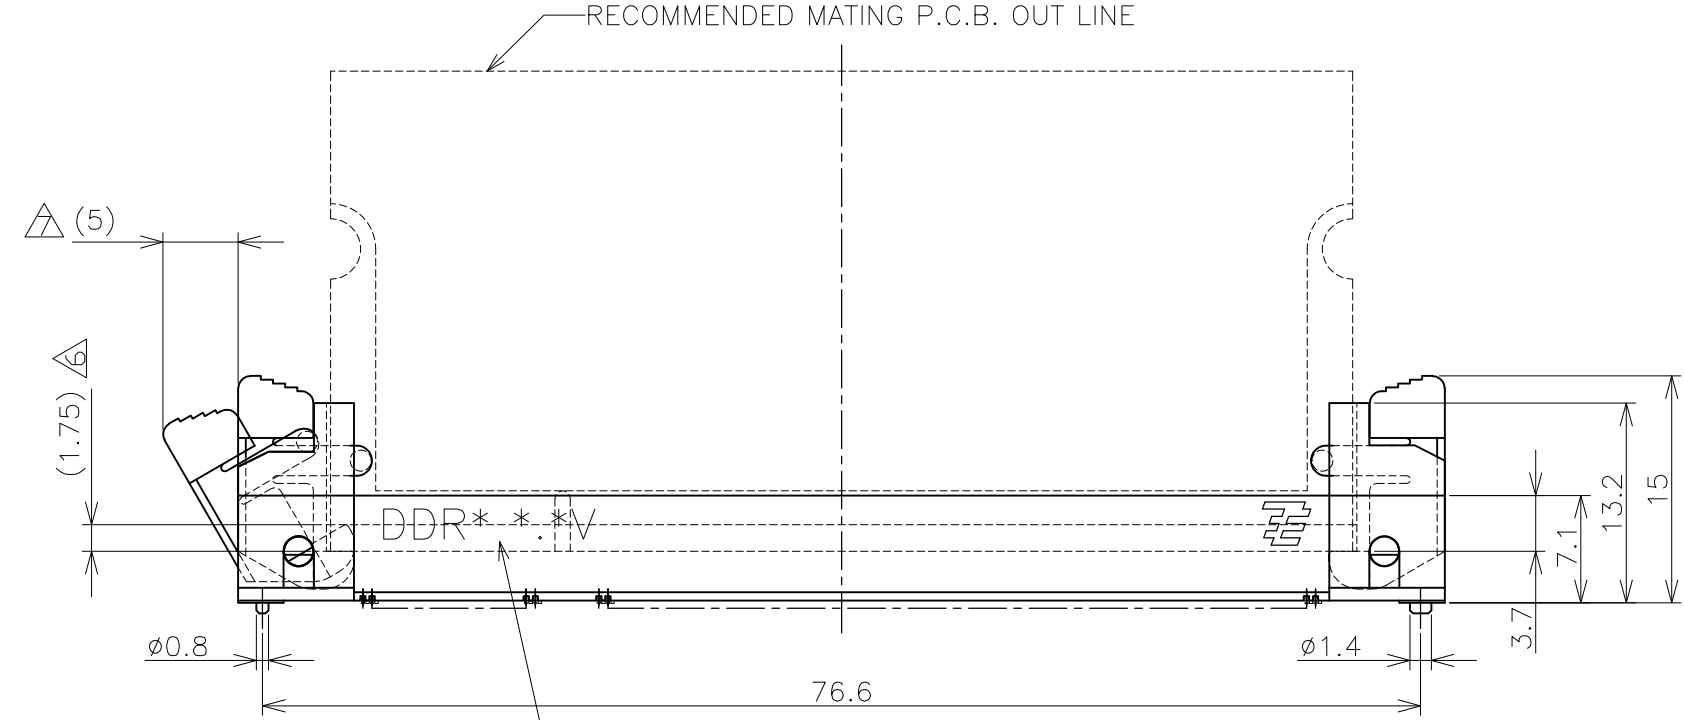

A-A  
(SCALE 5:1)

TYPE	POWER SUPPLY	D5	D4	D3	POS	PART NO.
DDR2	1.8V	17.55	2.4	2.7	200	2040910-3
DDR2	1.8V	17.55	2.4	2.7	200	2040910-2
DDR1	2.5V	18.45	1.5	1.8	200	2040910-1

GENERAL TOERLANCE

10 ≥	±0.2
30 ≥	>10 ; ±0.25
100 ≥	>30 ; ±0.3
ANGLE	±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
単位: 耗	一般公差
MM	
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± 3°
FINISH	SEE NOTES
仕上	SEE NOTES

MATERIAL 材料 SEE NOTES

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	T.FUMIKURA	20NOV2008
CHK	K.IKEGAMI	20NOV2008
APVD	K.IKEGAMI	20NOV2008
PRODUCT SPEC	製品規格	
APPLICATION SPEC	取付適用規格	
WEIGHT	4.77g	
SIZE	A3	CAGE CODE 00779
DRAWING NO	C-2040910	
RESTRICTED TO		

TE Connectivity

DDR SODIMM SOCKET 0.6mm PITCH  
200POS VERTICAL TYPE

SCALE 尺度 2:1 SHEET 1 OF 4 REV D

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

DESCRIPTION

DATE


DWN

APVD

P

LTR


SEE SHEET 1

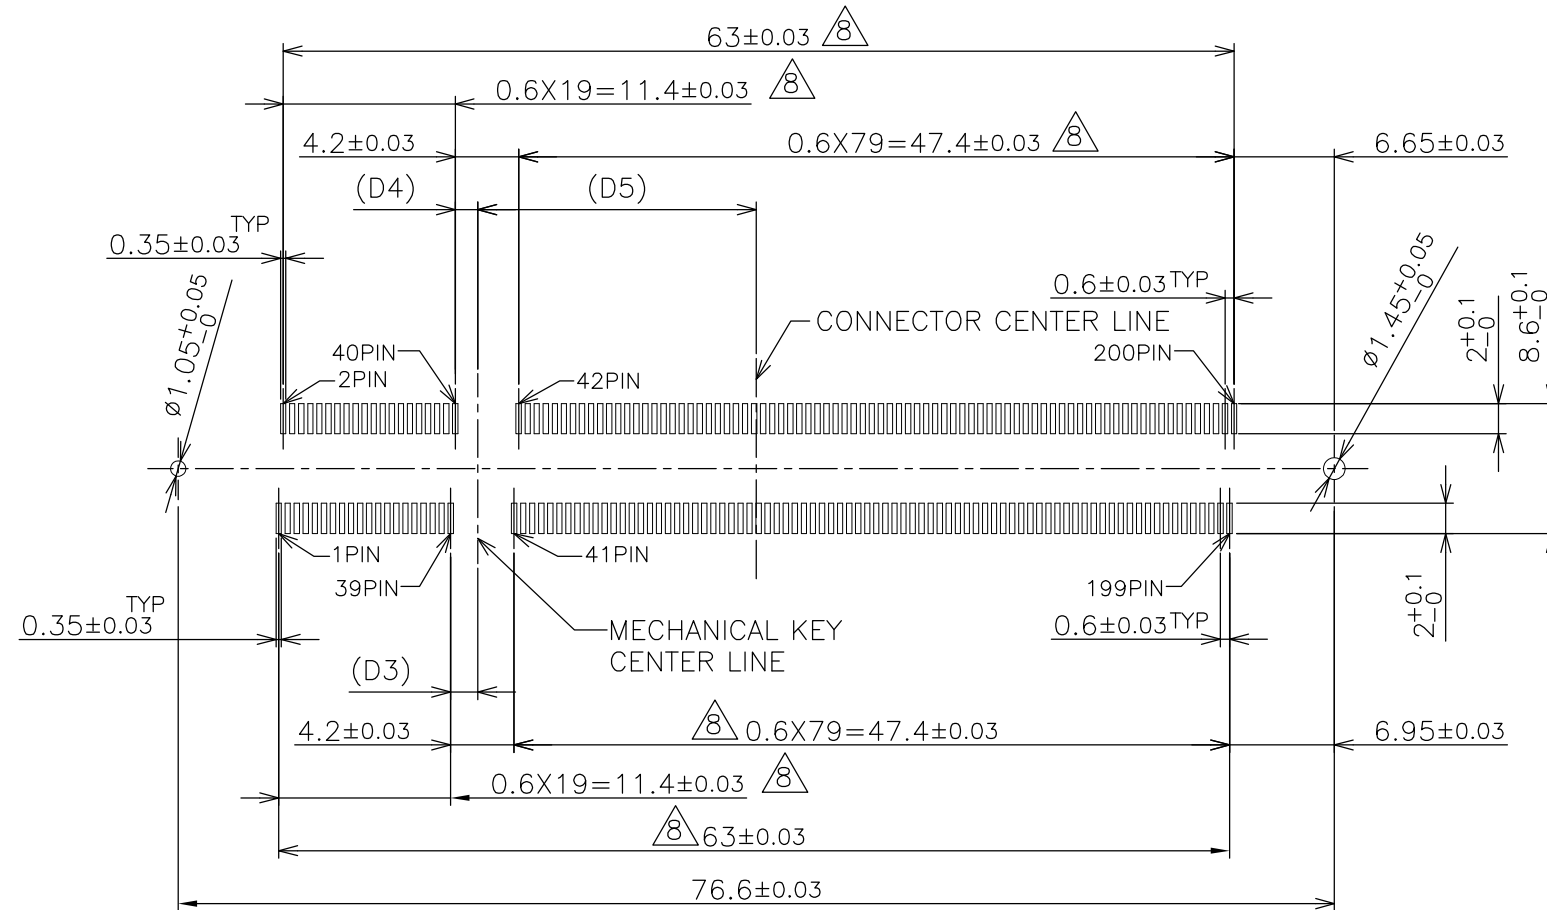

REFERENCE P.C.B PATTERN LAYOUT  
(CONNECTOR MOUNTING SIDE)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
単位: 耗  
MM



MATERIAL  
材料  
SEE NOTES

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:  
一般公差

- 0 PLC ± -
- 1 PLC ± -
- 2 PLC ± -
- 3 PLC ± -
- 4 PLC ± -
- ANGLES ± 3'

FINISH  
仕上  
SEE NOTES

DWN

CHK

APVD

PRODUCT SPEC  
製品規格

APPLICATION SPEC  
取付適用規格

WEIGHT

CUSTOMER DRAWING



NAME  
名称  
DDR SODIMM SOCKET 0.6mm PITCH  
200POS VERTICAL TYPE

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	G-2040910	

SCALE 尺度	SHEET	REV
2:1	2 OF 4	D

THIS DRAWING IS UNPUBLISHED.




RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.





© COPYRIGHT - By -

LOC	DIST
J	/

REVISIONS		DATE	DWN	APVD
P	LTR	DESCRIPTION		
-	-	SEE SHEET 1	-	-

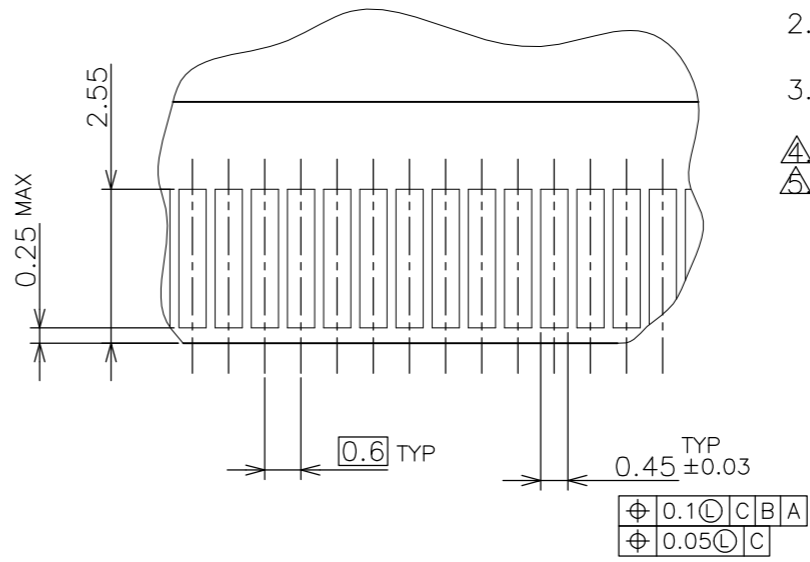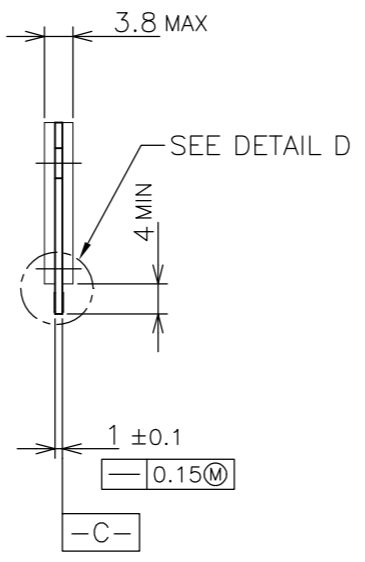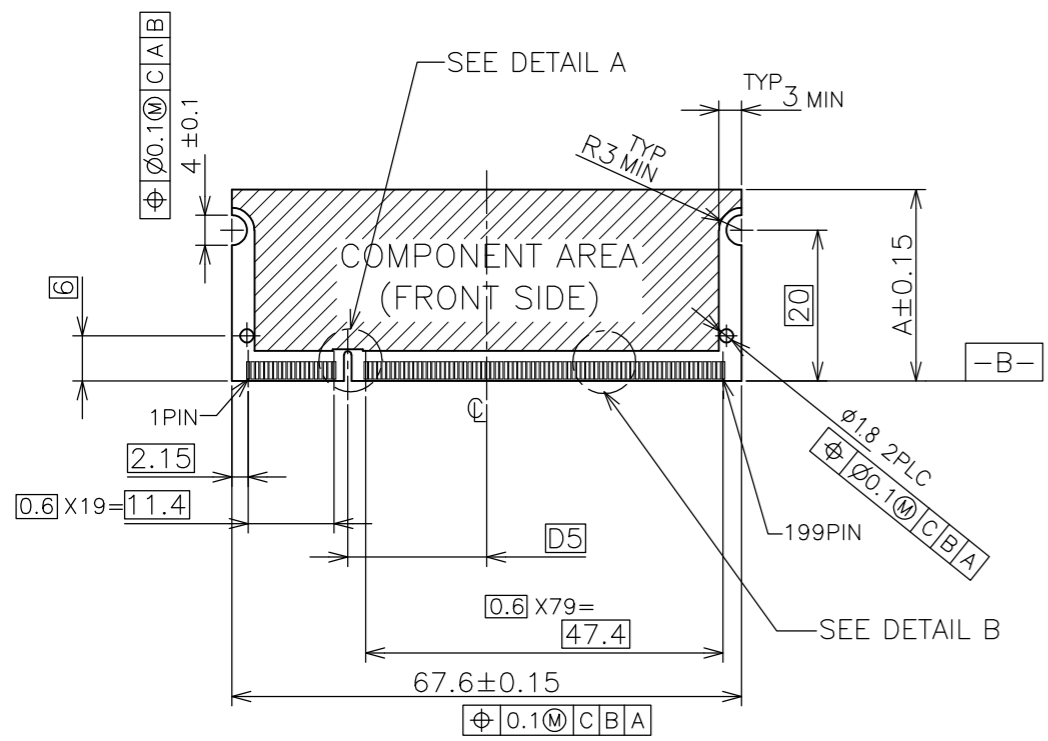

- NOTES: (APPLIED TO SHEET 3)
- TOLERANCES ON ALL DIMENSIONS ± 0.15 UNLESS OTHERWISE SPECIFIED.
  - P.C. BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.
  - FINISH OF PAD : GOLD PLATING 0.00076 MIN. OVER Ni PLATING 0.002 MIN.
- △ NO BURR
- △ CHAMFER 0.25 MAX x 45° IF EXIST.

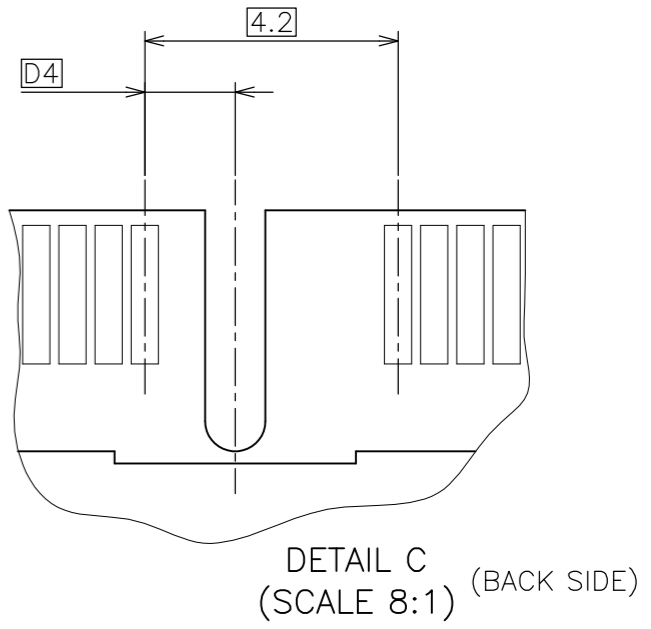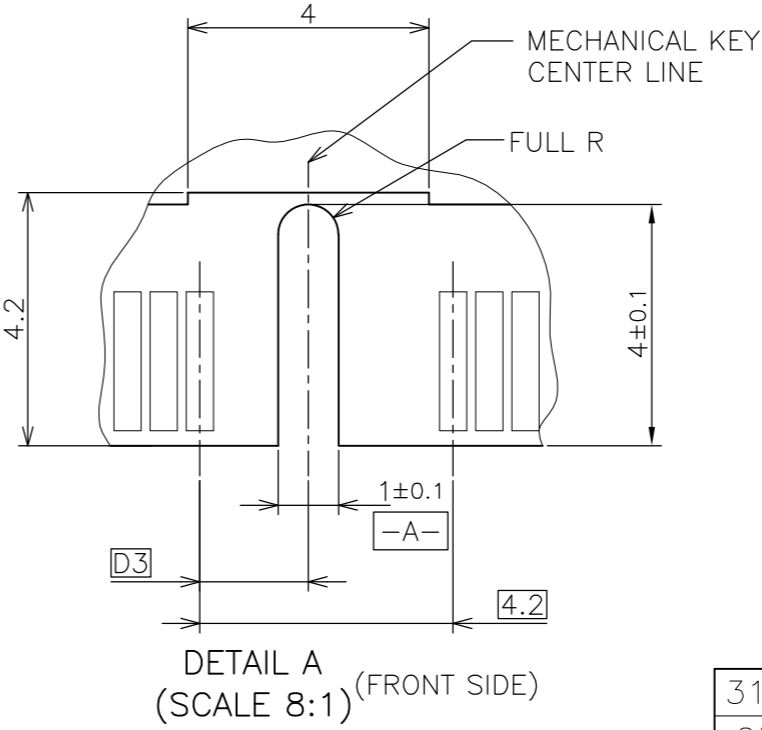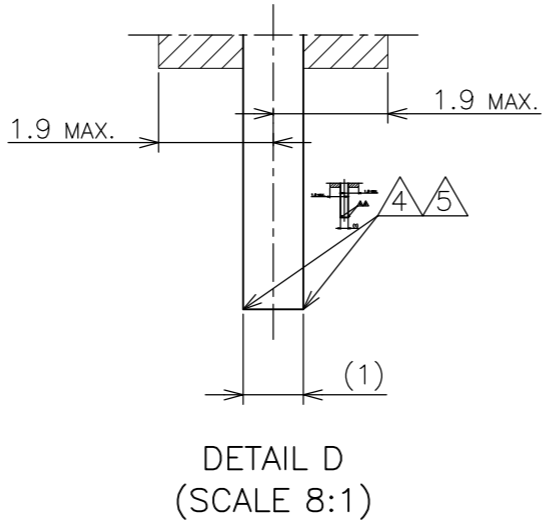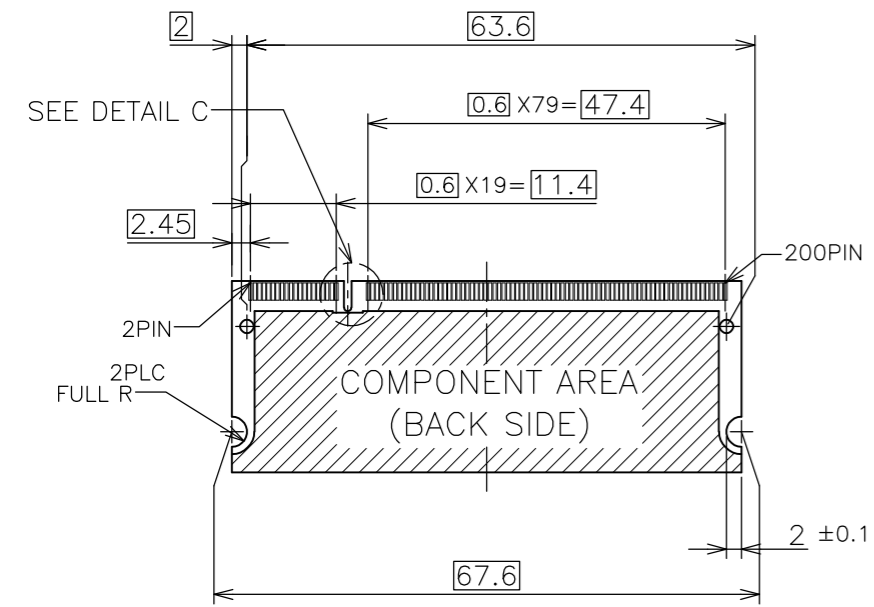

REFERENCE MATING P.C.B CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN
DIMENSIONS: 单位: 耗 MM		CHK
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD
0 PLC ± -		PRODUCT SPEC 製品規格
1 PLC ± -		APPLICATION SPEC 取付適用規格
2 PLC ± -		WEIGHT
3 PLC ± -		CUSTOMER DRAWING
4 PLC ± -		
ANGLES ± -		
FINISH 仕上		
MATERIAL 材料		

31.75	1.8V	17.55	2.4	2.7
25.4	2.5V	18.45	1.5	1.8
A	POWER SUPPLY	D5	D4	D3

STE TE Connectivity



DDR SODIMM SOCKET 0.6mm PITCH 200POS VERTICAL TYPE

NAME 名称	DDR SODIMM SOCKET 0.6mm PITCH 200POS VERTICAL TYPE		
SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C-2040910	


SCALE 尺度	SHEET	REV
1:1	3 OF 4	D

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J		-		SEE SHEET 1	-	-	-

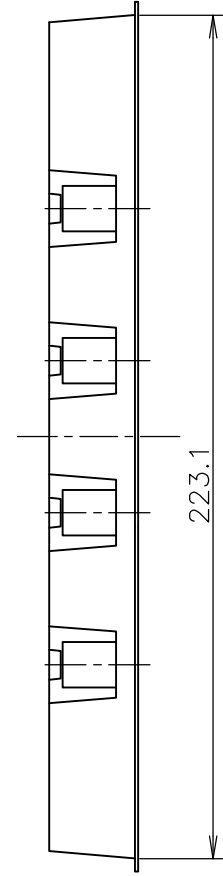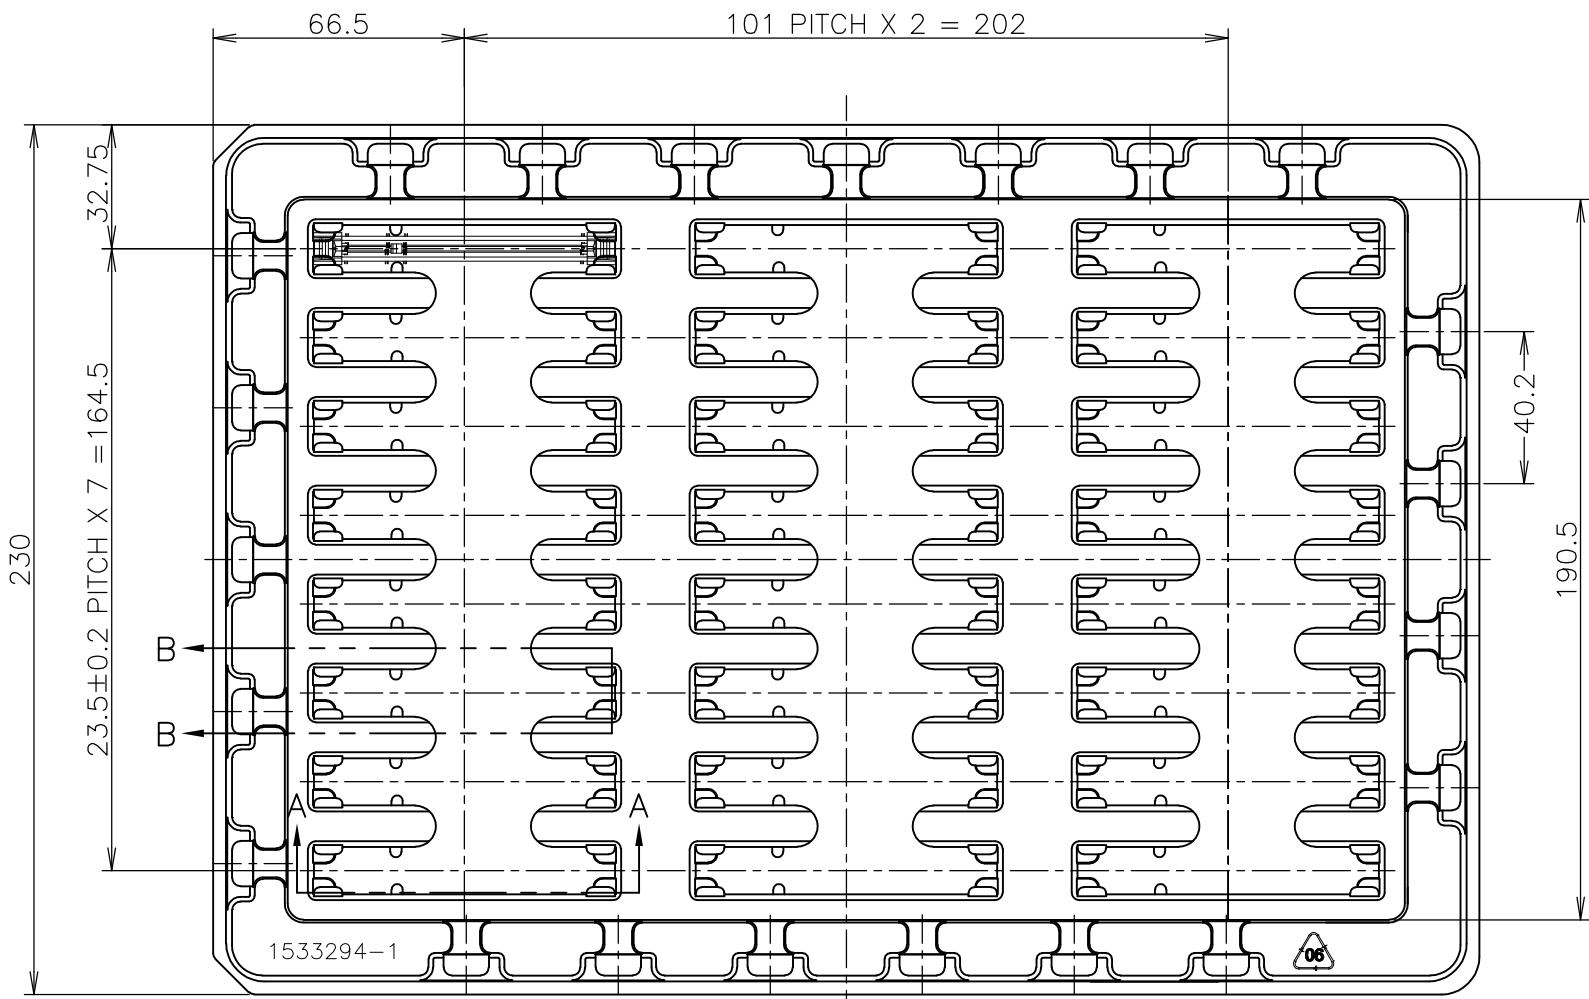

- (APPLIED TO SHEET 4)
1. THE DIRECTION OF EACH CONNECTOR ON A TRAY IS REFERRED TO THIS DRAWING.
  2. GENERAL TOLERANCE: ±0.5, ±3°



B-B (SCALE 1:1)

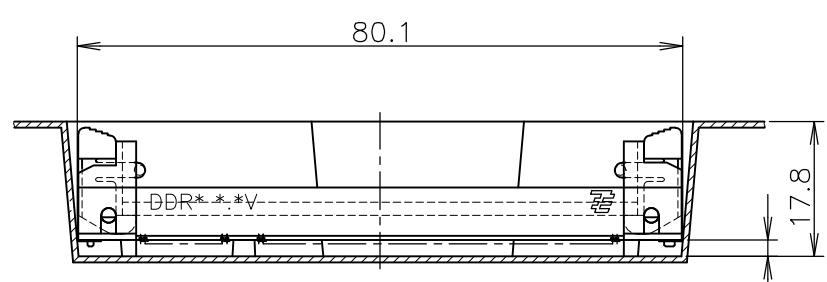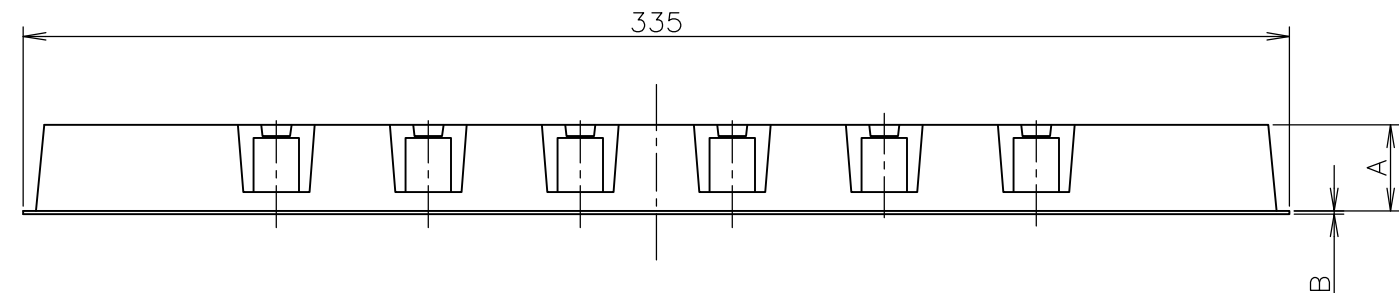

A-A (SCALE 1:1)

1.2	18.8	384EA	96EA	24EA	2040910-3
1.2	22.8	384EA	96EA	24EA	2040910-2
1.2	22.8	384EA	96EA	24EA	2040910-1
B	A	QTY/SHIPPING BOX	QTY/INNER BOX	QTY/TRAY	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 单位: 耗 MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	DWN	TE Connectivity
0 PLC ± 0.5 1 PLC ± 0.5 2 PLC ± 0.5 3 PLC ± 0.5 4 PLC ± 0.5 ANGLES ± 3°		CHK	
MATERIAL 材料	FINISH 仕上	APVD	DDR SODIMM SOCKET 0.6mm PITCH 200POS VERTICAL TYPE
		PRODUCT SPEC 製品規格	SIZE
		APPLICATION SPEC 取付適用規格	CAGE CODE
		WEIGHT	DRAWING NO 番号
			RESTRICTED TO
			A3 00779 C-2040910
			SCALE 尺度 1:2
			SHEET 4 OF 4
			REV D

CUSTOMER DRAWING