



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## Features

- Leadless, surface mount for economical assembly
- Compact mini-size
- Low capacitance and insertion loss
- RoHS compliant\*
-  UL Recognized

## 2055 Series Gas Discharge Tube Surge Protector

Bourns offers a low-cost surface mount (SM) 2-electrode GDT surge protection device. The 2055 Series is ideal for broadband protection due to its ultra-low capacitance. The 2055 Series offers superior protection characteristics suitable for telecommunications, commercial and industrial applications.

### Characteristics

Test Methods per ITU-T (CCITT) K.12 and IEEE C62.31

Characteristic	Model No.					
	2055-23	2055-25	2055-30	2055-35	2055-40	2055-60
DC Sparkover $\pm 20\%$ @ 100 V/s	230 V	250 V	300 V	350 V	400 V	600 V
Impulse Sparkover						
100V/ $\mu$ s	450 V	450 V	500 V	600 V	600 V	800 V
1000V/ $\mu$ s	550 V	550 V	600 V	750 V	700 V	900 V

Insulation Resistance (IR) .....	100 V .....	> 10 <sup>10</sup> $\Omega$
Glow Voltage .....	10 mA.....	~ 80 V
Arc Voltage .....	>2 A.....	~ 12 V
Glow-Arc Transition Current .....		< 1 A
Capacitance.....	1 MHz .....	0.6 pF typical
DC Holdover Voltage <sup>1</sup> .....	>150 V .....	< 150 ms
Impulse Discharge Current.....	2500 A, 8/20 $\mu$ s.....	10 operations
	100 A, 10/1000 $\mu$ s.....	> 300 operations
	10 A, 10/1000 $\mu$ s.....	> 1500 operations
Alternating Discharge Current .....	10 Arms, 9 cycles.....	1 operation min.
	2.5 Arms, 1 sec, 50 Hz.....	10 operations
Operating Temperature.....		-30 to +85 °C

#### Notes:


- UL Recognized component, UL File E153537.
- At delivery AQL 0.65 Level II, DIN ISO 2859.
- Surface Mount (SM) parts may show a temporary increase in DCBD after the solder reflow process. Most devices will recover within 24 hours time. It should be noted that there is no quality defect nor change in protection levels during the temporary change in DCBD.

<sup>1</sup> Network applied.

# 2055 Series Gas Discharge Tube Surge Protector

**BOURNS®**


## Product Dimensions

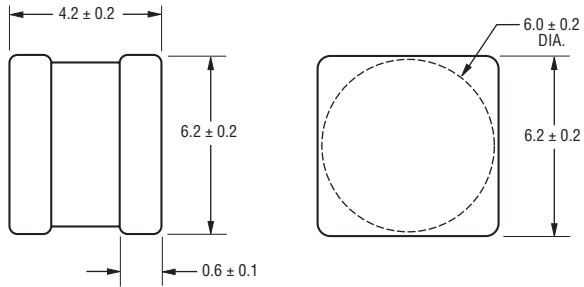


DIMENSIONS: MILLIMETERS

## Packaging Specifications

The Model 2055-xx-SM ships standard reelpack (-RP), 800 pieces per reel, 2,400 pieces per box. Reel is 330 mm in diameter and 16 mm wide.

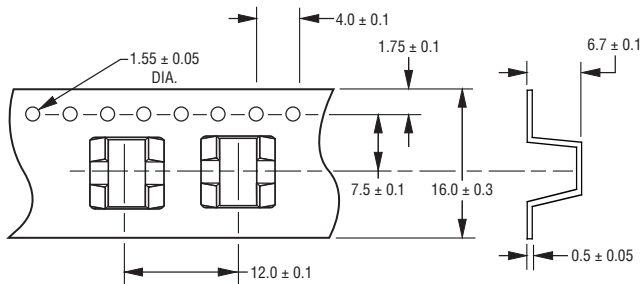

## Recommended Pad Layout



## How to Order

Model Number Designator 2055 - xx - SM - RP LF  
 Voltage (Divided by 10) \_\_\_\_\_  
 Surface Mount \_\_\_\_\_  
 Packaging \_\_\_\_\_  
 RP = Reelpack  
 RoHS Compliance \_\_\_\_\_  
 LF = RoHS Compliant Product

REV. I 03/28/12

Specifications are subject to change without notice.  
 Customers should verify actual device performance in their specific applications.