



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LOC		DIST		REVISIONS			
F	LTR	DESCRIPTION	DATE	DMN	APVD		
Z		REVISED PER ECO-08-012630	22MAY08	HMR	GS		
Z1		REVISED PER ECO-09-020935	09SEP09	KK	AEG		

MOLDED CHARACTERS BOTH SIDES

BLOCK MATERIAL: PHENOLIC, BLACK, PER MIL-M-14, TYPE CFG

AMP, PART NUMBER & DATE CODE MARKED EITHER SIDE.




POST Δ 0.64[.025]x0.64[.025] MATERIAL: BRASS FINISH: SEE TABLE 104 EA

INSERT MATERIAL: STAINLESS STEEL FINISH: PASSIVATED 4 EA

ϕ 1.57[.062] #16 SOCKET CONTACT MATERIAL: BRASS FINISH: Δ 104 EA

MATING FACE

CENTER FASTENER 1/4-28UNF-2B x 8.89 \pm 0.51[.350 \pm .020] DEEP MATERIAL: STAINLESS STEEL

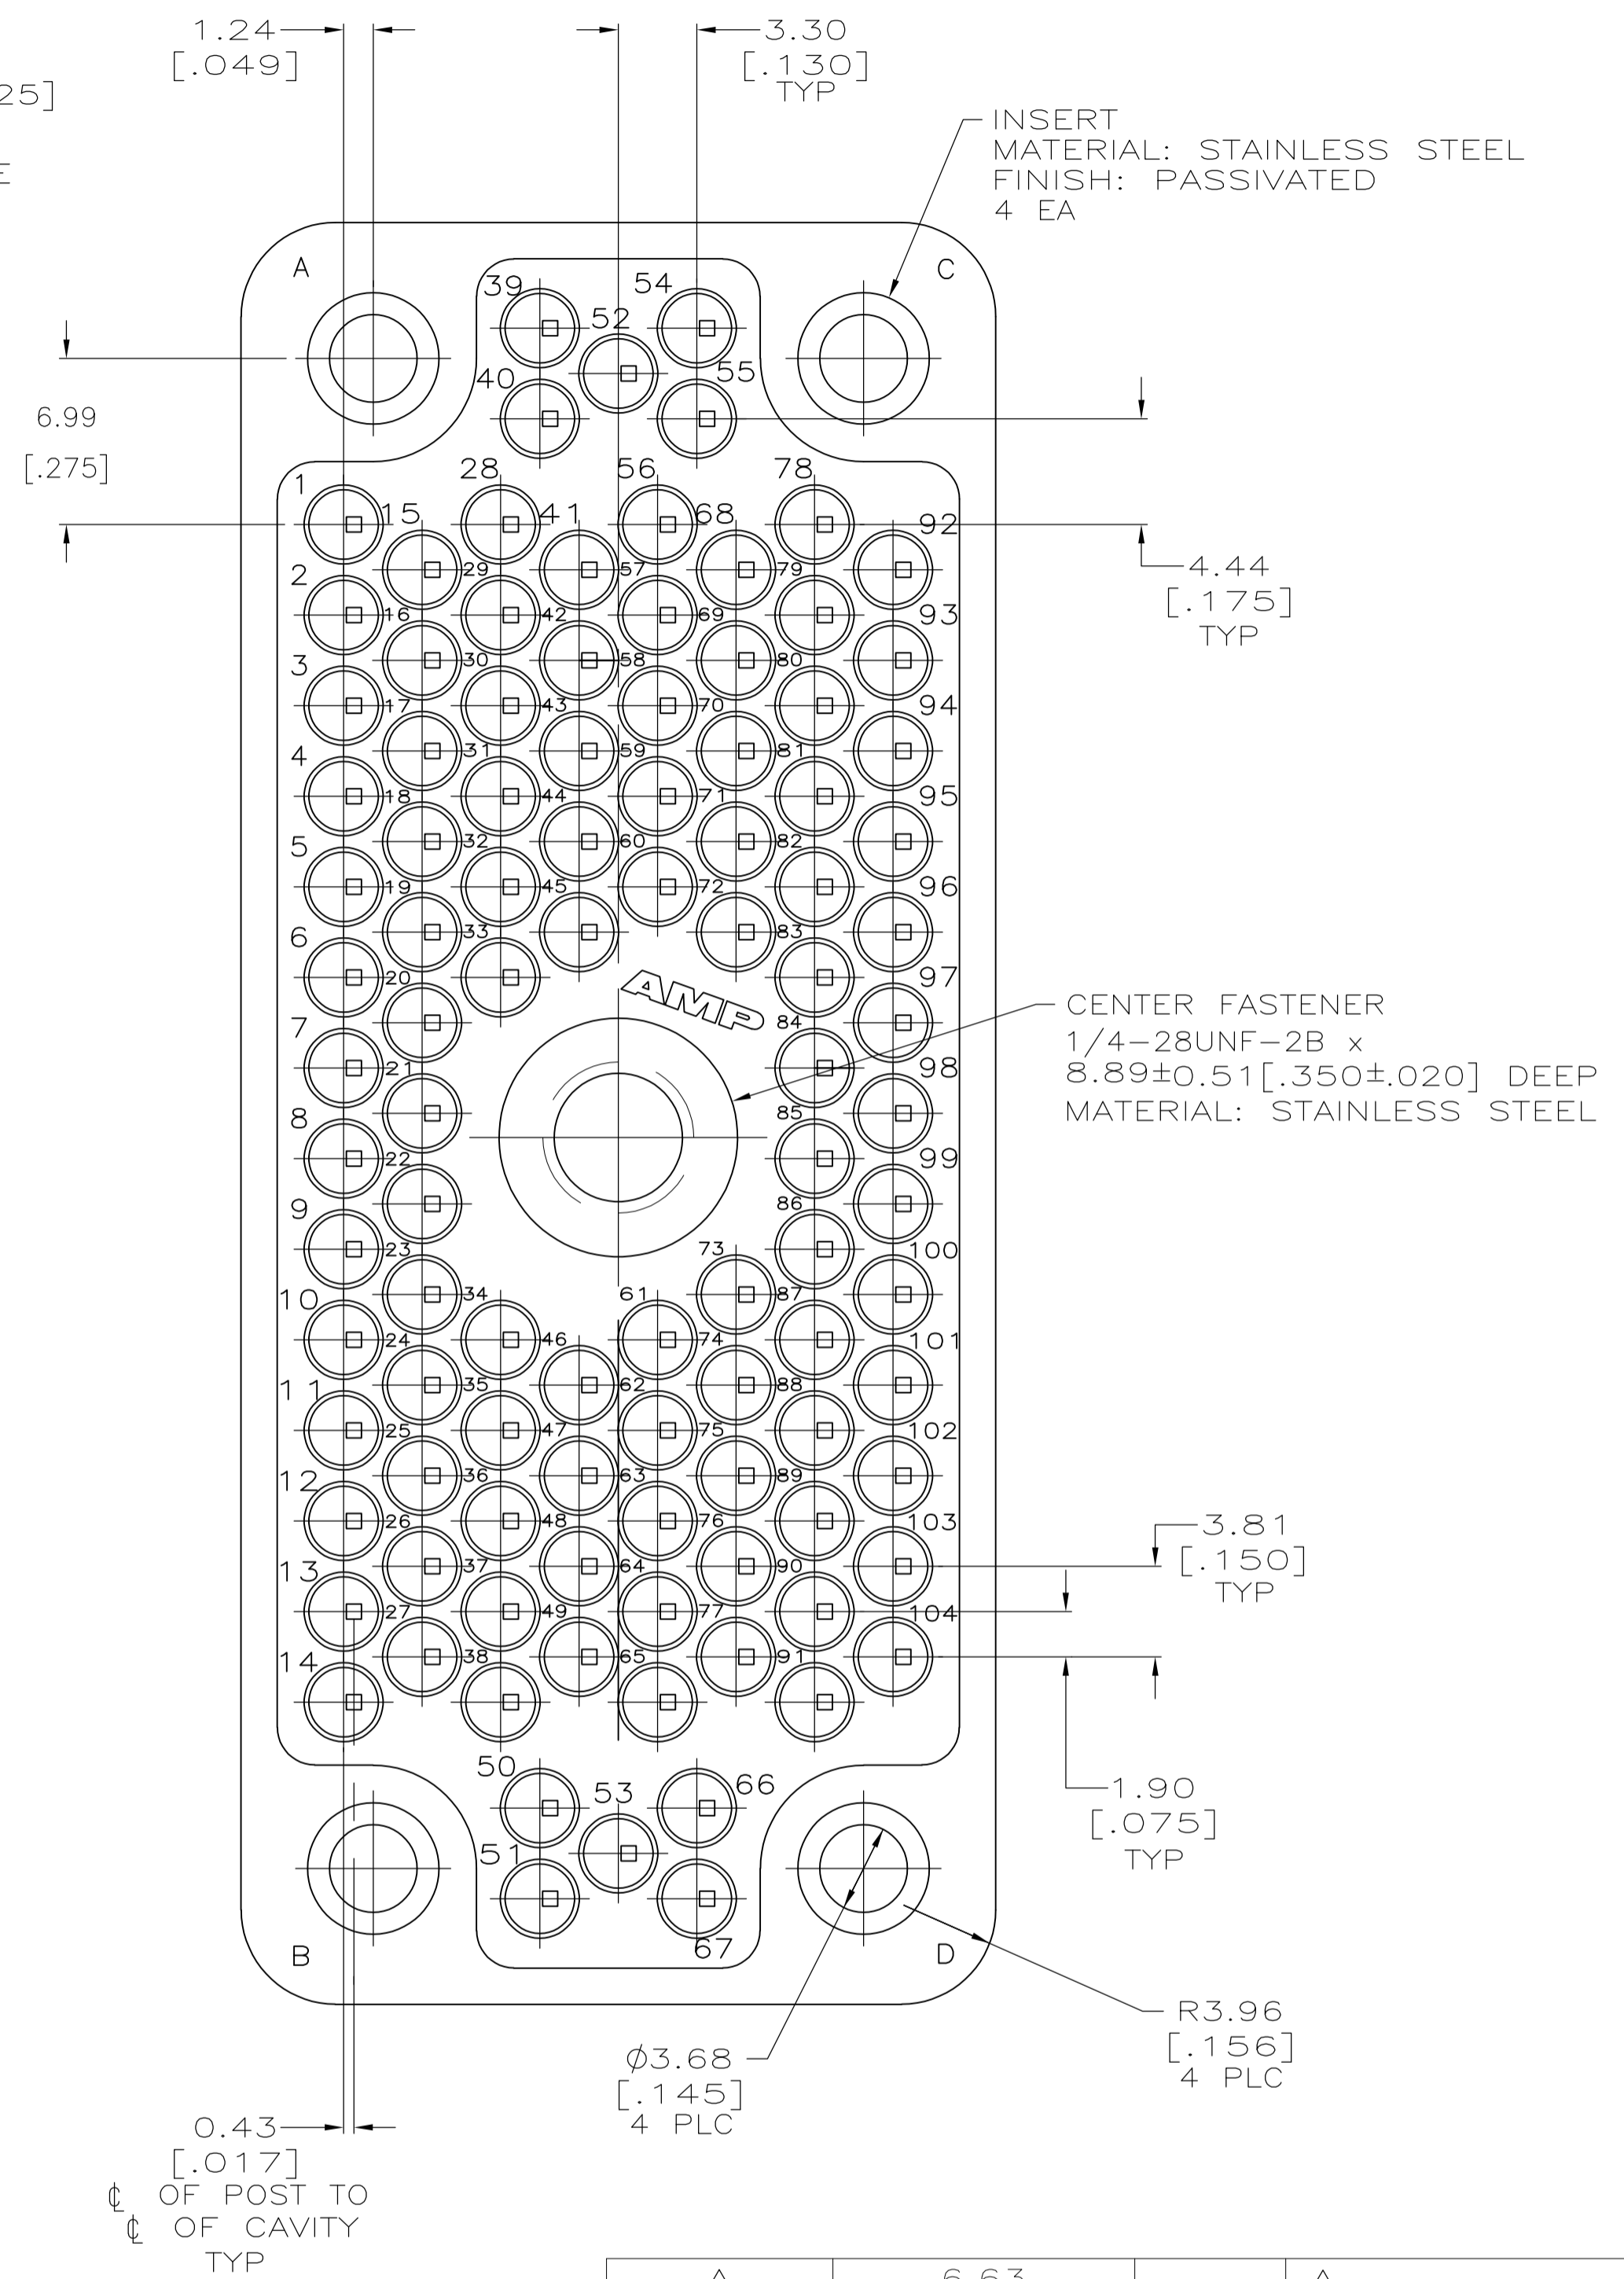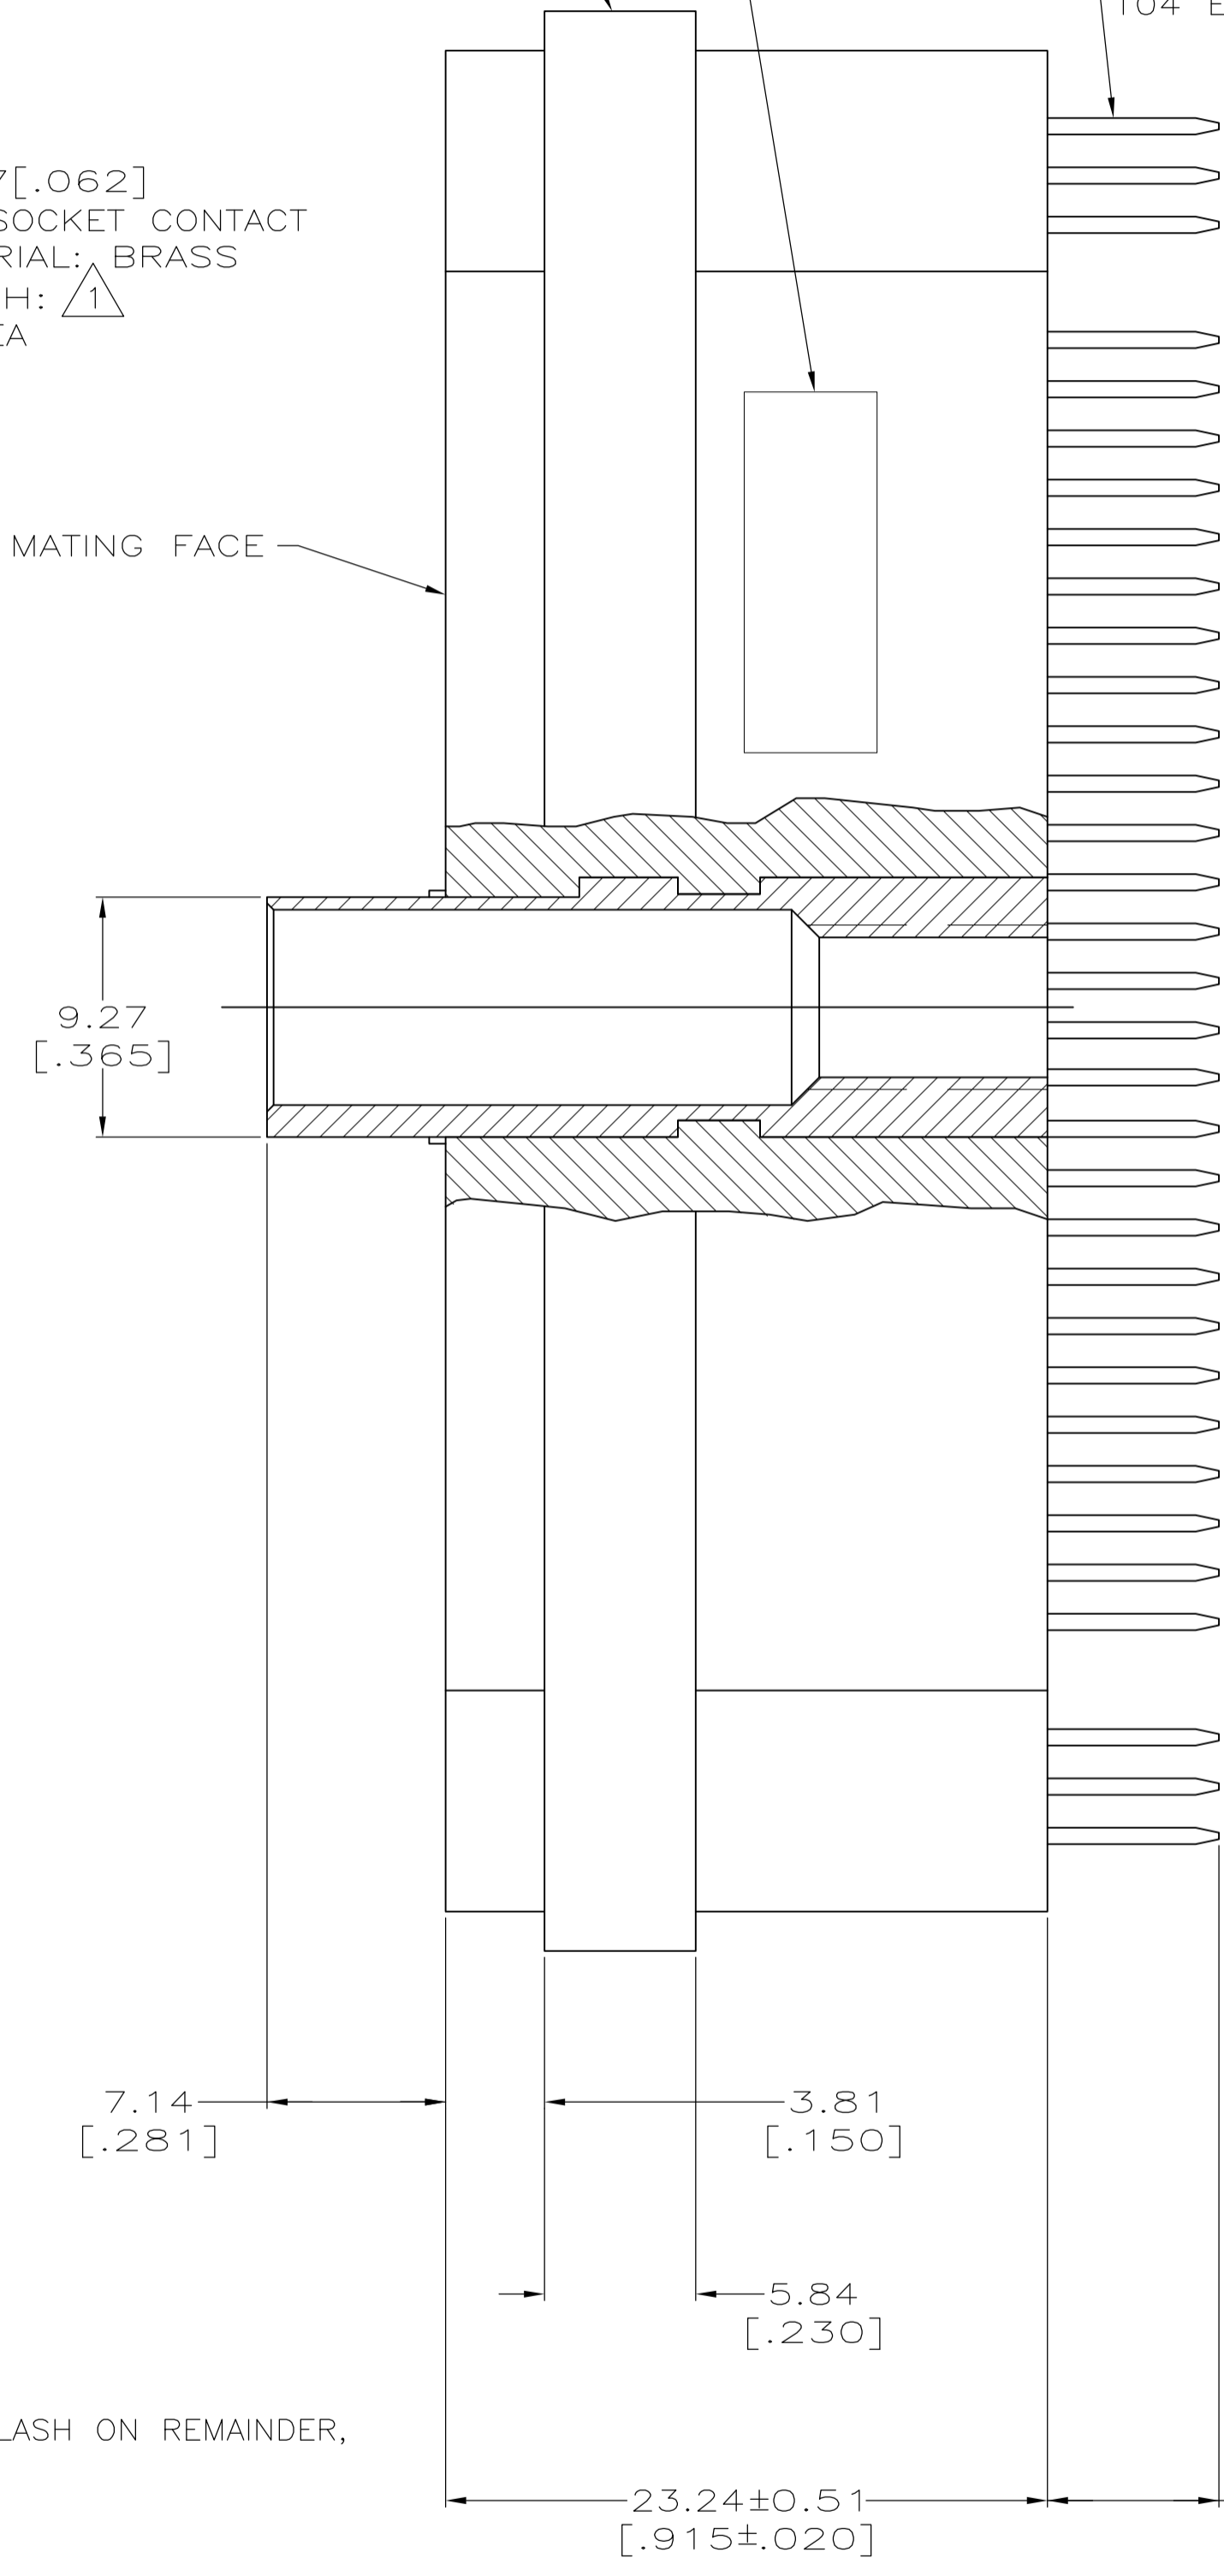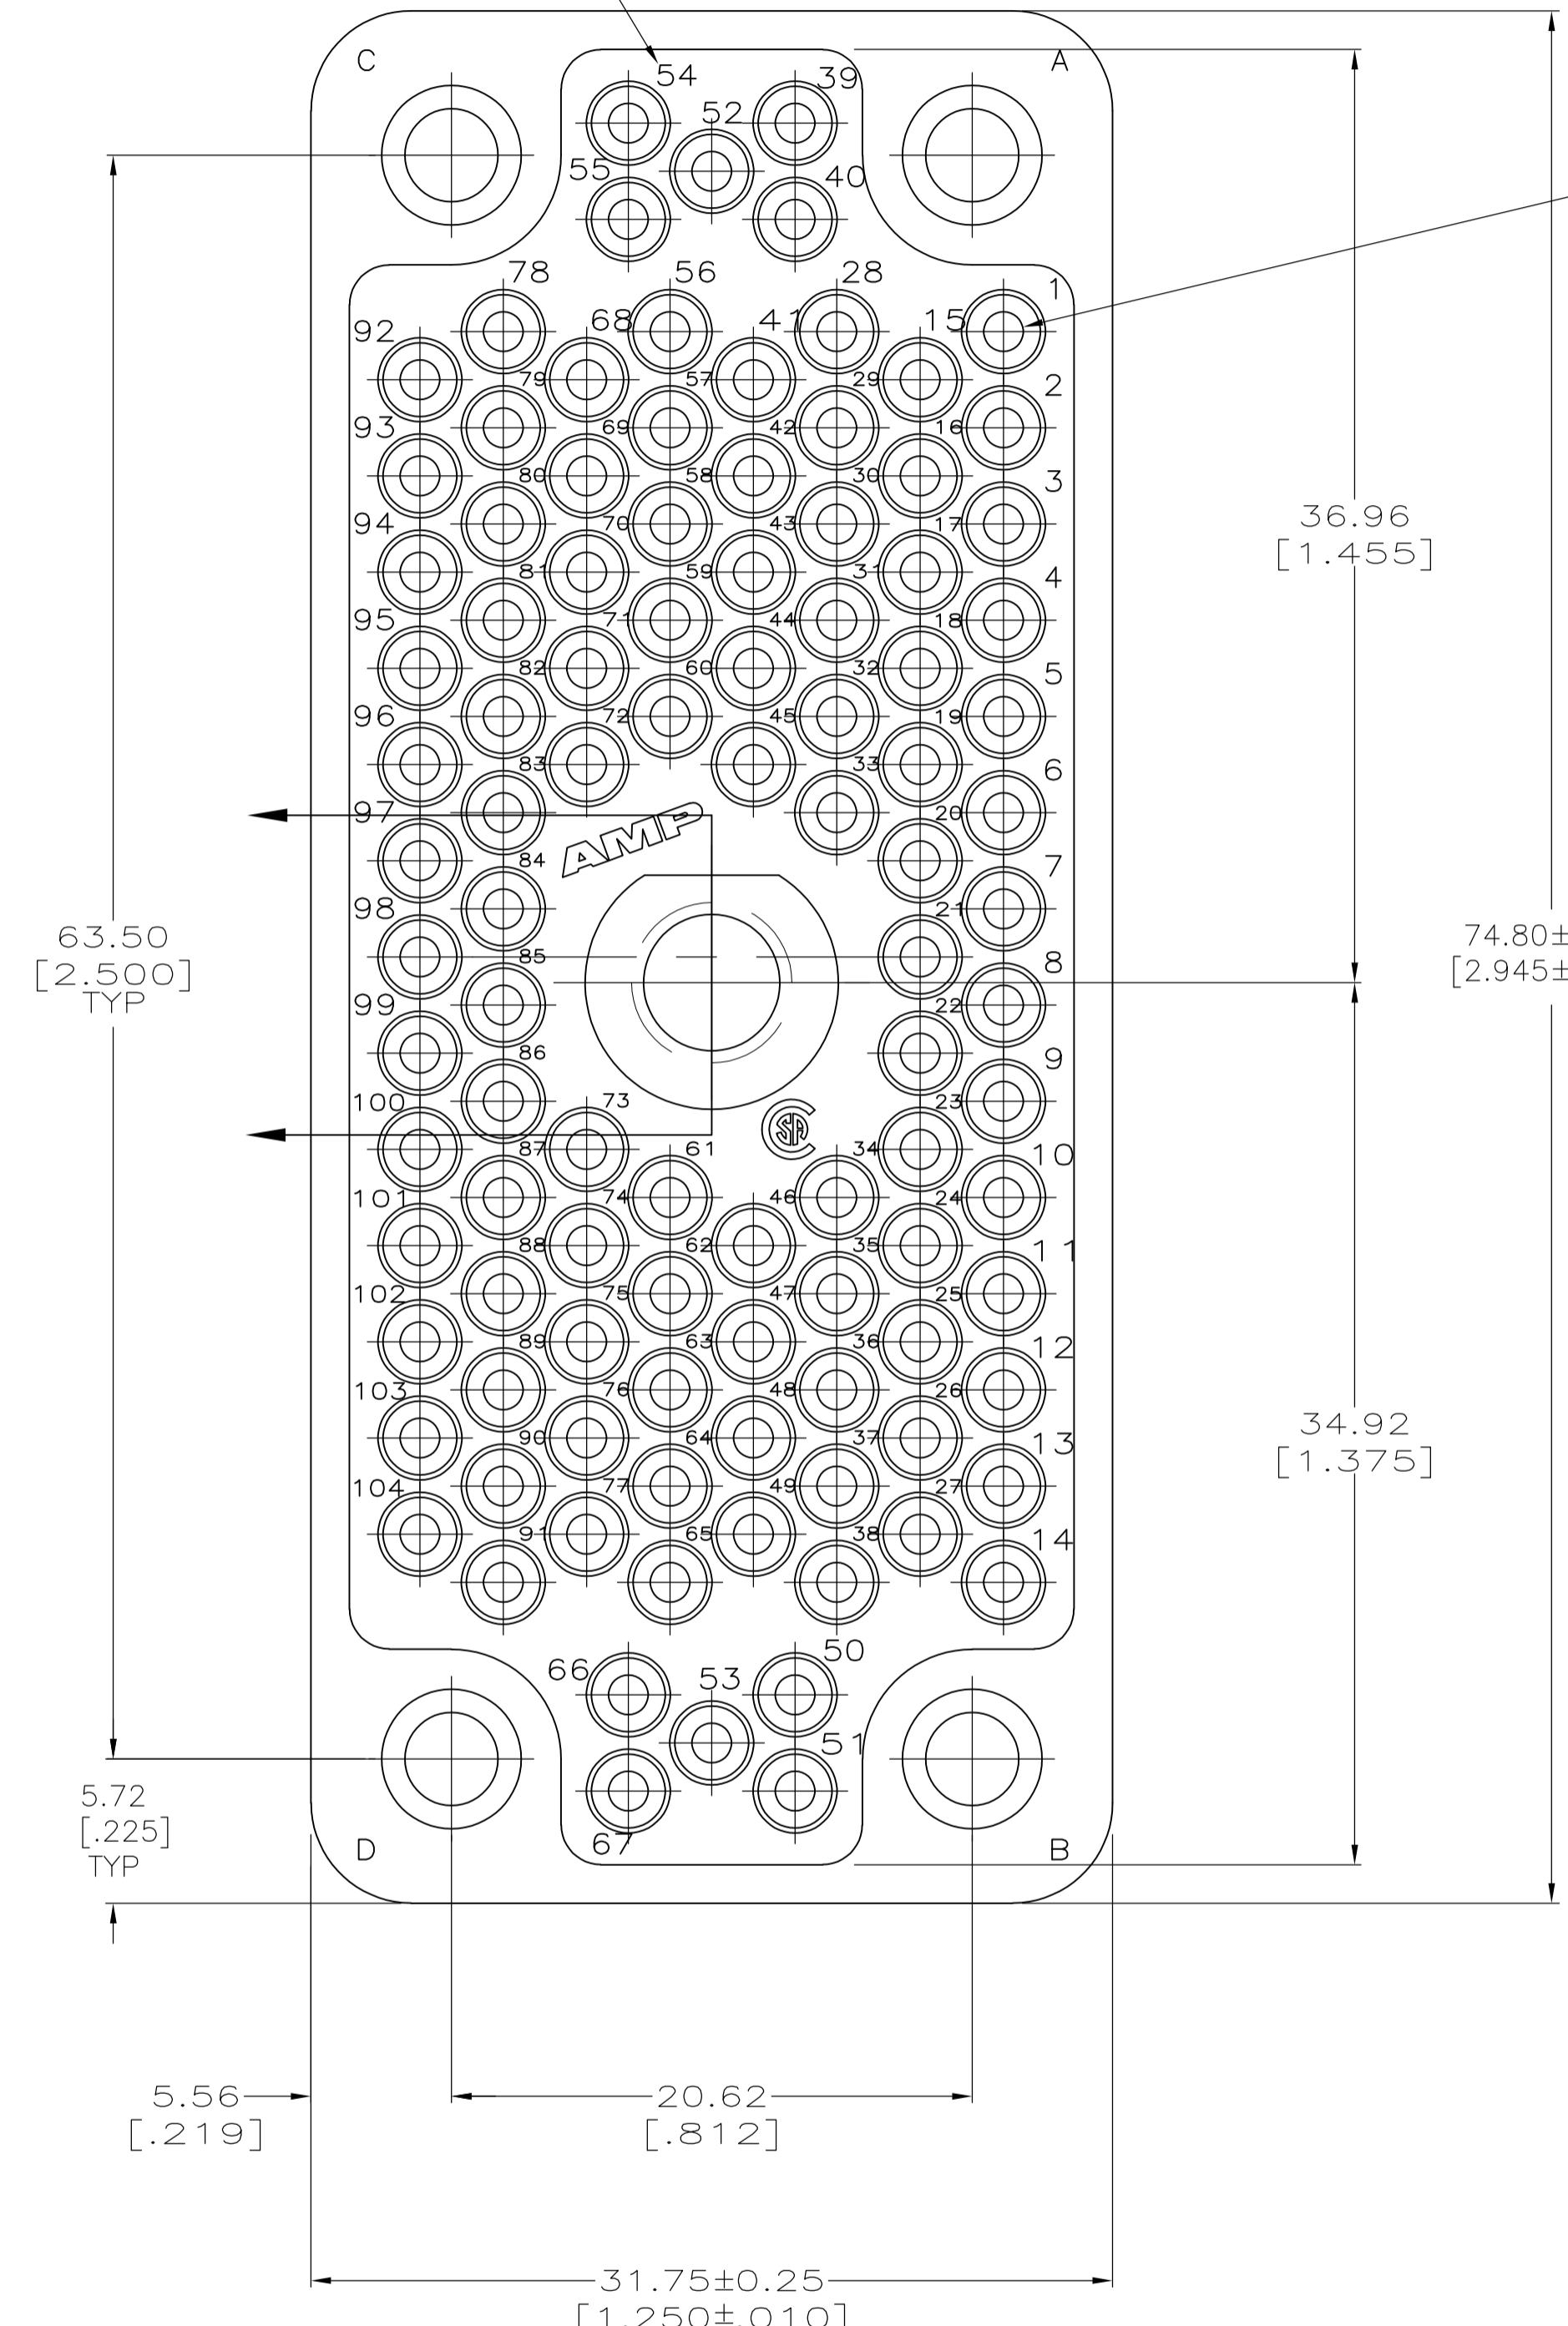

- Δ 1 0.76 μ m[.000030] MIN GOLD, INTERNALLY, FOR A LENGTH OF 5.08[.200] FROM MATING END WITH GOLD FLASH ON REMAINDER, ALL OVER 0.76 μ m[.000030] MIN NICKEL.
- Δ 2 POSTS ARE SEMI-AUTOMATICALLY WIREABLE AND WILL ACCOMODATE (SEE TABLE) TERMINATIONS.
- 3 #24 AWG MAX WIRE TO BE USED WITH THIS CONNECTOR.
- 4 FOR PANEL CUTOUT SEE AMP CUSTOMER DWG 201692.
- Δ 5 2.54 μ m[.000100] MIN TIN-LEAD OVER 1.27 μ m[.000050] MIN NICKEL.
- Δ 6 2.54 μ m[.000100] MIN TIN OVER 1.27 μ m[.000050] MIN NICKEL.
- Δ 7 GOLD FLASH OVER .000050 MIN NICKEL.
- Δ 8 PRELIMINARY NOT FOR PRODUCTION.
- Δ 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

FINISH	PLC	NO OF TERM	PART NUMBER
Δ 7	6.63 [.261]	1	Δ 8 1-205720-1
Δ 6	16.74 [.659]	3	1-205720-0
Δ 5	6.63 [.261]	1	205720-9
	16.74 [.659]	3	205720-2
	6.63 [.261]	1	205720-1
POST FINISH	A	NO OF TERM	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN: C. REIFSNYDER 14 FEB 96	Tyco Electronics Corporation
CHK: R. STONE 22 FEB 96	Harrisburg, PA 17105-3608
APPRO: M. MALONIS 22 FEB 96	
NAME: M. MALONIS	
PRODUCT SPEC: --	
APPLICATION SPEC: --	
SIZE: A1	00779 ©=205720
WEIGHT: --	
CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV Z1