



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## Introducing “Star Board” LED Pixel Holder



# “Star Board” LED Pixel Holder

## KEY FEATURES

- Design combines thermal and electrical connections to the hexagonal “Star” LED board configurations offered by LED manufacturers such as Philips/Lumileds, Cree, Osram, Seoul Semiconductor, and Nichia
- Design allows for versatility in mounting monochromatic and RGB “Star” LEDs without the need for solder (Note: RGB uses 4 wire common anode)
- Consists of a heat sink, locking ring, and contact carrier
- 3 Watts using standard Tyco Electronics heatsink\* tooled to fit in standard GU10/MR16 light fixtures
- Design fits into the same envelope as an MR16 with it’s socket
- Optional Tyco Electronics diffuser lens available
- Optional Tyco Electronics integral LED driver available
- Standard 110 FASTON Receptacle quick connects for easy Class 2 power wiring
- LED Holder allows for replacement of the star board after installation and can accommodate star board thicknesses in the range of 1.0mm to 2.5mm

## DESCRIPTION

Modular LED assembly holder that can be easily integrated into standard, direct lighting fixtures

Easy, snap-together solderless thermal and electrical termination

## APPLICATIONS

Plug and play capability which easily integrates into LED light fixtures

Used in: office, residential, or architectural lighting

## ELECTRICAL

Operating Current: Up to 2.5 Amps

Operating Voltage: Up to 50VDC

LED Wattage Rating\*: 0.5 to 3 Watts with Tyco Electronics heat sink

## MECHANICAL

Number of Positions: 2 contact loading for single-color LEDs and 4 contact loading for full color (RGB) LEDs

Wire Interface: Tyco Electronics 110 FASTON Receptacle

Durability: 10 cycles

Environmental Operating Temperature: -40 to 120 degree C

## MATERIALS

Contacts: Copper Alloy

Finish: Tin over Nickel

LED “Star” board: Customer supplied

Contact Carrier and Locking Ring: Plastic (PBT)

Heatsink: Cast Aluminum


## STANDARDS & SPECS

UL: UL 8750

Product Specification: 108-2350

Application Specification: 114-13227


\* NOTICE: A Proper LED Thermal Management Plan is Required for All High Power LED Applications. The standard Tyco Electronics heatsink was tested under 40 degree ambient conditions inside a typical GU10 style semi-enclosed track light fixture without any forced air cooling using a Philips LUMILEDS LUXEON III LED. Higher or lower wattage LEDs can be used with this holder if the application conditions are appropriate. The application conditions to be considered include: ambient temperature, airflow, light fixture design, enclosure volume, holder orientation, thermal interface material, the selected LED's thermal characteristics/limitations, and other application specific factors. The customer will need to test their fixture with their selected LED under the expected ambient conditions of the final application to determine if their complete application meets the LED's junction temperature requirements as specified by the LED manufacturer. If the LED's junction temperature requirements are exceeded, LED failure or reduced LED lumen maintenance can be expected. Please contact Tyco Electronics for technical assistance regarding this “Star Board” LED Pixel Holder if there are any questions about High Power LED Thermal Management.

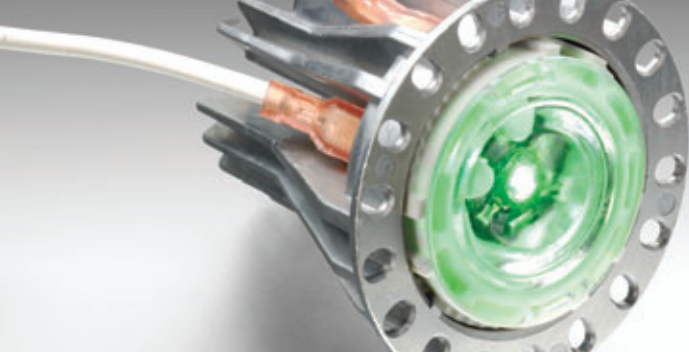

## “Star Board” LED Pixel Holder



### PRODUCT DRAWING

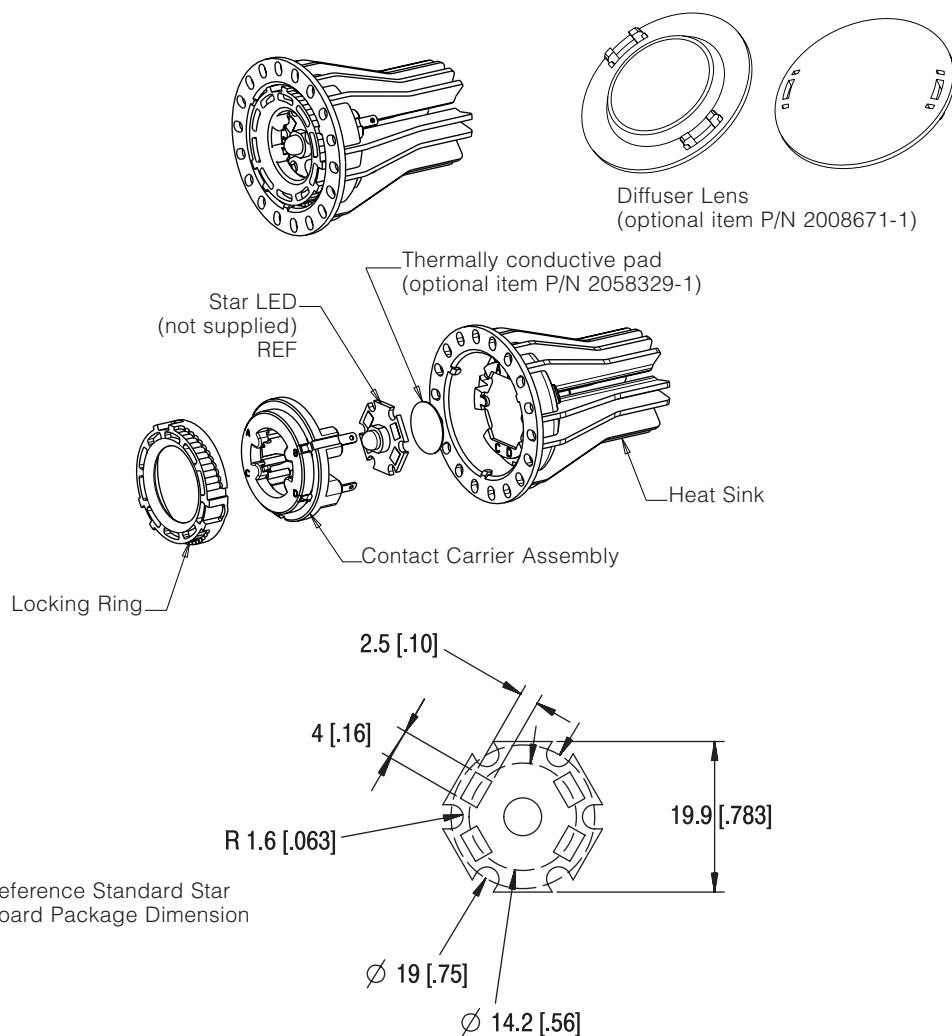

### PRODUCT OFFERING

- 2008675-1 “Star” LED Holder Kit (includes contact carrier, locking ring and heat sink)
- 2008671-1 Diffuser lens (optional)
- 2058329-1 Thermal Interface Pad (optional)

### APPLICATION TOOLING

Standard long nose pliers required to install locking ring

## FOR MORE INFORMATION

### Technical Support

Internet:	<a href="http://www.tycoelectronics.com">www.tycoelectronics.com</a>
E-mail:	<a href="mailto:newproducts@tycoelectronics.com">newproducts@tycoelectronics.com</a>
USA:	1-800-522-6752
Canada:	1-905-470-4425
Mexico:	1-800-733-8926
C. America:	52-55-1106-0803
South America:	55-11-2103-6000
Hong Kong:	852-2735-1628
Japan:	81-44-844-8013
UK:	44-8706-080208

**Tyco Electronics Corporation**  
Harrisburg, PA

**[tycoelectronics.com](http://tycoelectronics.com)**

Copyright 2008 Tyco Electronics Corporation. All rights reserved.  
1773452-1 - 5k -MS/FP - 7/2008.  
FASTON, TE Logo and Tyco Electronics are trademarks.

