



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-020-344 REV.: 2

## 3.0mm Multi-Color Round Type LED Lamps

PART NO. : 209SURSYGW/S530-A2 ECN : \_\_\_\_\_ Page: 1/5

### ■ Features :

- Two chips are matched for uniform light output, wide viewing angle
- Long life-solid state reliability
- I.C. compatible/Low power consumption

### ■ Descriptions :


The 209 LED lamp contain two integral chips and is available as both bicolor and bipolar types.

- The Hyper Red Light and Super Yellow Green light is emitted by diodes of AlGaInP and AlGaInP respectively.
- Type of bipolar lamps are both White Diffused and Color Diffused while the bicolor are White Diffused.

### ■ Applications :

- TV set
- Monitor
- Telephone
- Computer

### ■ Package Dimensions:

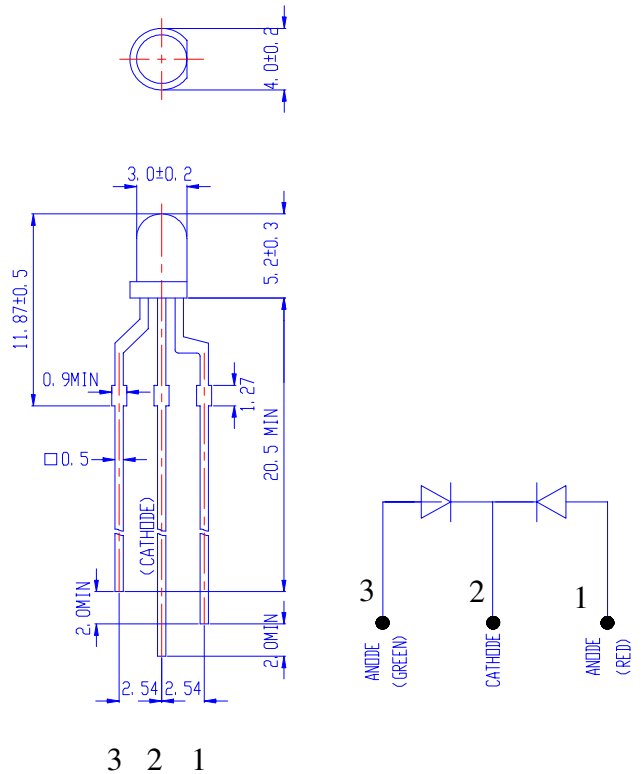

### ■ Notes :

1. All dimensions are in millimeters.
2. An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.
3. Tolerances unless Dimension ±0.25mm.

PART NO.	Chip		Lens Color
	Material	Emitted Color	
209SURSYGW/S530-A2	AlGaInP	Hyper Red	White Diffused
	AlGaInP	Super Yellow Green	

Office : 7C Building, Lian Hua Port Industrial District, Lian Hua Shan

Bonded Pricessing Zone Pan Yu, Guang Zhou, China

TEL. : (020)84860913,84860914

FAX : (020)84860600

http : //www.everlight.com



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-020-344 REV.: 2

3.0mm Multi-Color Round Type LED Lamps

PART NO. : 209SURSYGW/S530-A2

ECN :                      Page: 2/5

## ■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	IF	SUR/S530 25	mA
		SYG/S530 25	
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Power Dissipation	Pd	SUR/S530 60	mW
		SYG/S530 60	
Peak Forward Current (Duty 1/10 @ 1KHz)	IF(Peak)	SUR/S530 160	mA
		SYG/S530 160	
Reverse Voltage	VR	5	V

## ■ Electronic Optical Characteristics :







Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	SUR/S530	16.00	40.00	/	mcd IF= 20 mA
		SYG/S530	6.30	20.00	/	
Viewing Angle	2θ 1/2	/	80	/	deg	IF= 20 mA
Peak Wavelength	λ p	SUR/S530	/	632	/	nm IF= 20 mA
		SYG/S530	/	575	/	
Dominant Wavelength	λ d	SUR/S530	/	624	/	nm IF= 20 mA
		SYG/S530	/	573	/	
Spectrum Radiation Bandwidth	Δ λ	SUR/S530	/	20	/	nm IF= 20 mA
		SYG/S530	/	20	/	
Forward Voltage	VF	SUR/S530	/	2.0	2.4	V IF= 20 mA
		SYG/S530	/	2.0	2.4	
Reverse Current	IR	/	/	10	μ A	VR= 5 V



3.0mm Multi-Color Round Type LED Lamps

■ Typical Electro-Optical Characteristic Curves:

( SUR )

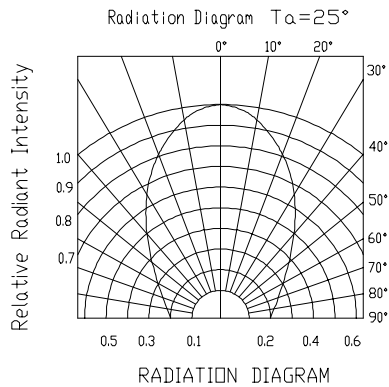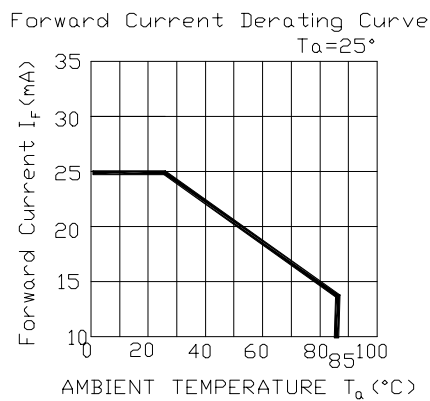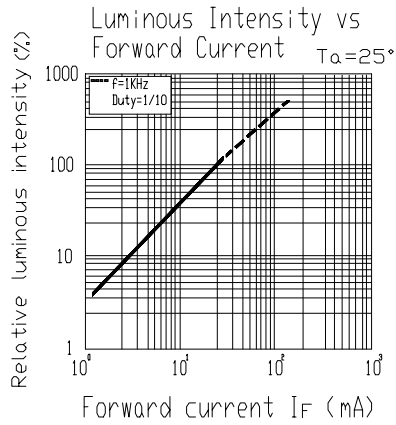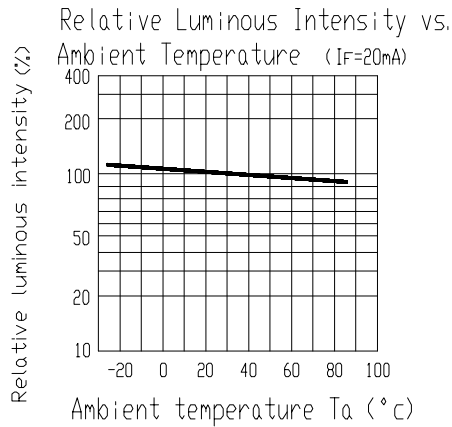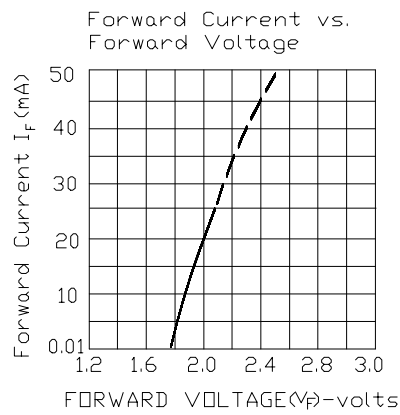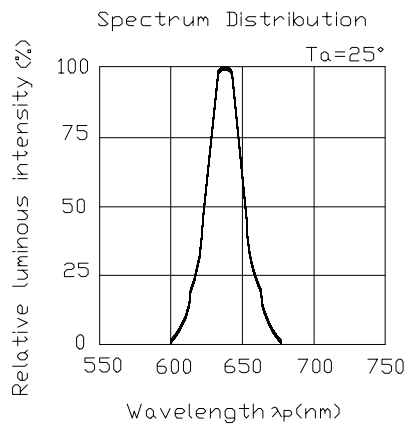



# EVERLIGHT ELECTRONICS CO.,LTD.







Device Number : CDLE-020-344 REV.: 2

3.0mm Multi-Color Round Type LED Lamps

PART NO. : 209SURSYGW/S530-A2 ECN : \_\_\_\_\_ Page: 4/5

## Typical Electro-Optical Characteristic Curves:

< SYG >

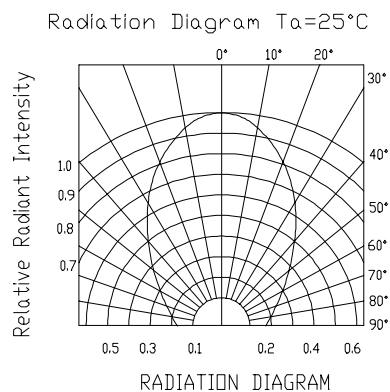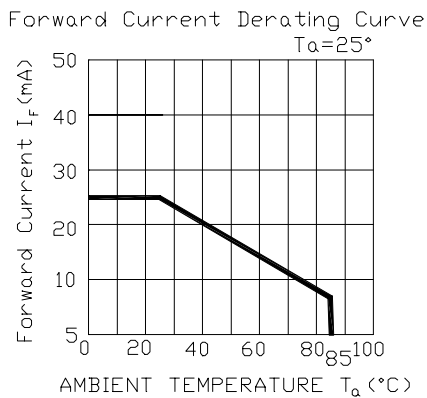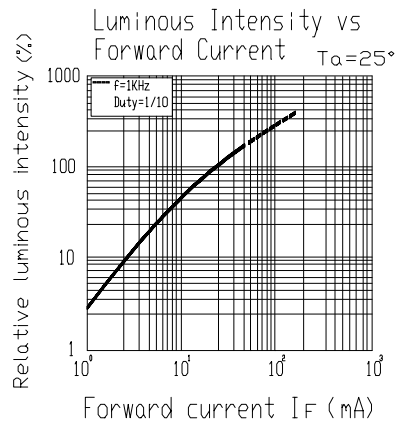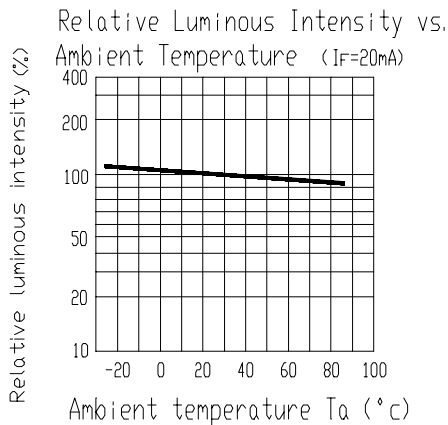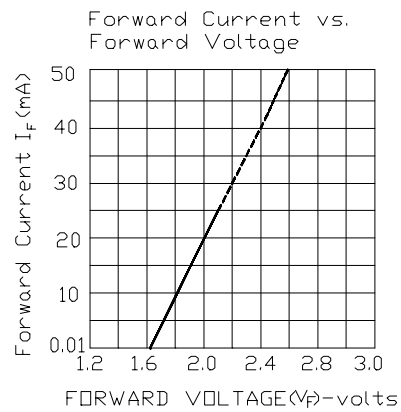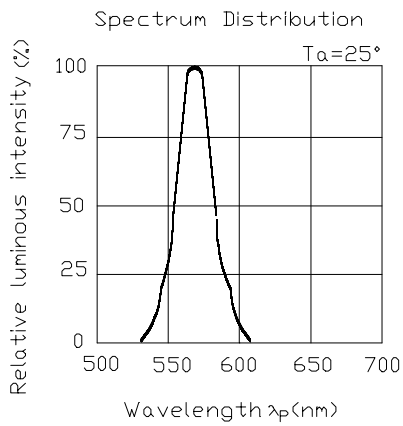



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-020-344 REV.: 2

3.0mm Multi-Color Round Type LED Lamps

PART NO. : 209SURSYGW/S530-A2 ECN :                      Page: 5/5

## ■ Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25°C IF = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 HRS	76 PCS	0/1