

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

## Schottky Rectifier, 20 A



### FEATURES

- 150 °C  $T_J$  operation
- Low forward voltage drop
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Designed and qualified for Q101 level

### DESCRIPTION

The 20TQ... Schottky rectifier series has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150 °C junction temperature. Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

PRODUCT SUMMARY	
$I_{F(AV)}$	20 A
$V_R$	35 to 45 V

MAJOR RATINGS AND CHARACTERISTICS			
SYMBOL	CHARACTERISTICS	VALUES	UNITS
$I_{F(AV)}$	Rectangular waveform	20	A
$V_{RRM}$	Range	35 to 45	V
$I_{FSM}$	$t_p = 5 \mu s$ sine	1800	A
$V_F$	20 Apk, $T_J = 125^\circ C$	0.51	V
$T_J$	Range	- 55 to 150	°C

VOLTAGE RATINGS					
PARAMETER	SYMBOL	20TQ035S	20TQ040S	20TQ045S	UNITS
Maximum DC reverse voltage	$V_R$				
Maximum working peak reverse voltage	$V_{RWM}$	35	40	45	V

ABSOLUTE MAXIMUM RATINGS						
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS	
Maximum average forward current See fig. 5	$I_{F(AV)}$	50 % duty cycle at $T_C = 116^\circ C$ , rectangular waveform		20	A	
Maximum peak one cycle non-repetitive surge current See fig. 7	$I_{FSM}$	5 $\mu s$ sine or 3 $\mu s$ rect. pulse	Following any rated load condition and with rated $V_{RRM}$ applied	1800		
		10 ms sine or 6 ms rect. pulse		400		
Non-repetitive avalanche energy	$E_{AS}$	$T_J = 25^\circ C$ , $I_{AS} = 4 A$ , $L = 3.40 \mu H$		27	mJ	
Repetitive avalanche current	$I_{AR}$	Current decaying linearly to zero in 1 $\mu s$ Frequency limited by $T_J$ maximum $V_A = 1.5 \times V_R$ typical		4	A	

**ELECTRICAL SPECIFICATIONS**

PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNITS	
Maximum forward voltage drop See fig. 1	$V_{FM}^{(1)}$	20 A	$T_J = 25 \text{ }^\circ\text{C}$	0.57	V	
		40 A		0.73		
		20 A	$T_J = 125 \text{ }^\circ\text{C}$	0.51		
		40 A		0.67		
Maximum reverse leakage current See fig. 2	$I_{RM}^{(1)}$	$T_J = 25 \text{ }^\circ\text{C}$	$V_R = \text{Rated } V_R$	2.7	mA	
		$T_J = 125 \text{ }^\circ\text{C}$		105		
Maximum junction capacitance	$C_T$	$V_R = 5 \text{ V}_{DC}$ (test signal range 100 kHz to 1 MHz) $25 \text{ }^\circ\text{C}$		1400	pF	
Typical series inductance	$L_S$	Measured lead to lead 5 mm from package body		8.0	nH	
Maximum voltage rate of change	dV/dt	Rated $V_R$		10 000	V/μs	

**Note**

(1) Pulse width &lt; 300 μs, duty cycle &lt; 2 %

**THERMAL - MECHANICAL SPECIFICATIONS**

PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS	
Maximum junction and storage temperature range	$T_J, T_{Stg}$		- 55 to 150	°C	
Maximum thermal resistance, junction to case	$R_{thJC}$	DC operation See fig. 4	1.50	°C/W	
Typical thermal resistance, case to heatsink	$R_{thCS}$		0.50		
Approximate weight			2	g	
			0.07	oz.	
Mounting torque	minimum		6 (5)	kgf · cm (lbf · in)	
	maximum		12 (10)		
Marking device		Case style D <sup>2</sup> PAK	20TQ035S		
			20TQ040S		
			20TQ045S		

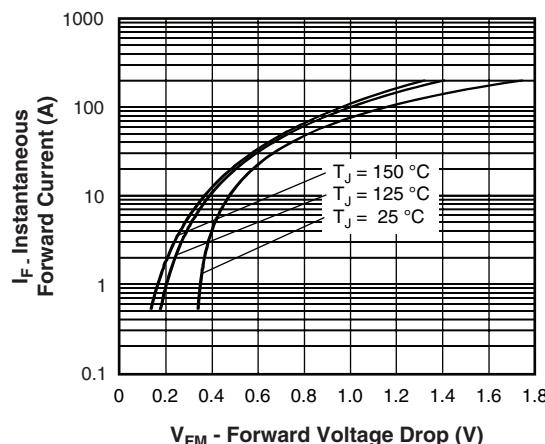


Fig. 1 - Maximum Forward Voltage Drop Characteristics

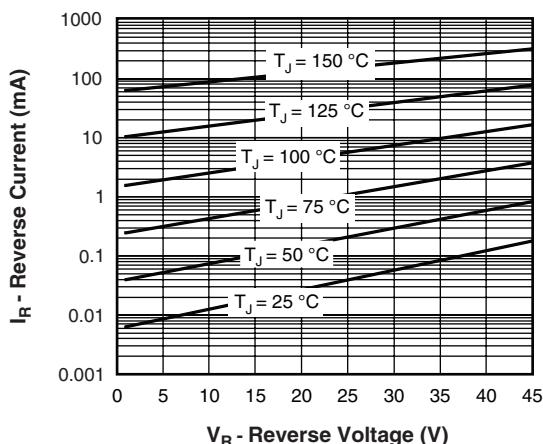


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage

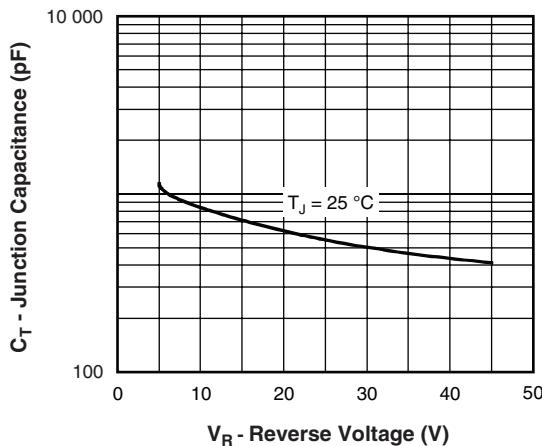


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

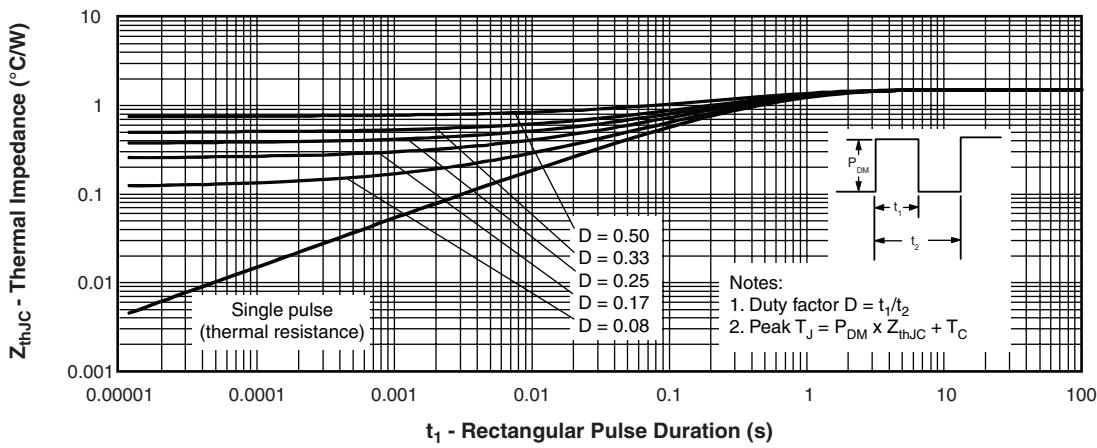


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

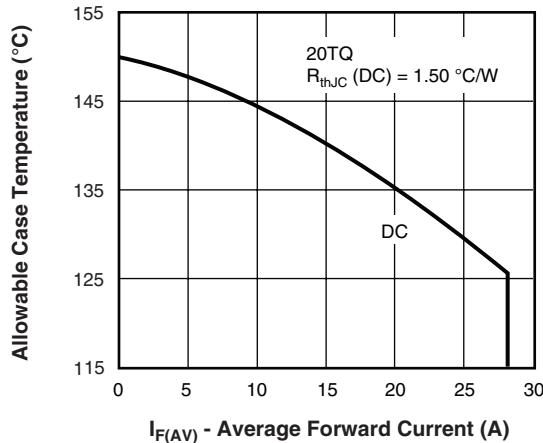


Fig. 5 - Maximum Allowable Case Temperature vs.  
Average Forward Current

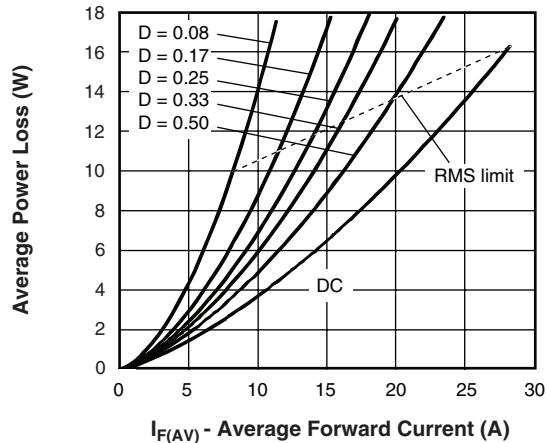


Fig. 6 - Forward Power Loss Characteristics

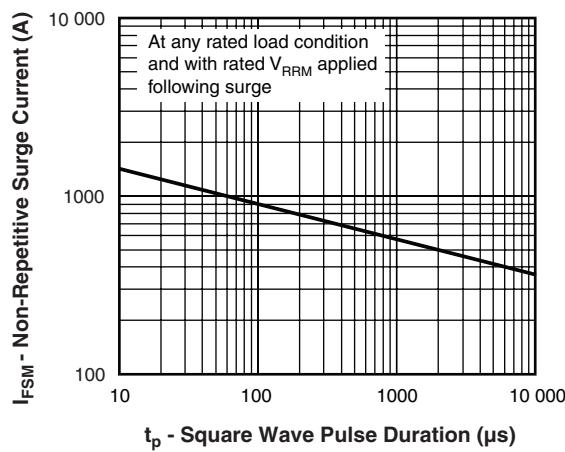


Fig. 7 - Maximum Non-Repetitive Surge Current

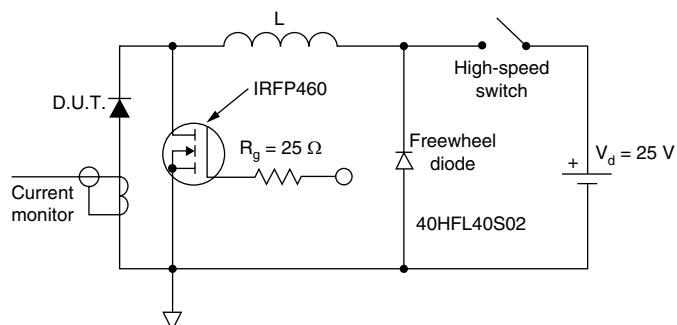


Fig. 8 - Unclamped Inductive Test Circuit

**ORDERING INFORMATION TABLE**

Device code	20	T	Q	045	S	TRL	-
	1	2	3	4	5	6	7
<b>1</b>	- Current rating (20 A)						
<b>2</b>	- Package: T = TO-220						
<b>3</b>	- Schottky "Q" series						035 = 35 V
<b>4</b>	- Voltage ratings						040 = 40 V
<b>5</b>	- • S = D <sup>2</sup> PAK						045 = 45 V
<b>6</b>	- • None = Tube (50 pieces) • TRL = Tape and reel (left oriented) • TRR = Tape and reel (right oriented)						
<b>7</b>	- • None = Standard production • PbF = Lead (Pb)-free						

LINKS TO RELATED DOCUMENTS	
Dimensions	<a href="http://www.vishay.com/doc?95014">http://www.vishay.com/doc?95014</a>
Part marking information	<a href="http://www.vishay.com/doc?95008">http://www.vishay.com/doc?95008</a>
Packaging information	<a href="http://www.vishay.com/doc?95032">http://www.vishay.com/doc?95032</a>

### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.