



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# V<sub>B</sub>SERIES GENERAL PURPOSE FILTERS



## INTRODUCTIONS

1. Designed as general purpose filter providing effective EMI suppression.
2. All part numbers are UL recognized, CSA certified and VDE approved.


## COMPONENTS

PARTNO.	L(mH)	Cx(uF)	Cy(pF)	R (Ohm)
03VBAG5	1.3	0.033	2200	-
03VBAW5				
05VBAG5	0.6			
05VBAW5				
10VBAG5	0.8			
10VBAW5				
10VBAS5				
20VBAG5	0.7			
20VBAS5				
30VBGS5	0.6			

## INSERTION LOSS(TYPICAL)

COMMON MODE(L-G) IN 50 OHMS SYSTEM						
CURRENT RATING	FREQUENCY-MHz					
	.15	50	1.0	5.0	10	30
3A	20	30	38	45	45	
5A	10	20	28	45	45	50
10A	13	20	22	35	35	50
20A	13	20	25	40	45	48
30A	8	21	26	34	37	38
DIFFERENTIAL MODE(L-L) IN 50 OHMS SYSTEM						
3A		2	8	40	35	30
5A		2	8	30	35	30
10A		2	8	30	30	30
20A		2	8	35	35	40
30A		10	15	45	50	42

## ELECTRICAL SCHEMATIC

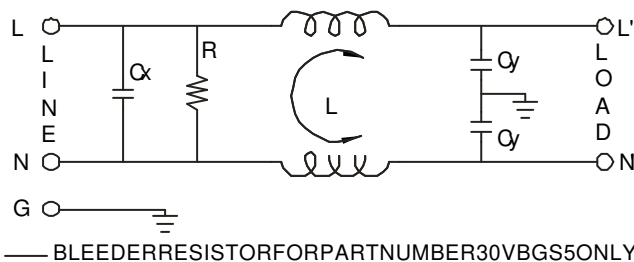

## SPECIFICATIONS


1. Maximum leakage current each line-to-ground @ 115VAC 60Hz: 0.20mA  
0.40mA (30VBGS5)  
@ 250VAC 60Hz: 0.40mA  
0.80mA (30VBGS5)
2. Hipot rating (one minute)  
line-to-ground: 2250VDC  
line-to-line: 1450VDC
3. Operating frequency: 50/60Hz
4. Rated voltage: 115/250VAC

## SERIES DIMENSIONS

PARTNO.	DIMENSIONS IN INCHES/mm											
	A	B	C	D	E							
03VBAG5	2.15	1.77	0.65	2.13	2.54							
	54.61					16.5						
03VBAW5	0.96		2.13				16.5					
	24.38											
05VBAG5	2.54		44.9			0.79	54.1	64.5				
	64.52								20.0			
05VBAW5	1.33					2.13				20.0		
	33.78											
*10VBAG5	2.54					51.3			1.16	2.38	2.77	
	64.52											29.5
*10VBAW5	1.33	2.38		29.5								
	33.78											
*10VBAS5	3.10	2.02		1.15	3.75				4.14			
	78.74											60.5
20VBAG5	3.25		86.36	29.2			95.25	105.2				
	82.55											70.3
20VBAS5	3.37			3.40								
	85.6											
30VBGS5	5.25			3.40		1.52				3.75	4.14	
	133.4											38.6

- \* VDE approved to 8A/250VAC
- \* VDE approved to 16A/250VAC


## MINIMUM INSERTION LOSS IN dB

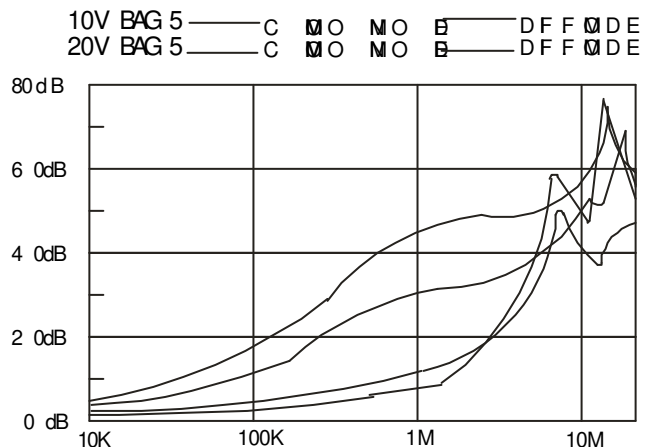

**MECHANICAL CONSTRUCTION**




AW5

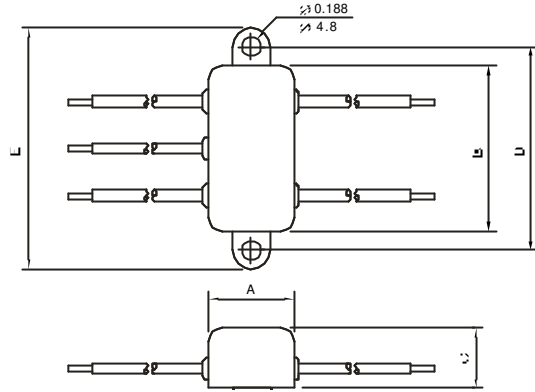


ALL WIRE LEADS 4.0" LONG MIN.




AG5

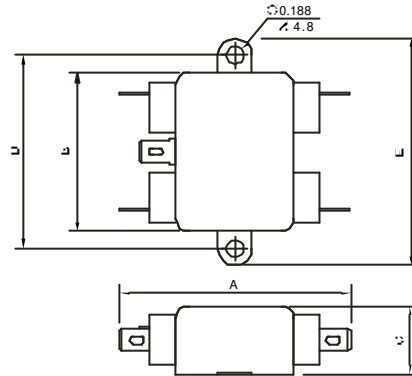

AS5

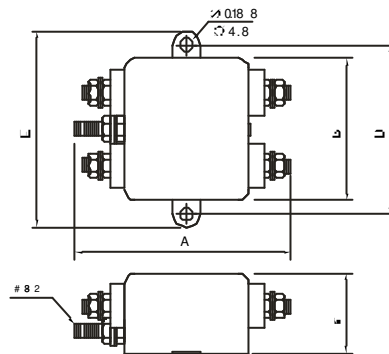

GS5



UNIT:  $\frac{\text{INCH}}{\text{mm}}$